

DX-70

Service Manual

CONTENTS

| | |
|----------------------------|----|
| ● SPECIFICATIONS..... | 1 |
| ● CIRCUIT DESCRIPTION..... | 2 |
| ● SEMICONDUCTOR DATA..... | 12 |
| ● EXPLODED VIEW | 21 |
| ● PARTS LIST..... | 28 |
| ● ADJUSTMENT..... | 42 |
| ● PC BOARD VIEW..... | 49 |
| ● BLOCK DIAGRAM..... | 58 |
| ● CIRCUIT DIAGRAM..... | 59 |
| ● EDX-1..... | 65 |

SPECIFICATIONS

1) General

| | |
|---------------------------|--|
| Operating mode | J3E(LSB,USB), A1A(CW), F3E(FM) |
| Number of memory channels | 100 |
| Antenna impedance | 50 Ω unbalanced |
| Power requirement | 13.8 V DC ± 15% (11.7 to 15.8 V DC) |
| Grounding method | Negative ground |
| | 1.0 A max. |
| Current drain | 20 A max. |
| | -10 °C to +60 °C |
| Operating temperature | ± 10 ppm (-10 °C to +50 °C) |
| Frequency stability | 178(w) X 58(h) X 228(d) mm (179 X 71 X 268 mm for projections included) |
| Dimensions | |
| Weight | Approx. 2.7 kg |

2) Transmitter

| | | |
|--|-------------|------------------------|
| Transmit frequency coverage (e.g. U.S. Version) | 160 m band | 1.8000 to 1.9999 MHz |
| | 80 m band | 3.5000 to 3.9999 MHz |
| Power output | 40 m band | 7.0000 to 7.2999 MHz |
| | 30 m band | 10.1000 to 10.1499 MHz |
| | 20 m band | 14.0000 to 14.3499 MHz |
| | 17 m band | 18.0680 to 18.1679 MHz |
| | 15 m band | 21.0000 to 21.4499 MHz |
| | 12 m band | 24.8900 to 24.9899 MHz |
| | 10 m band | 28.0000 to 29.6999 MHz |
| | 6 m band | 50.0000 to 53.9999 MHz |
| HF band | SSB, CW, FM | 100 W (high) |
| | AM | Approx. 10 W (low) |
| 50 MHz band | SSB, CW, FM | 40 W (high) |
| | AM | Approx. 4 W (low) |
| Modulation system | SSB | 10 W (high) |
| | AM | Approx. 1 W (low) |
| FM | SSB | 4 W (high) |
| | AM | Approx. 0.4 W (low) |
| | | Balanced modulation |
| | | Low power modulation |
| | | Reactance modulation |

Transmitter (continued)

| | | |
|--------------------------------|-------------------------|--|
| Spurious emission | HF bands 50 MHz band | Less than -50 dB (-45 dB in 10 MHz band) Less than -60 dB |
| Carrier Suppression | | More than 40 dB |
| Sideband suppression | | More than 50 dB (at 1 kHz) |
| Maximum FM deviation (default) | HF bands 50 MHz band | ± 2.5 kHz ± 5 kHz |
| Microphone impedance | | 2 kΩ |

3) Receiver

| | | |
|-------------------------------------|---|--|
| Receiver circuitry | Double conversion superheterodyne | |
| Receive frequency range | 0.1500 MHz to 30.0000 MHz, 50.0000 MHz to 54.0000 MHz | |
| Intermediate frequency | | 71.75 MHz (1st) 455 kHz (2nd) |
| | SSB, CW (S/N 10 dB) | 0.5 to 1.8 MHz 1.8 to 30 MHz 50 to 54 MHz |
| Sensitivity | AM (1 kHz, 30%, Mod, S/N 10 dB) | 0 dB (1 μV) -12 dB (0.25 μV) -16 dB (0.15 μV) +20 dB (10 μV) |
| | FM (1 kHz, 3.5kHz, DEV, SINAD 12 dB) | 0.5 to 1.8 MHz 1.8 to 30 MHz 50 to 54 MHz |
| Selectivity | SSB, AM (Narrow) | 28 to 30 MHz 50 to 54 MHz |
| | SSB (Narrow), CW (Standard), CW (Narrow), FM | 2.4 kHz/-6 dB, 4.5 kHz/-60 dB 1.0 kHz/-6 dB, 3.0 kHz/-60 dB 500 Hz/-6 dB, 3.0 kHz/-60 dB 9 kHz/-6 dB, 20 kHz/-50 dB |
| Supertors and image rejection ratio | | More than 70 dB |
| Audio output power | | More than 2.0 W (at 8 Ω, 10% THD) |
| RIT/XTIT range | | ± 1.4 kHz |

CIRCUIT DESCRIPTION

1. Receiver System

1) Filter Unit

a. HF Antenna Input

SA501 and RS27 are installed in the input part of HF antenna terminal as the countermeasure against the thunder.

The electric charge of HF antenna is discharged at RS27, and when the voltage becomes over about 300V, the gap of SA501 is discharged so that the receiving input circuit is protected.

The input signal from HF antenna is passed through the transmission/reception selecting relay RL513. The followings are prevented in LPF consisting of L525, L526, C580, C581 and C582: 2m band image receiving, passing through the First IF (71.75MHz) and leaking of the first local oscillating frequency (72~130MHz) to the antenna terminal.

b. 50MHz Antenna Input

The receiving signal from the antenna of 50MHz band is passed through the LPF for transmission/reception and passed through the transmitting power detection circuit, then led to transmission/reception switching circuit consisting of D508 and D509, and to HPF. The signal is amplified about 8dB in C503. Because the space noise in 50MHz band is less than it in HF band, its exclusive receiving preamplifier is equipped to get high sensitivity.

The receiving signal of 50MHz or HF is selected in RL514, then after passing through the attenuator circuit (ON/OFF) of about 20dB consisting of RL515, RS28 and RS31 the signal is led to the Main unit.

2) Main Unit

a. Front End

The receiving signal output from Filter Unit is led to Main unit through CN2. HPF, consisting of L19, L20, C47, C48, C49, C50, C51 and C52, eliminates the strong radio signal of MW band of 1.6MHz or below. In case of receiving the signal of 1.6MHz or below, the sensitivity is controlled by the attenuator in R37 and BPF1, also the signal is separated into 1.6MHz, over or below.

5 BPF units consists of 9 filters. Each filter covers the following frequency range. The frequency of 2.5MHz or more consists of Chebyshev BPF, and under 2.5MHz frequency band is LPF. Two BPF's are installed on the same unit. Not to be influenced so much, the distant frequency band BPF's are combined.

| | | |
|----------------|------|-----------|
| - 1.6MHz | BPF1 | |
| 1.6 - 2.5MHz | BPF2 | 1.8MHz |
| 2.5 - 4.5MHz | BPF3 | 3.5MHz |
| 4.5 - 7.5MHz | BPF4 | 7MHz |
| 7.5 - 10.5MHz | BPF1 | 10MHz |
| 10.5 - 14.5MHz | BPF2 | 14MHz |
| 14.5 - 21.5MHz | BPF3 | 18, 21MHz |
| 21.5 - 30MHz | BPF4 | 24, 28MHz |
| 50 - 54MHz | BPF5 | 50MHz |

Passing through BPF, the signal turns ON/OFF in the switching diode, D29 and D30. This preamplifier is the parallel grounded gate operation of Q9 and Q10 (2SK2171), so the unit can obtain a good performance at a high level input signal with low NF.

The wide range frequency from about 1MHz to 60MHz is amplified about 10dB. This 10dB preamplifier and 20dB attenuator in the Filter unit are combined, then by pressing RF gain switch on the front panel, one of four steps, -20, -10, 0, or +10dB is selected.

The LPF, consisting of L52, L53, L54, C103, C104, C105, and C106, prevents the following first receiving mixer from the local oscillation leaking, and also prevents the first IF and image of the spurious receiving.

The first receiving mixer consisting of Q10 and Q11 is the balanced mixer; in which the local oscillating signal is led to the gate of 2SK2171.

The 3rd intercept point is about 20dBm, and local oscillator of about 2V P-P is led to the gate. The receiving signal is converted into the first IF of 71.75MHz.

As the ratio of the spurious interference is decreased in 50MHz band mode, the trap of 71.75MHz consisting of L72 and C107 keeps the ratio of spurious interference 70dB or more in all band.

b. The First IF Amplifier Circuit

FL1: A and FL1: B are the crystal filters of 71.75MHz. By the combination of two filters, the unit has the characteristics of the band width of 15kHz or more/3dB and the value of guaranteed attenuation of 70dB or more. Here the image ratio is determined 70dB or more (approx. 80dB). The first IF amplifier circuit of Q12 is located between the crystal filters to prevent the loss in the front-end and mutual interference.

The first IF amplifier circuit Q12 decides the sensitivity after passing the mixer. AGC voltage is applied to the second gate.

c. The Second Mixer Circuit, The Second Amplifier Circuit

DBM (Double Balanced Mixer) consists of L14, D7 and L16. The signal is passed in the opposite direction while receiving or transmitting in this DBM. Approximately 0dBm is fed as the second local oscillating level, and the third IP is approximately 10dBm.

The receiving signal (71.75MHz) and the second local oscillating frequency (71.295MHz) is mixed, and unwanted signal is eliminated in LPF consisting of L17, L73 and C36, then the signal of 455kHz is generated. After passing through the switching diode D8, the signal is amplified in Q22. The source of Q22 is controlled by the output of the noise blanker circuit.

d. IF Filter

After passing through the transmission/reception switching diode D9, the signal is led to one of three ceramic filters of 455kHz. The selectivity is decided here except CW narrow.

| | | | |
|----------------|---------------|-------------|--------------|
| SSB, AM-NARROW | FL3(CFJ455K5) | 2.4kHz/-6dB | 4.5kHz/-60dB |
| SSB-NARROW, CW | FL2(CFJ455K8) | 1.0kHz/-6dB | 3.0kHz/-60dB |
| FM, AM | FL4(CFW455G) | 9kHz/-6dB | 20kHz/-50dB |

Each filter has 4 switching diodes (D3~D4B) in front and rear to isolate the filter.

The isolation is required the value of guaranteed attenuation of each filter (approx. 70dB) or more. The diode connected in parallel in front and rear of no used filter is short and the diode connected in series is open. The combination of open and short is used to get the high isolation.
The modes, transmission/reception and wide/narrow of this filter are selected by Q36-Q46, D79, D80, D82, D83, D84.

e. The Second IF Amplifier Circuit

After passing through the filter, the signal is led to the transmission/reception switching diode D49, and amplified in Q23 and Q24, then buffered in Q25.

The AGC voltage is applied to the second gate of Q22, Q23 and Q24.

The output level of Q25 is fixed because the AGC voltage is added to the receiving signal.

This output signal is used for the demodulation in SSB, AM and CW modes and AGC detection.

In the FM mode, after passing through the transmission/reception switching diode of D49, a part of receiving signal is led to IC7(MC3357) from C221, then it is IF-amplified and demodulated. C214 is connected in parallel to the feedback resistor R182, and the resistor is de-emphasized. Even in the FM mode, Q23, Q24 and Q25 are active, also AGC is operated.

f. Demodulation Circuit

In SSB and CW modes, the following local oscillating frequency is supplied from PLL unit to IC3 balanced mixer, then the signal is demodulated.

The receiving signal is led to Pin1, and local oscillation Pin3, then picked up the demodulation output of approximately 100mV from Pin7.

| | | | |
|-----|----------|-----|-------|
| USB | 456.5kHz | +IF | SHIFT |
| LSB | 453.5kHz | +IF | SHIFT |
| CWU | 455.8kHz | +IF | SHIFT |
| CWL | 454.2kHz | +IF | SHIFT |

The output is led to the switching circuit of each mode, and to the CW audio filter.

In AM mode, the signal is detected in D51, then led to IC5.

In FM mode, the signal is demodulated and de-emphasized in above-mentioned IC7, then led to IC5.

g. CW Audio Filter

IC4 is the active filter, which consists of the combination of low-pass filter and high-pass filter in the operational amplifier. It has the band width of about 600Hz (-6dB) centering the frequency of about 800Hz.

h. AF, AGC Time Constant Selection

IC5 is the analogue multiplexer which has 2 circuits with 4 contact points, and switches the demodulation output in every mode and AGC time constant. The voltage combined in D55 and D56 is input to Pin9 and Pin10, then the output of IC3 (SSB, CW-W), the modulation output of FM/AM and CW audio filter output (CW-N) are selected. The voltage of BV is applied to Pin6 (INHIBIT) when transmitting, and the modulation output is turned OFF unconditionally.

i. AF Amplifier

The voltage that can pass through the analogue switch of IC5 is very low. The voltage is amplified approximately 20dB in IC12: B to get higher AF input voltage to following IC13 (voltage controlled electronic volume). Also a part of this output is picked up and output to Pin6 of microphone as non-squelched audio output. This output is used as the terminal of packet, RTTY, SSTV, etc.

j. Electronic Volume, AF Amplifier

IC13 is the dual electronic volume controlled by the voltage.

The volume is controlled by the AF GAIN VR on the front panel. Pin5 is the control terminal. The value of the attenuation is the minimum when the control voltage is about 3.4V, and the value is 90dB or more at maximum when the control voltage is about 3.1V.

One of the circuits is for volume control of the demodulation sound, and the other for the volume control of the beep and sidetone. The beep and sidetone can be heard even if the volume is set to the minimum point and sound tone is related with AF GAIN VR.

The squelch circuit (IC14: A, Q14) controls Pin5. The output of IC14: A activates to close the squelch when transmitting, so Q14 is turned OFF in D85 to control the volume of the sidetone.

The receiving sound is led to Pin6 and applied from Pin7. As for the beep and side tones, Pin2 is for input and Pin1 for output. These two outputs are combined with the input of LPF amplifier IC12: A. The high tone noise that is generated in IF amplifier is decreased by LPF amplifier.

The output of IC12: A is attenuated in R309 and R310 to get the same level with IC20, and also to decrease the noise. IC20 is the AF power amplifier which can get the output of 2W or more (THD 10%) at 8 Ω load. The ripple filter consists of Q51 and C260.

k. AGC

The AGC voltage is supplied one stage to first IF amplifier and three stages to second IF amplifier. These IF amplifiers consist of 3SK131. AGC voltage is applied to the Gate2. The IF amplifiers are designed that the gain is changed linearly corresponding to the AGC voltage.

D53 and D54 are the rectifier, and Q26 is DC amplifier. D50, the anode is set to about 2V in R176, D110, D111 and R177. Usually AGC voltage is applied 2.4V. The strong signal rectifies D53 and D54 resulting in DC voltage. Q26 decreases the AGC voltage.

When AGC-FAST is selected in SSB/CW mode, C205 and C206 are connected between 5V and AGC line in parallel. The attack time of AGC is determined in R167 and C206, then the release time is determined in R168 and C206. The characteristics are "fast attack" and "slow release". In case of AGC-SLOW, the analogue switch IC6 is turned ON, then R175 and C287 are connected in parallel. The release time is lengthened because of C287. In case of AM, C206 is connected in parallel, then the attack time is delayed, which is the average type. D110 and D111 is the thermal compensation of D50.

In receiving AM, AGC is the average type not to follow the modulation.

i. S Meter, Squelch

The output of Pin1 and RF meter output are combined in the diode, then it is sent to the front CPU to display the meter. The output signal of Pin1 is led to Pin6 of IC14:A. The voltage of Pin5 is determined by the squelch VR of front unit. Comparing with this voltage, the squelch is opened or closed.

While the check operation the CPU output decreases the voltage of squelch VR in front side to open the squelch forcibly. The squelch output controls IC13, at the same time it is provided to the front unit to light RX LED and led to CPU unit.

m. Noise Blanker Circuit

This circuit eliminates the pulse noise of a car, etc. Because the noise emitting time is short, in this duration the operation of receiver is stopped to prevent the unit from emitting a noise. The pulse noise is delayed when it is passed through the narrow band filter, and the emitting time becomes longer. It makes difficult to eliminate the noise, so it is necessary to eliminate the noise in the earlier stage. A part of the second mixer output, whose band width is limited, is amplified in Q20, Q19, Q18, and Q16. The signal is detected in D33 and D34, and the AGC voltage is applied to Q19, Q18 and Q16.

The charge time constant of this AGC is determined by R82 and C128, and also the discharge constant is determined by R81+R82, C128. The voltage of AGC does not rise suddenly because of the charge constant, so that this voltage is not applied to almost all the short signals such as pulse noise, but is applied to the continuous signals such as receiving signal and amplifier gain is decreased. While emitting the pulse noise, the AGC voltage does not follow the pulse noise, so the detected voltage is high, then Q15 is turned ON in that time.

On the contrary, as for the continuous signal, the detected voltage of D33 and D34 is fixed by AGC, so Q15 is turned OFF because of the emitter bias of R85 and R84.

Namely Q15 is turned ON only the time of the pulse noise, then Q21 is turned OFF. The source of IF amplifier of Q22 is biased through R98 and R102 so that the gain is decreased and the signal is blanked. When the emitter of Q15 is biased to high, the Noise Blanker is turned OFF.

2. Transmitter System

1) Main Unit

a. Microphone Amplifier

The input signal from microphone is amplified by the low noise amplifier Q56 through the mic gain VR1. It is possible to bias (8V) the microphone terminal with R388 for the microphone which needs the power supply. (solder bridge) In SSB/AM mode, The gain of IC21 (approx. 15dB) is determined by R329 and R328.

In FM mode, R330 is connected to R320 in parallel by Q55, then the gain is increased approximately 34dB. Also the cut off frequency is risen, and the signal is pre-emphasized and operated as a limiter.

In the SSB/AM mode, C345 and R384 are connected to the feedback circuit by Q63 when the speech compressor is turned ON. The gain is increased about 15dB, then IC21:B is operated as the limiter.

When the speech compressor is ON, the low frequency is cut by C345.

In FM mode, the gain is risen enough, so the speech compressor has no effect. The output of Pin1 of IC21: B is attenuated in R326 and R325. The subaudible tone from PLL unit is applied through R325. (When the Tone is ON.)

IC21: A is LPF amplifier that is the Splitter filter in FM mode, and it is operated for speech compressor.

This signal is output to PLL unit as the FM modulation, and output to the balanced modulation of IC2.

The output to IC2 is muted by Q54 in CW/FM mode.

b. Balanced Mixer

IC2 is the balanced mixer, and the carrier is suppressed in SSB mode. To get more ratio of carrier suppression, the balance adjustment of VR3 and VR4 are applied.

The carrier is necessary in CW/FM/AM mode, so the input of Pin1 is made unbalanced by applying the DC voltage to obtain the carrier.

By applying the DC in AM/FM mode, or by keying in CW mode, the balance is broken to obtain the carrier wave. VR11 is used for the adjustment of carrier level. In the AM mode, the DC and modulation is added simultaneously. In SSB mode, the modulation is added by R317. In AM mode, D93 is DC-biased and turned ON. Then the attenuator consisting of R317 and R393 limits the modulation.

c. IF Filter

After the output of IC2 increases the impedance in C177 and L77, it is passed through D49 and led into band limit IF filter. D52 is isolated highly by connecting to the output in parallel at receiving. In SSB mode, the output is DSB signal. (Double Side Band)

The filter is switched by the selection of above-mentioned diode switch. The signal is passed through the following filter in each mode.

| | | | |
|--------|----------------|-------------|--------------|
| SSB | FL3(CFJ455K5) | 2.4kHz/-6dB | 4.5kHz/-60dB |
| CW | FL2 (CFJ455K8) | 1.0kHz/-6dB | 3.0kHz/-60dB |
| FM, AM | FL4 (CFW455G) | 9kHz/-6dB | 20kHz/-50dB |

SSB is obtained by eliminating one of side bands of DSB through the filter.

d. IF Amplifier, The Second Mixer

After passing through the filter, the signal is led to D37, Q7, and D6, and passed through the second mixer in the opposite direction of the receiving, then the signal of 71.75MHz is obtained. Q6 operates the CW keying.

The voltage of ALC is added to the second gate of Q7.

The local oscillating signal of 71.295MHz and unwanted signal are eliminated in FL1: A and FL5. The signal is amplified in Q5, passed through FL5, then led to the balanced mixer of Q3 and Q4.

e. The First Transmitting Mixer

This mixer is the balanced type, and the unwanted signals (IF and local oscillating signal) are decreased. The best operation is selected by biasing the second gate. To decrease the spurious, the signal is balanced in VR1.

f. Power Amplifier

Passing through the mixer, the transmitting signal which has the desired transmitting frequency is passed after switching the LPF for HF band or BPF for 50MHz band. The unwanted signal and especially the leak of local oscillating signal is decreased as less as possible.

The signal is amplified up to 0-3dBm in Q1. The notch filter consists of C1, C2 and L1. It is tuned to approximately 44MHz while using 50MHz band to decrease the spurious signal. Then the signal is supplied to PA unit.

2) PA Unit

a. Power Amplifier

The signal input to PA unit is amplified up to approximately 100mW. The idling current of Q601 flows about 100mA during transmitting as A-class amplifier. The frequency characteristics are compensated by feedback, besides connecting the capacitor to emitter resistor in parallel.

The signal is amplified up to 10W in Q602 and Q603.

PA amplifier is the wide band range from 1.8MHz to 50MHz

The idling current flows 100mA (adjusted in VR601), and the amplifier is the push-pull type.

D601 is connected to Q602 and Q603 thermally, and the idling current is compensated for temperature. This output is switched at RL601 in 50MHz, then supplied to filter unit.

b. Final Stage Power Amplifier

In the final stage amplifier circuit consisting of Q604 and Q605 (2SC2904), the idling current of about 300mA is flowing. The base bias is made by Q606. D604 and D605 are connected to Q604, Q605 and Q606 thermally, and the idling current is compensated for temperature.

The feedback circuit, consisting of R621, R622, R623, C633, R627, R628 and C637, makes the gain flat in the wide range of 1.8MHz-30MHz.

The 100W output is led to filter unit.

The collector current of Q606 and Q607 is detected by using FB606 and L611.

Then led to the main unit.

c. Fan Control

The heat of Q606 and Q607 is detected by the thermistor TH601, and the fan is controlled. While transmitting, the resistance value is decreased by the rising of the temperature, then the voltage of inverting input terminal of IC601A/B is decreased. Non-inverting input is applied with the voltage corresponding to the temperature. When the temperature goes up to about 50°C or more and the compared voltage becomes lower than the inverting input voltage, Q607 is turned ON by the output voltage of comparator, IC601: A. Then the fan starts turning at a low speed by the value of series resistor (R639).

When the temperature rises more and the voltage becomes much lower than the compared voltage IC601: B, Q608 is turned ON. Then R639 is turned OFF and the fan turns at a high speed according to the value of series resistor of R640 to decrease the compared voltage of IC601: A.

When the temperature goes up to about 100°C and the voltage is decreased further lower, IC601: A supplies again, then R639 and R640 are connected in parallel to turn the fan at a higher speed. Although ordinary PDWN is pulled up to 14V by R637, the power output is set to LOW because both cathode terminals of D608 become LOW when the fan turns at a high speed. Then the signal is sent to the main unit as the control signal for power down at high temperature.

As the compared voltage of IC601: B is decreased in D611 while receiving, IC601: B does not work if the temperature does not go higher than it while transmitting. The temperature, at which the fan turns at a middle speed or more, is higher than it while transmitting. At high temperature, fan's turning speed comes down while receiving.

d. Protection Circuit

For the protection of the final power amplifier, the followings are equipped:

SWR detection

Protection against over current

Power down circuit for the temperature detection

e. CW Keying Circuit

As the base voltage of main unit Q49 goes down to LOW by CW keying, the voltage is supplied to collector. This output controls all of the circuit operation by CW keying.

The collector output of Q49 is passed through D95, VR11 and D93, and the balance is broken by applying DC voltage to the balanced mixer to generate the carrier. VR11 determines the CW waveform of rise and fall by adjusting the carrier level in R285 and C248.

At the same time Q48 is turned ON to turn OFF Q6 for keying isolation. C244 makes the OFF time of Q6 longer not to influence the keying waveform.

The voltage is applied to IC17: B Pin5 in D95, and the output of Pin7 turns Q46 ON to set PTT line to LOW in D73, then the unit enters the transmitting mode. The capacitor (C246, C247) is connected between Pin5 of IC17: B and the ground.

The holding time of transmitting is determined according to the discharge time constant. BK1, BK2, and BK3 are the voltages for the setting of 3-bit break-in time constant. 8 stages voltage is obtained by the combination of the resistors R269, R270 and R271.

In the Full Break-in mode, all of BK1, BK2 and BK3 are set to LOW, in the Semi Break-in mode, one of BK1, BK2, or BK3 is applied the voltage.

When all of the breakers are applied the voltage, it is used as the shortest time constant.

When in the full break-in mode, all of the voltages of BK1, BK2 and BK3 are low level, and Q47 is turned OFF. Therefore only C246 is the very short discharge constant, it is the full break-in mode with short transmitting time. One of BK1, BK2 and BK3 is supplied the voltage, and Q47 is turned OFF, then connected to C247 and C246 in parallel. The discharge time constant is longer, and it is the semi break-in time constant.

There are 7 stages of the voltage in the semi break-in mode according to the output voltage of BK1, BK2 or BK3. This is applied to the compared voltage of IC17: B, then the discharge time constant is changed. Namely when the voltage is applied to all of BK1, BK2 and BK3, the time constant is the shortest.

When the break-in mode is set to AUTO, BK1 only is supplied, and the compared voltage of IC17: B is controlled by the output voltage of IC17: B.

In the AUTO mode the keying output is emitted by one-shot multivibrator consisting of IC18A and B whenever the key is pressed. Therefore the average value of the output voltage of IC18: A is in proportion to the average speed of keying. To obtain the average voltage in R281, C245, etc., integrate the voltage. Then this output is D/C amplified in IC17: A, and provided as the compared voltage of keying. D97 is used for OFF in the AUTO mode. When the AUTO mode is in the LOW level, the voltage charged in C245 is short, then the operation in AUTO mode is stopped.

D107 and R360 are used to get up speed rising when the keying is started. D92 and R280 determine the discharge time constant. While receiving the time constant is prolonged.

The selection of transmission/reception follows the keying speed from 30 letters/minute to 200 letters/minute.
The transmitting mode is held between letters, and the unit returns to receiving mode between words.

f. Power Control, ALC Circuit

The forward wave voltage in proportion to the transmitting power obtained in filter unit is inverting-input to IC8: A, and inverting-amplified. Non-inverting input is applied the voltage, and the output voltage is shifted by the non-inverting input voltage.

ALC line is applied the voltage of about 2.7V beforehand, and the ALC voltage is supplied to the second gate of the amplifier.
When the forward wave voltage is detected, the output voltage of IC8: A is decreased. If it is about 3V or below, the ALC line voltage is decreased by D63. VR7 is used for the adjustment of 100W. When the unit is switched to 50W by S1, Q27 is turned ON and VR5 is connected in parallel to decrease the voltage, then the unit is adjusted to 50W.

In AM mode, R195 is connected in parallel to decrease the voltage up to about 40W.

In the low power mode, R191 is connected in parallel by setting to LOW, and the voltage is decreased.

Q29 and VR8 are used for the adjustment to get the required power of about 10W in the matching operation of external automatic tuner. (The required power depends on the tuner.)

When the value of SWR is high, the reflected wave voltage turns Q28 ON to decrease the power. The unit is operated when the SWR is about 3 or more.

Compared with the forward wave detection power in HF band of 100 W, the forward wave voltage in 50MHz band of 10W is set to higher a little.

In SSB mode, "fast attack" is obtained by D63, and the release time of "slow attack" is obtained by C222 and R130. In AM mode C221 is connected in parallel by Q30, and the unit is operated in near the average value.

g. Over Current Protection Circuit

The final stage collector current which is detected in PA unit is differential-amplified in IC8: B. The output voltage is decreased according to the increase of the current. Then ALC line is fallen by D63 and the output power is decreased. The operational point is decided in VR6.

h. RF Meter Circuit, ALC Indication

The forward wave is amplified in IC9: A to obtain the meter output voltage.

The peak is held in D70, R223 and C223, and the meter swings smoothly.

Meter output voltage and S meter output voltage are switched in D71 and D86 automatically.

ALC voltage is inverting voltage amplified in IC9: B.

This output is applied to the base of Q31, then sent to front unit for the detection of transmission/reception and lighting the transmitting LED. The LED brightness is changed according to the ALC voltage.

i. Sidetone Circuit

The comparison frequency of the second local oscillator in PLL unit (65kHz~85kHz) is divided by 10 in IC714, then led to the main unit. In addition the frequency is divided by 10 in IC19 of the main unit to obtain the sidetone of 650Hz~850Hz. The comparison frequency of the second local oscillator is changed according to the CW offset setting. To relate with the sidetone, comparison frequency is about 100 times the CW offset. IC19 Pin2 is controlled by Q65 at CW keying. The time constant is delayed not to give the influence to waveform of the sidetone.

The following active filter Q50 makes the square wave to sine wave to obtain better sound. The rise/fall wave of the sidetone is generated by keying controlling the bias of base and emitter.

j. Tune Circuit

When using the external automatic antenna tuner, this circuit controls the matching start signal and the operation of the unit during tuner matching.

When the tune operation is started, the Tune voltage is supplied to operate the one-shot multivibrator in IC18: C, D. The voltage of about 8 V is applied to outside for a fixed time through Q62 as the start signal. In the other hand, Q53 supplies the tune voltage of sink output, it becomes LOW while tuning. (For the transceiver made by ICOM, KENWOOD).

As soon as the tuner receives the tune start signal, the tuner provides it as the tuning signal. (TKEY terminal)

CPU observes the TKEY terminal, and keeps the unit in TUNE mode indicating that the tuner is operating while it is in the LOW level. CPU releases the TUNE mode when TKEY terminal is in LOW for 20 seconds or more. In the Tune mode the unit transmits a signal in AM mode, the microphone output is muted, then the carrier is kept on outputting about 10W (adjustable).

k. Regulated Power Supply Circuit

IC11 is the 8V Regulated Power Supply Circuit. T8V that is necessary for transmitting is made in Q33, and R8V that is necessary for receiving is made in Q35. IC10, Q32 and Q34 control the transmission/reception. When PTT line is connected to the ground through the microphone terminal or CW keying output (Q46), H level is supplied from IC10: A and it is led to CPU of front unit to detect the transmission/reception switching.

IC10: C delays the rise of receiving in R227, C224 and D62 and controls in Q32 and Q33.

While receiving, the current is flowing from 13.8V through R230 and D75, then the base voltage Q33 is approximately 8.7V, and the emitter output is just 8V.

While transmitting, the base voltage of Q33 is 0V because Q32 is turned ON, and R8V is not provided.

While transmitting R8V is short by D77, and it makes the charge voltage such as electrolytic capacitor discharge momentarily not to remain R8V.

As for Q35, as same as R8V the current is flowing from 13.8V through R230 and D75, then the base voltage of Q35 is approximately 8.7V and the emitter output is just 8V while receiving. While transmitting, the base voltage is 0V because Q34 is turned ON, and T8V is not provided.

While transmitting T8V is short by D77, and it makes the charge voltage such as electrolytic capacitor discharge momentarily not to remain T8V.

After delayed the transmitting rise time in IC10:B, the signal is inverted in IC18:D, then T8V is controlled in Q34.

When Pin8 IC10:A is supplied the voltage, the unit enters PTT lock mode without changing the output of Pin10 even if the PTT line is connected to the ground.

i. Mode Voltage, Function Control (BPF/ LPF Selector)

The enable terminals of IC15 and IC16 select the signal ENX or ENY by using IC24 and Q62.

The data from CPU (DAT2) consists of 16-bit serial data, two 8-bit shift resistors are connected in series.

IC22 and IC23 control the band selection, ON/OFF of preamplifier, ATT, power, TX mute function, etc. They are operated in Low level.

IC15 controls the Mode voltage, and IC16 controls filter, AGC, Break-in, PTT lock, and Noise blanker. The voltage of every mode (USB, LSB, AM, CW, CWU, CWL, FM, TUNE) turns ON Q41, Q42, Q43 and Q44 to supply 8V.

m. LPF

HF supplied from PA final stage eliminates harmonics through LPF of filter unit. Input/Output of this filter is switched by the relay, and Input/Output of unused filter is short at the relay contact.

LPF control is used the BPF control voltage of the main unit.

Every LPF consists of Chebyshev filter, and double or more harmonics are attenuated about 40dB or more.

| | | | |
|----|----------------|----------|----------------|
| L0 | ~ 2.5MHz | BB0, BB1 | 1.8MHz band |
| L1 | 2.5MHz~4.0MHz | BB2 | 3.5MHz band |
| L2 | 4.0MHz~7.5MHz | BB3 | 7MHz band |
| L3 | 7.5MHz~14.5MHz | BB4, BB5 | 10, 14MHz band |

| | | | |
|----|-----------------|-----|----------------|
| L4 | 14.5MHz~21.5MHz | BB6 | 18, 21MHz band |
| L5 | 21.5MHz~30.0MHz | BB7 | 24, 28MHz band |

The transmitting signal, whose spurious is eliminated by passing through LPF, is led to power detection circuit and supplied to HF antenna terminal passing through the selection relay.

n. 50MHz Transmission/Reception Selector

50MHz band performs the transmission/reception selection by the diode of D508 and D509. It is supplied to antenna terminal of 50MHz through LPF.

Both D508 and D509 are turned OFF while receiving, the receiving signal from the antenna terminal is passed through LPF (L520, L521, C570~C574, L518, C565) and HPF (L516, C562~C564), then amplified in Q503.

Q501 and Q502 are turned ON while transmitting, and D508 and D509 are turned ON then the transmitting output is passed.

The antenna input of receiving circuit is short because D509 is turned ON. Also as the parallel resonant circuit consists of L518, D508, etc., the transmitting signal does not influenced.

o. Power Detection Circuit

The each power detection circuit is equipped with HF band and 50MHz band.

The harmonics are sometimes generated depending on the using diode in the detection circuit. LPF makes the standing wave, so the circuit is located before the LPF in 50MHz band whose spurious specification is severe, and after LPF in HF band.

From now on the operation in HF band is shown, and in 50MHz band the operation is the same.

L534 is 10-turn bifilar of toroidal core (twisted pairs of AWG). Therefore the both sides are 20 turns with center tap.

Piercing the center hole of the core means the same with 1 turn. So the transformer is 1:20.

Therefore R508 is applied the voltage (forward wave voltage) according to the output voltage, and R509 is applied the voltage (reflected wave) according to the reflected power. The output power and reflection detect the power to control the power in the main unit.

p. Dial Rotating Detection

The pulse generated by the rotation of the main dial is eliminated the chattering in IC1001: A, B. IC1001: A and B are the Schmitt triggers by the feedback from the output.

The rise and fall of each output is differentiated in IC1002: A, C, so the pulse number is doubled. Then it is 4 times the pulse number because of synthesizing in IC1001: C.

To find the rotation direction, it is detected in IC1002: B and IC1003 and fed to CPU. As S1002 generates 50 pulse at 1 rotation, what is input to CPU is 200 pulse/rotation, and 5kHz/rotation in 25Hz step.

The main dial rotates very fast and generates so many pulses. The pulse is divided in IC1004, and the pulse number is stored as the 6-bit binary digit by each dividing output. At a high speed rotation the frequency is forwarded by counting the pulse number stored in IC1004, then the process is finished, the pulse number

it is connected to the outputs DB0~DB6 or not, then the destination is determined. The currents in Y0 and Y1, and between DB-DB6 are scanned to detect which switch on the front panel is pressed. The both sides of RIT VR are applied 5V, and the location of VR is detected by the voltage of A/D input terminal. In the Receiving frequency monitor Q1019 is turned ON by the MONI output from CPU, the squelch setting voltage programmed by turning the knob on the front panel is decreased forcibly. Then the squelch is open forcibly without any relation with VR position. The output from the main unit (RTXC) lights the LED according to the change of the ALC voltage. The output cannot be supplied as it is, so it is changed to ON/OFF signal in Q1009. Q1011 is the squelch output from the main unit, and it lights RX LED.

4) PLL Unit Summary

The followings are performed in PLL unit:
 The generation of carrier signal
 The generation of the first and second local oscillating signal
 The generation of sidetone CTCSS
 Adding the FM modulation
 Making the power supply of 5V

Details

- (1) There are 3 kinds of power supply as follows:
 The voltage of 13V passed through the switch
 The voltage of 8V made in the MAIN unit
 The voltage of 5V made in the PLL unit
 Power supply depending on the MODE comes from the main unit.
- (2) First the reference signal of 30MHz is generated in X701 and Q701 according to the constant of TC701 and L702.
- (3) Secondly the signal of 9.420MHz +/- 1.5kHz is generated by the voltage of D706 in X702, Q721 and Q722.
- (4) Thirdly the signal of 9.875MHz +/- 1.5kHz is generated according to the constant of TC702-TC704, C807, C809, C810, C811 and C812 in Q725 and Q724.
- (5) The frequency of 9.875MHz is changed according to the MODE, transmission/reception.

[Transmission/Reception of LSB]
 CN701 Pin21 (LSB) is applied the voltage of 8V and the signal is passed through D714, then results in the frequency of 9.8735MHz according to the constant of TC702 and C812. Also (LSB) 8V is passed through D718, and the voltage is applied to Q723 to emit the carrier signal.

[Transmission/Reception of USB]
 CN701 Pin26 (USB) is applied the voltage of 8V and the signal is passed through D711, then results in the frequency of 9.8765MHz according to the constant of TC704 and C807. Also (LSB) 8V is passed through D717, and the voltage is

stored in IC1004 is reset by the output from CPU. The dial rotation pulse is charged in D1016, R1022 and C1010, and the average voltage according to the speed is obtained. When the dial rotation speed is fast, the frequency step per pulse is four times that at normal speed.

3) Front Unit a. Power Switch

When SW1001 is pressed, Q1001 is turned ON, then the contact of RL602 in PA unit is turned ON to supply the voltage of 13.8V to the front unit. Once the CPU starts operation, the output from PCONT of CPU turns Q1006 ON to hold ON the relay of RL602. When SW1001 is kept pressing while the power is ON, the signal is detected in PSDET, and the Q1006 is turned OFF to cut OFF the power supply.

b. Power Supply

IC1007 is the regulated power supply of 5V which has the output for CPU reset. IC1006 is the regulated power supply of 8V which generates the required voltage for IF shift and volume control. When the power supply is cut OFF, the output of regulated power supply of 8V is increased first, and it is detected in D1018 and IC1002:D, then sent to CPU. In CPU the data is stored in the EEPROM of IC1005 before the output of regulated power supply of 5V is decreased and the unit is reset. D1019 and C1002 are used to hold the output voltage of 5V by keeping the input voltage of 5V regulated power supply as long as possible.

c. Dimmer Circuit

The regulated power supply of about 10.5V consists of Q1003, Q1004 and Q1005. Q1003 supplies about 10.5V when the DIMM output from CPU is 5V. In CPU unit, DIMM is the pulse output, and it switches ON/OFF of the output of about 10.5V. At full lighting the output from CPU is fixed to 5V. In "LP4" mode the duty is 60% and in "LP3" mode the duty is 60%. In this way the brightness is changed by the duty in Q1003. Q1003 is supplied the current by turning ON/OFF. At the maximum the brightness is the lightest, and the duty is decreased according to the dimmer, then the power dissipation is decreased. The dimmer can be operated by the small transistor. The maximum brightness is 10.5V, and it is set to under the regulation voltage (6.3V x 2) to prolong the life of the lamp. The rush current when the lamp is turned ON is in pulse mode to decrease the load on the lamp.

d. LCD

The indication such as frequency that is required the speed is performed by the CPU itself, and the other indications are performed by the LCD driver of IC1009. The LCD indication employs the frame frequency of about 128Hz, 1/2 DUTY and 1/2 bias.

e. Others

X1001 is the ceramic resonator of 8MHz selected not to enter the amateur band in the harmonics relations. When the power is ON, the voltage is supplied from Y2 and Y3, to detect whether

applied to Q723 to emit the carrier signal.

[Reception of AM/FM/TUNE]

CN701 Pin20 (FM) or CN701 Pin22 (AT) is added the voltage of 8V and in the FM mode the signal is passed through D708, then results in the frequency of 9.875MHz according to the constant of TC703 and C811. Q723 has no voltage, and carrier signal is never emitted.

[Transmission of AM/TUNE]

CN701 Pin22(AT) is applied 8V and results in the frequency of 9.875MHz according to the constant of TC703, C811.
The voltage of 8V from CN701 Pin23 (T8V) is passed through D718 to add the voltage to Q723, then the carrier signal is emitted.

[Transmission of FM]

CN701 Pin20 (FM) and CN701 Pin23 (T8V) are added the voltage of 8V, the Q729 and Q733 are turned ON. 8V voltage of CN701 Pin20 (FM) is passed through D708, Q733 and D714, then results in the frequency of 9.8735MHz according to the constant of TC702 and C812. Here FM is passed through AT, and R814 to turn ON C811, however, as Q733 is also turned ON, Q727 is turned ON and C811 is shorted.

The voltage of 8V from CN701 Pin23 (T8V) is passed through D718, and led to Q723 to emit the carrier signal.

The voltage of 8V from Q733 turns ON the analogue switch of IC715.

The modulation signal is passed through R798, IC715, R796 and C801, and it is FM-modulated in VCO2.

[The Transmission of CWU/CWL]

CN701 Pin24 (CWU) or CN701 Pin25 (CWL) is supplied the voltage of 8V, then it is passed through D716, D732, Q716 (because Q729 is ON) and R814, then results in the frequency of 9.875MHz according to the constant of TC703 and C811.

Although here CWU tries to turn C810 ON or CWL tries to turn C809 ON, it can not be done through D715 because Q729 is also turned ON.

[The Reception of CWU]

CN701 Pin24 (CWU) is supplied the voltage of 8V, passed through D712, then resulting in the frequency of 9.8758MHz of frequency according to the constant of TC703 and C810. Also the voltage of 8V from CN701 Pin24 (CWL) is passed through D716 and D717 to the Q723, then the carrier signal is emitted.

[The Reception of CWL]

CN701 Pin25 (CWU) is supplied the voltage of 8V, passed through D712, then resulting in the frequency of 9.8742MHz of frequency according to the constant of TC703 and C809. Also the voltage of 8V from CN701 Pin25 (CWL) is passed through D716 and D717 to the Q723, then the carrier signal is emitted.

(6) The frequency of 9.42MHz can be changed only while receiving by the IF shift volume on the front panel.

The voltage supplied to CN701 Pin14 (SHV) is changed by the IF shift volume, and

the capacitance of D706 is also changed, then 9.42MHz is changed. The center frequency of the IF shift volume is determined by VR702.

While transmitting Q715 is turned ON by T8V to eliminate the influence by SHV and VR701, then the frequency is decided only by VR701.

In USB CN701 Pin26 (USB) and CN701 Pin15 (TONS) are supplied the voltage of 8V. As in UT mode TONS becomes the sink, Q735 is turned OFF and USB is supplied 0V, then Q730 is turned ON and a terminal of R767 is connected to the ground to decrease the voltage of D706, beside the frequency of 9.42MHz is decreased about 300Hz less while receiving and about 100Hz less while transmitting than the value in USB mode.

In the same manner, in LSB mode the voltages of CN701 Pin21 (LSB) and CN701 Pin15 (TONS) are 8V. As in LT mode TONS becomes the sink, Q735 is turned OFF and D729 is supplied the voltage by R767. Then voltage of D706 is increased. Beside the frequency of 9.42Hz is increased about 300Hz more while receiving and about 100Hz more while transmitting than the value in LSB mode.

(7) The Emission of 455kHz Carrier Signal

The above-mentioned 9.875MHz signal is input to Mixer IC712 Pin6, and 9.42MHz signal is input to IC712 Pin8. The difference frequency of 455kHz is output from IC712 Pin3 and sent to the MAIN unit from J701 after amplified in Q723. The Output level is approximately -5dB.

(Frequency Relations depending on the Mode)

| | | |
|----------------------|---------------------------|-----------------|
| USB(TX RX) | 9.8765MHz - 9.42MHz (**) | = 456.5kHz (**) |
| LSB(TX RX) | 9.8735MHz - 9.42MHz (**) | = 453.5kHz (**) |
| FM(TX) | 9.8750MHz - 9.42MHz (**) | = 455.0kHz (*) |
| CWU CWL AM TUNE (TX) | 9.8750MHz - 9.42MHz | = 455.0kHz (*) |
| CWU(RX) | 9.8758MHz - 9.42MHz (*) | = 453.5kHz (*) |
| CWL(RX) | 9.8742MHz - 9.42MHz (*) | = 453.5kHz (*) |
| UT(RX) | 9.8765MHz - 9.4197MHz (*) | = 456.8kHz (*) |
| LT(RX) | 9.8735MHz - 9.4203MHz (*) | = 453.2kHz (*) |
| UT(TX) | 9.8765MHz - 9.4199MHz | = 456.6kHz |
| LT(TX) | 9.8735MHz - 9.4201MHz | = 453.4kHz |

AM FM (RX) does not output

(**): While receiving IF Shift Operation (+/- 1.5kHz)

(*): IF Shift Operation (+/- 1.5kHz)

(8) The Second Local Oscillating Signal

In VCO2 unit, after the frequency of 71.295MHz is oscillated in Q941 and amplified in Q949, Q944 and Q945, the signal of approximately 3dB is supplied to MAIN unit through J702 as the second local oscillating signal.

The signal for PLL loop is supplied from Q942 to PLL unit.

The signal of 71.295MHz is fed to Mixer IC711 Pin7 and the signal of 9.42MHz is fed to Pin3, so that the difference frequency of 61.875MHz output from Pin6 only is picked up by Q711, L712 and L711, and fed to PLL IC707, then locked at 61.875MHz.

Therefore, by rotating the IF shift volume, 9.42MHz, and also 71.295MHz are changed.

The frequency of 30MHz is fed to IC707 through Pin1, and it is divided to get the following frequency as the reference frequency, and also the frequency of

61.875MHz is divided to get the reference frequency, then these two frequencies are compared.

The reference frequency changes according to the CW sidetone frequency.

When the sidetone frequency is 650Hz, the reference frequency is 64.655kHz.
 When the sidetone frequency is 750Hz, the reference frequency is 75.000kHz.
 When the sidetone frequency is 850Hz, the reference frequency is 85.227kHz.

(9) The First Local Oscillating Signal

In the HF mode, the frequency oscillated in VCO3 is amplified in Q710 and Q714, and passed through the switching diode D725 and D726, then band-pass filter and RL701. The signal of approximately 3dB is led to the MAIN unit from J703.

3 VCO's are built in VCO3, and it is oscillated under following frequency conditions:

- 150kHz~under 10.5MHz:
- The VCO is oscillated within 71.90~82.25MHz by D961, TC961 and Q961.
- 10.5kHz~under 21.5MHz:
- The VCO is oscillated within 82.25~93.25MHz by D963, TC962 and Q963.
- 21.5kHz~under 30.0MHz:
- The VCO is oscillated within 93.25~101.75MHz by D965, TC963 and Q965.

These 3 VCO's are selected by the serial data of DAT2, CK2 and ENB from CPU. 8 signals from IC716 are reduced up to 3 signals, then VCO is selected by the switches of VCO3, Q962, Q964 and Q966.

When the frequency is 50MHz, in VCO3 the oscillated frequency within 76.75~80.75MHz by D961, TC961 and Q961 are synthesized with the frequency of 45MHz by the DBM (Double Balanced Mixer) in L729, L730 and D730, then the frequency within 121.75~125.75MHz is generated. It is passed through RL701 by the band-pass filters of L732, L733, L734 and L735 and Amplifier of Q731 and Q716, then the signal of approximately 3dB is output to J703.

The frequency of 45MHz is generated as follows: The reference signal of 30MHz is amplified in Q719 and led to IC701 Pin3, then one half of the signal is supplied from Pin5. 3 times frequency of the signal only is passed through the filter L720, L721 and L722, and fed to the center tap of L729, then led to DBM.

The frequency loop of VCO3 is locked as follows: VCO3 oscillating frequency is passed through Q712 and input to the mixer IC709 Pin6, also the signal of 70.65~70.75MHz (25Hz step) is led to IC709 Pin8. Then the signal of 1.1~31.1MHz is passed through the amplifier Q713 and led to PLL IC702 Pin8 as the difference signal.

This frequency is locked by the following procedure.
 1.1MHz is added to the digit number of 100kHz or more of the operation frequency, and divided to obtain 100kHz. Then the frequency is locked after comparing with the reference frequency 100kHz. See the examples as shown below.

Operation Frequency: 1MHz
 → PLL The frequency fed to IC702 Pin8: 2.1MHz

Operation Frequency: 29MHz

→ PLL The frequency fed to IC702 Pin8: 30.1MHz

Therefore, as the reference frequency of IC702, the reference frequency of 30MHz is divided up to 100kHz inside the unit.
 In IC702, the operation frequency of 100kHz or more only is controlled.

In 50MHz band, CN701 Pin1 (50M) is sink, Q732 collector is supplied the voltage of 8V. The power supply of Q731, Q716 is turned ON, Q709 and D730 are turned ON, Q709, RL701, D724 and D724 are turned ON, then D730 is ON and Q724 is OFF.

The deviation while transmitting is 5kHz/DEV, and 2.5kHz/DEV while HF/FM transmitting.
 In the HF mode, Q717 is ON, and D725 and D726 are turned ON, then D735 is ON. IC710 Pin4 is supplied about 0.7V so that the operation of IC710 is stopped.

When the unlock signal is emitted from every Pin7 in PLL IC IC702, IC703 and IC707, the voltage of 8V is supplied from the collector in Q728, and Q718 is turned ON so that Q714 is turned OFF, then the level of J703 is decreased about 30dB or more.

(10) 25Hz Step 70.65~70.75MHz
 In VCO1 Unit, to generate 25Hz step of the first local oscillating, Q931 is used to oscillate the frequency of 155MHz~175MHz, the signal is passed through Q932 and divided by 20 in IC704, and supplied through Q933. Then the signal is divided by 10 in IC705, and the frequency of 775~875kHz (25Hz step) is fed to the mixer IC701. Therefore, the operation frequency of 100kHz digit or below can be operated in 25Hz step.
 Also the frequency is input to PLL unit IC703 Pin8 through Q931 for the PLL loop. PLL IC divides the frequency of 155,000~174,995MHz to get 5kHz, and it is compared with the reference frequency of 5kHz to make the loop.

| indication of the operation frequency of 100kHz digit or below | Oscillating frequency |
|--|-----------------------|
| .0000(00) | 155.0000MHz |
| .5000(00) | 165.0000MHz |
| .9999(75) | 174.9950MHz |

*The number in () is the frequency of no indication.

The reference frequency of 30MHz is divided to get 5kHz (25Hz x 200), and used as the reference frequency in IC703. Because the signal of 9.875MHz is input to IC701 Pin8, the sum of the frequencies, 10.65~10.75MHz is supplied from IC703 Pin2, and passed through the ceramic filter of 10.7MHz, then led to IC706 Pin6.

As the double harmonics of reference frequency of 30MHz are generated in Q708, L710 and L709, and they are fed to IC706 Pin8. The sum of the frequency of 70.65~70.75MHz is supplied from IC703 Pin3, passed through the band-pass filter of L706, L707 and L708, and fed to IC709 Pin8. Then the signal is included in a part of the loop of the first local oscillating signal.

5) Terminal function of CPU

| No. | Use1 | Use2 | Use3 | Pin Name | Remarks | VO | Description | L | H |
|-----|------|-------|-------|-----------|---------------|----|---|----------------------|-----------------|
| 2 | | | A VSS | GND | | | | | |
| 3 | | | GND | | | | | | |
| 4 | | | X2 | XTAL_LOSC | | | | | |
| 5 | | | X1 | XTAL | | | | | |
| 6 | | | VSS | GND | | | | | |
| 7 | | | OSC1 | XTAL | | | | | |
| 8 | | | OSC2 | XTAL | | | | | |
| 9 | | | RES | RST | | | | | |
| 10 | | | MDO | SV7 | | | | | |
| 11 | P20 | IR04 | ADTRG | DCX | DIAL CLOCK | 1 | Main dial rotation detection and pulse number | Rise slope detection | |
| 12 | P21 | | U0 | PCONT | POWER ON | 0 | Power control output | Power OFF | Power ON |
| 13 | P22 | | | PSDET | POWER DET | 1 | Condition detection when power switch is turned ON. | During power OFF | During power ON |
| 14 | P23 | | | TKEY | TUNE KEY | 1 | Detection of working external antenna trigger | At work | Waking |
| 15 | P24 | | | UNLK | PULL UNLOCK | 1 | PULL unlock detection | Unhook | Lock |
| 16 | P25 | | | IMCK | EEPROM CK | 0 | Check for data transmission/reception to EEPROM | | |
| 17 | P26 | | | MDAT | EEPROM DATA | VO | Data Transmission/Reception to EEPROM | | |
| 18 | P27 | | | EXTIN | EXT IN | 1 | External EEPROM transmission coincidence | EEPROM | Acceptance |
| 19 | P30 | | SCM1 | CK1 | SERIAL CK | 0 | HPL, LPL, data transmission clock | | |
| 20 | P31 | | SI1 | DAT1 | SERIAL DATA | 0 | HPL, LPL, data transmission | | |
| 21 | P32 | | SO1 | ENH | HP/L ENABLE | 0 | HPL data transmission enable | | Enable |
| 22 | P33 | | SC2 | ENL | LP/L ENABLE | 0 | LPL data transmission enable | | Enable |
| 23 | P34 | | SI2 | CK2 | SERIAL CK | 0 | MODE, BPF, etc. transmission clock | | |
| 24 | P35 | | SO2 | DAT2 | SERIAL DATA | 0 | MODE, BPF, etc. data transmission | | |
| 25 | P36 | | STRB | ENA | SERIAL SELECT | 0 | MODE, BPF, etc. data enable selection | | Enable 1 |
| 26 | P37 | | CS | ENB | SERIAL SELECT | 0 | MODE, BPF, etc. data enable selection | | Enable 2 |
| 27 | | | VAS | GND | | | | | |
| 28 | | | V3 | | | | | | |
| 29 | | | V2 | | | | | | |
| 30 | | | V1 | | | | | | |
| 31 | | | VCC | | | | | | |
| 32 | PA3 | COM4 | | COM1 | | 0 | LCD COMMON | | |
| 33 | PA2 | COM3 | | COM4 | | 0 | LCD COMMON | | |
| 34 | PA1 | COM2 | | COM3 | | 0 | LCD COMMON | | |
| 35 | PA0 | COM1 | | COM2 | | 0 | LCD COMMON | | |
| 36 | P40 | SEG1 | WRP0 | DB0 | | 1 | SW, initial setting detection | | Detection |
| 37 | P51 | SEG2 | WRP1 | DB1 | | 1 | SW, initial setting detection | | Detection |
| 38 | P52 | SEG3 | WRP2 | DB2 | | 1 | SW, initial setting detection | | Detection |
| 39 | P53 | SEG4 | WRP3 | DB3 | | 1 | SW, initial setting detection | | Detection |
| 40 | P54 | SEG5 | WRP4 | DB4 | | 1 | SW, initial setting detection | | Detection |
| 41 | P55 | SEG6 | WRP5 | DB5 | | 1 | SW, initial setting detection | | Detection |
| 42 | P56 | SEG7 | WRP6 | DB6 | | 1 | SW, initial setting detection | | Detection |
| 43 | P57 | SEG8 | WRP7 | | | 0 | SW, initial setting detection | | Detection |
| 44 | P60 | SEG9 | | Y0 | | 0 | Panel SW for ON detection | | AI detecting |
| 45 | P61 | SEG10 | | Y1 | | 0 | Panel SW for ON detection | | AI detecting |
| 46 | P62 | SEG11 | | Y2 | | 0 | Output for initial condition setting detection | | |
| 47 | P63 | SEG12 | | Y3 | | 0 | Output for initial condition setting detection | | |
| 48 | P64 | SEG13 | | GND | | 0 | LCD driver enable | | |
| 49 | P65 | SEG14 | | LCDEN | | 0 | LCD driver enable | | |
| 50 | P66 | SEG15 | | LCKCK | | 0 | LCD driver clock | | |
| 51 | P67 | SEG16 | | LCDATA | | 0 | LCD driver data | | |


(11) CTCSS for only FM transmission
 In Tone unit, T type controls the frequency with the DIP Switch SW901 Pin3 - 8, then it is oscillated between 67~251Hz, amplified in Q901 and passed through CN704-1, then led to the MAIN unit from CN701 Pin16.
 In this circuit, ON operation is performed when TONS is the sink and IC901 Pin4 is 0V, and FM is supplied BV and tone unit power supply is ON.
 The tone level is controlled with the DIP switch SW901 Pin1 and Pin2 to adjust the level.

(12) FM TX deviation
 Default is $\pm 2.5\text{kHz}$ deviation on 29MHz and $\pm 5\text{kHz}$ deviation on 51MHz.
 a) Short-circuiting collector and emitter of Q734 will make both bands $\pm 2.5\text{kHz}$.
 b) Short-circuiting the base and emitter of Q734 (and collector and emitter open) will make both bands $\pm 5\text{kHz}$.
 Short-circuiting both (a) and (b) will result in the same effect as (a).

SEMICONDUCTOR DATA

1) S7116A (XA0052)

Tone Generator Block Diagram

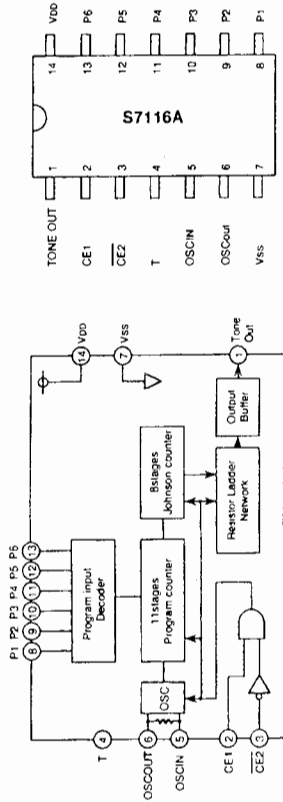


| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|-------------------|-----------------|---|-----|-----|-----|--------|
| Supply voltage | VDD | | 3.0 | - | 10 | V |
| Supply current | I _{DD} | VDD=5.0V, CE1=VDD, CE2=VSS, CG=C ₀ =10pF | - | 0.4 | 1.0 | mA |
| Stand by current | I _{DD} | VDD=5.0V, input: open, RL=50kΩ | - | 20 | 60 | μA |
| Tone output level | VOT | VDD=5.0V, RL=50kΩ | 240 | 340 | 440 | mV rms |

| Freq. | P1 | P2 | P3 | P4 | P5 | P6 | Freq. | P1 | P2 | P3 | P4 | P5 | P6 |
|-------|----|----|----|----|----|----|-------|----|----|----|----|----|----|
| 67.0 | 1 | 1 | 1 | 1 | 1 | 1 | 186.2 | 1 | 1 | 1 | 1 | 1 | 1 |
| 71.9 | 1 | 1 | 1 | 1 | 1 | 1 | 192.8 | 1 | 1 | 1 | 1 | 1 | 1 |
| 74.4 | 1 | 1 | 1 | 1 | 1 | 1 | 203.5 | 1 | 1 | 1 | 1 | 1 | 1 |
| 77.0 | 1 | 1 | 1 | 1 | 1 | 1 | 210.7 | 1 | 1 | 1 | 1 | 1 | 1 |
| 82.5 | 1 | 1 | 1 | 1 | 1 | 1 | 218.1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 85.4 | 1 | 1 | 1 | 1 | 1 | 1 | 225.7 | 1 | 1 | 1 | 1 | 1 | 1 |
| 88.5 | 1 | 1 | 1 | 1 | 1 | 1 | 233.6 | 1 | 1 | 1 | 1 | 1 | 1 |
| 91.5 | 1 | 1 | 1 | 1 | 1 | 1 | 241.8 | 1 | 1 | 1 | 1 | 1 | 1 |
| 94.8 | 1 | 1 | 1 | 1 | 1 | 1 | 250.3 | 1 | 1 | 1 | 1 | 1 | 1 |
| 97.4 | 1 | 1 | 1 | 1 | 1 | 1 | 560 | 1 | 1 | 1 | 1 | 1 | 1 |
| 100.0 | 1 | 1 | 1 | 1 | 1 | 1 | 600 | 1 | 1 | 1 | 1 | 1 | 1 |
| 102.5 | 1 | 1 | 1 | 1 | 1 | 1 | 700 | 1 | 1 | 1 | 1 | 1 | 1 |
| 107.2 | 1 | 1 | 1 | 1 | 1 | 1 | 800 | 1 | 1 | 1 | 1 | 1 | 1 |
| 110.9 | 1 | 1 | 1 | 1 | 1 | 1 | 900 | 1 | 1 | 1 | 1 | 1 | 1 |
| 114.8 | 1 | 1 | 1 | 1 | 1 | 1 | 1000 | 1 | 1 | 1 | 1 | 1 | 1 |
| 118.8 | 1 | 1 | 1 | 1 | 1 | 1 | 1600 | 1 | 1 | 1 | 1 | 1 | 1 |
| 123.0 | 1 | 1 | 1 | 1 | 1 | 1 | 1700 | 1 | 1 | 1 | 1 | 1 | 1 |
| 127.3 | 1 | 1 | 1 | 1 | 1 | 1 | 1750 | 1 | 1 | 1 | 1 | 1 | 1 |
| 131.8 | 1 | 1 | 1 | 1 | 1 | 1 | 1800 | 1 | 1 | 1 | 1 | 1 | 1 |
| 136.5 | 1 | 1 | 1 | 1 | 1 | 1 | 1300 | 1 | 1 | 1 | 1 | 1 | 1 |
| 141.3 | 1 | 1 | 1 | 1 | 1 | 1 | 2000 | 1 | 1 | 1 | 1 | 1 | 1 |
| 146.2 | 1 | 1 | 1 | 1 | 1 | 1 | 2200 | 1 | 1 | 1 | 1 | 1 | 1 |
| 151.4 | 1 | 1 | 1 | 1 | 1 | 1 | 2375 | 1 | 1 | 1 | 1 | 1 | 1 |
| 156.7 | 1 | 1 | 1 | 1 | 1 | 1 | 2550 | 1 | 1 | 1 | 1 | 1 | 1 |
| 162.2 | 1 | 1 | 1 | 1 | 1 | 1 | 2295 | 1 | 1 | 1 | 1 | 1 | 1 |
| 167.9 | 1 | 1 | 1 | 1 | 1 | 1 | 2125 | 1 | 1 | 1 | 1 | 1 | 1 |
| 173.8 | 1 | 1 | 1 | 1 | 1 | 1 | 1275 | 1 | 1 | 1 | 1 | 1 | 1 |
| 179.9 | 1 | 1 | 1 | 1 | 1 | 1 | 1445 | 1 | 1 | 1 | 1 | 1 | 1 |


| No. | Use1 | Use2 | Use3 | Pin Name | Remarks | IO | Description | L | H |
|-----|------|-------|-----------|-----------|---------|-----|--|---|--|
| 32 | P10 | SEG17 | | SEG17 | | 0 | Output to LCD Segment | | |
| 53 | P17 | SEG18 | | SEG18 | | 0 | Output to LCD Segment | | |
| 54 | P72 | SEG19 | | SEG19 | | 0 | Output to LCD Segment | | |
| 55 | P13 | SEG20 | | SEG20 | | 0 | Output to LCD Segment | | |
| 56 | P14 | SEG21 | | SEG21 | | 0 | Output to LCD Segment | | |
| 57 | P15 | SEG22 | | SEG22 | | 0 | Output to LCD Segment | | |
| 58 | P16 | SEG23 | | SEG23 | | 0 | Output to LCD Segment | | |
| 59 | P17 | SEG24 | | SEG24 | | 0 | Output to LCD Segment | | |
| 60 | P80 | SEG25 | | SEG25 | | 0 | Output to LCD Segment | | |
| 61 | P81 | SEG26 | | SEG26 | | 0 | Output to LCD Segment | | |
| 62 | P82 | SEG27 | | SEG27 | | 0 | Output to LCD Segment | | |
| 63 | P83 | SEG28 | | SEG28 | | 0 | Output to LCD Segment | | |
| 64 | P84 | SEG29 | | SEG29 | | 0 | Output to LCD Segment | | |
| 65 | P85 | SEG30 | | SEG30 | | 0 | Output to LCD Segment | | |
| 66 | P86 | SEG31 | | SEG31 | | 0 | Output to LCD Segment | | |
| 67 | P87 | SEG32 | | SEG32 | | 0 | Output to LCD Segment | | |
| 68 | P80 | SEG33 | | SEG33 | | 0 | Output to LCD Segment | | |
| 69 | P81 | SEG34 | | SEG34 | | 0 | Output to LCD Segment | | |
| 70 | P82 | SEG35 | | SEG35 | | 0 | Output to LCD Segment | | |
| 71 | P83 | SEG36 | | SEG36 | | 0 | Output to LCD Segment | | |
| 72 | P84 | SEG37 | M | SEG37 | | 0 | Output to LCD Segment | | |
| 73 | P85 | SEG38 | D0 | SEG38 | | 0 | Output to LCD Segment | | |
| 74 | P86 | SEG39 | OL7 | SEG39 | | 0 | Output to LCD Segment | | |
| 75 | P87 | SEG40 | CL1 | SEG40 | | 0 | Output to LCD Segment | | |
| 76 | | Vcc | | 5V | | | | | |
| 77 | P10 | TMOW | MONI | MONI | | 0 | Open the squelch forcibly (monitor) | | Squelch open forcibly |
| 78 | P11 | TMOLF | UT | UT | | 0 | The command to put out the light forcibly and flashing to LCD driver | | Put out the light forcibly |
| 79 | P12 | TMCFH | BEEP | BEEP | | 0 | Beep sound output | | Beep output |
| 80 | P13 | TMG | SCS | SCS | | 0 | Squelch open/close condition detection | | Squelch close |
| 81 | P14 | PWM | DMM | DMM | | 0 | LCD driver control | | Squelch open |
| 82 | P15 | IRQ1 | TMS | TMS | | 1 | Duty control of pulse output | | Duty control of pulse output |
| 83 | P16 | IRQ2 | SUBA | SUBA | | 1 | Transmission condition detection | | Transmission Reception |
| 84 | P17 | IRQ3 | SUBB | SUBB | | 1 | NF dial rotation detection | | NF dial rotation detection |
| 85 | P40 | SRK3 | DRST | DRST | | 0 | Dial pulse count reset | | During counting |
| 86 | P41 | R4D | GND | GND | | 1 | | | |
| 87 | P42 | TXD | GND | GND | | 1 | | | |
| 88 | P43 | IRQ0 | PDOWN | PDOWN | | 1 | Power OFF detection | | Power OFF |
| 89 | | AVcc | 5V | 5V | | | | | |
| 90 | P80 | AN0 | DO1 | DO1 | | 1 | Dial clock 1/2 | | |
| 91 | P81 | AN1 | DO2 | DO2 | | 1 | Dial clock 1/4 | | |
| 92 | P82 | AN2 | DO3 | DO3 | | 1 | Dial clock 1/8 | | |
| 93 | P83 | AN3 | DO4 | DO4 | | 1 | Dial clock 1/16 | | |
| 94 | P84 | AN4 | DO5 | DO5 | | 1 | Dial clock 1/32 | | |
| 95 | P85 | AN5 | DO6 | DO6 | | 1 | Dial clock 1/64 | | |
| 96 | P86 | AN6 | DO | DO | | 1 | Dial up rotation | | Up |
| 97 | P87 | AN7 | DO | DO | | 1 | Dial down rotation | | Down |
| 98 | PC0 | AN8 | DSDET | DSDET | | A/D | Dial speed detection | | The voltage according to the speed of rotation |
| 99 | PC1 | AN9 | RIT | RIT | | A/D | RIT VR position detection | | 0-5V |
| 100 | PC2 | AN10 | MC LPDOWN | MC LPDOWN | | A/D | MC LPDOWN detection | | 2-3V down |
| 1 | PC3 | AN11 | SIF | SIF | | A/D | S.S.FE Meter voltage output | | 0-5V |

2) MC3357 (XA0063)
Low Power FM IF


Vcc=6V
F=10.7MHz
Icc 3mA
Limit 5µV -3dB
Vo 350mV Dev=±3KHz

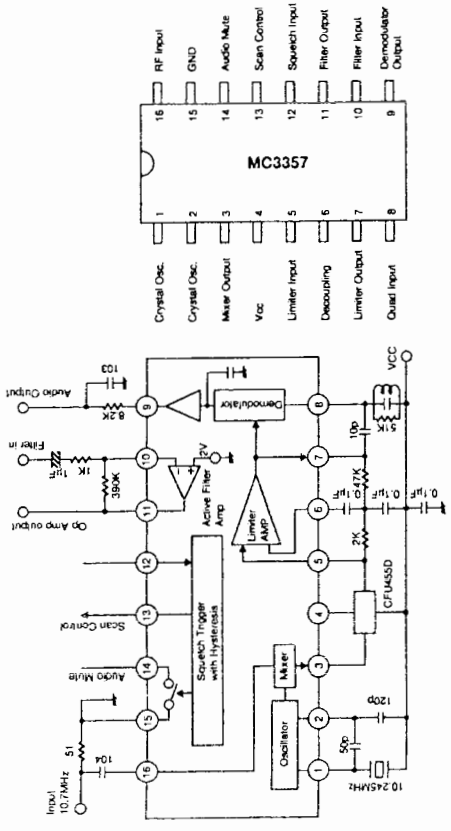

3) M5218FP (XA0068)
Dual Low Noise
Operational Amplifiers


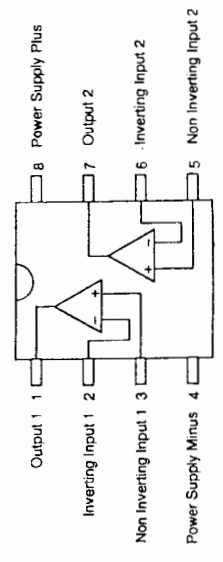


4) NJM78L08UA (XA0075)
8V Voltage Regulator




5) µPC1241H (XA0079)
Audio Power Amplifiers

Test Circuit

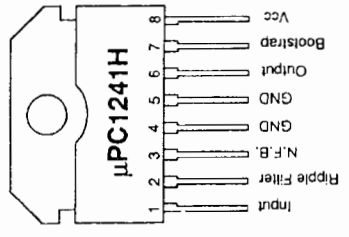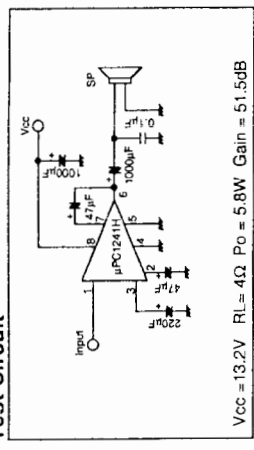


6) MC7808CT (XA0082)
8V Voltage Regulator

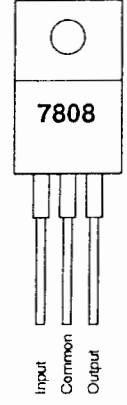


7) µPD6345GS (XA0114)
8bit Serial in Parallel Out Driver

| No. | Pin Name | Description |
|------|----------|-----------------------------|
| 1 | GND | GND terminal |
| 2 | EN | Enable terminal |
| 3 | LAT | Latch terminal |
| 4 | SO | Serial data output terminal |
| 5-12 | Q0-Q7 | Data output terminal |
| 13 | SIN | Serial data input terminal |
| 14 | SO | Serial clock input terminal |
| 15 | RES | Reset input terminal |
| 16 | VDD | Power supply terminal |


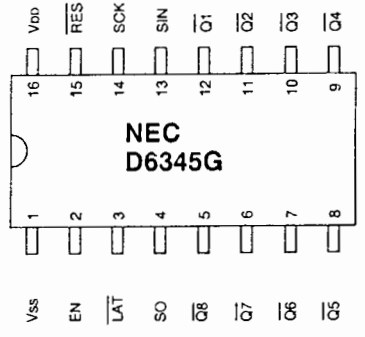


8) TC4S66F (XA0115)
Bilateral Switch




9) NJM2904M (XA0224)
Dual Operational Amplifiers

Block Diagram

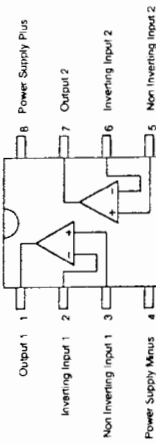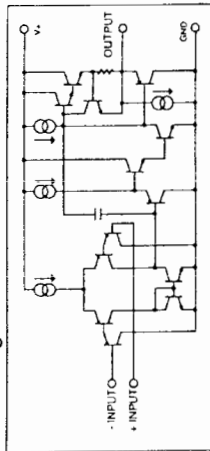

10) BU4052BF (XA0236)
Analog Multiplexer/Demultiplexer

Logic Diagram

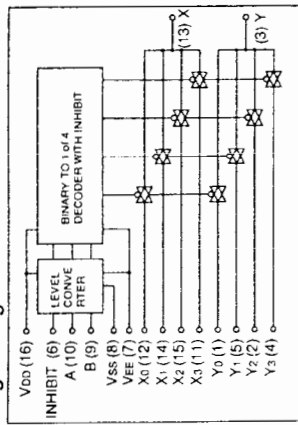

Truth Table

| INHIBIT | A | B | ON SWITCH |
|---------|---|---|-----------|
| L | L | L | X0 Y0 |
| L | L | H | X1 Y1 |
| L | H | L | X2 Y2 |
| L | H | H | X3 Y3 |
| H | X | X | NONE |

X: Don't Care


11) BU4094BF (XA0246)
8-Stage Shift Register

Truth Table

| Clock | Output enable | Strobe | Data | Parallel outputs | | Serial outputs | |
|-------|---------------|--------|------|------------------|---------|----------------|---------|
| | | | | Q1 | Qn | Qs | Q's |
| ↑ | L | X | X | Z | Z | Q7 | No Chg. |
| ↑ | L | X | X | Z | Z | Q7 | Qs |
| ↑ | H | L | X | No Chg. | No Chg. | Q7 | No Chg. |
| ↑ | H | H | L | L | L | Qn-1 | No Chg. |
| ↑ | H | H | H | H | H | Qn-1 | Q7 |
| ↑ | H | X | X | No Chg. | No Chg. | No Chg. | Qs |


Z=High Impedance
X=Don't Care

Block Diagram

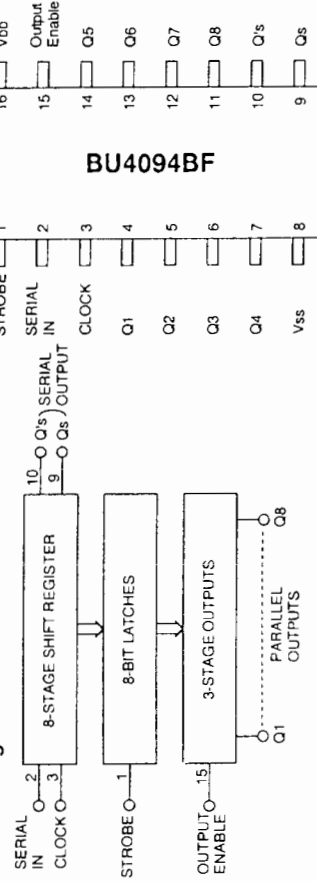

12) MC12019D (XA0292)
Two-Modulus Prescaler



Block Diagram

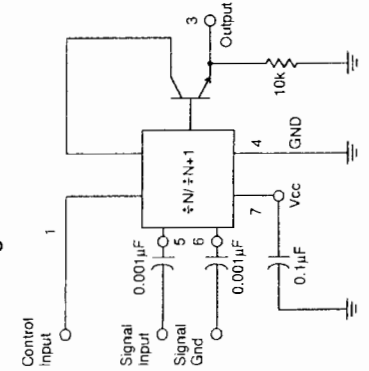

| Characteristics | Symbol | Min. | Typ | Max | Unit |
|------------------------------------|--------------|------|-----|------|------|
| Toggle frequency (Sine wave input) | fmax fmin | 225 | - | 20 | MHz |
| Supply current | Icc | - | - | 7.5 | mA |
| Control input High (1/20) | VIH | 2.0 | - | - | V |
| Control input Low (1/21) | VIL | - | - | 0.8 | V |
| Output voltage swing | Vout | 600 | - | 1200 | mVpp |
| Input voltage sensitivity | Vin | 200 | - | 800 | mVpp |
| PLL response time | tPLL | - | - | 70 | ns |



17) MB87086A (XA0297)
PLL Frequency Synthesizer

| No. | Pin Name | I/O | Description |
|-----|----------|-----|---|
| 1 | OSCIN | I | Crystal connection terminal |
| 2 | OSCOU | O | Crystal connection terminal |
| 3 | N | O | Phase comparator input monitor terminal |
| 4 | VDD | - | Comparator divider output terminal |
| | | | Power supply |
| 5 | Dep | O | Passive LPF connection terminal |
| | | | Ic-H: Drive mode, Dop=H |
| | | | Ic-V: High impedance |
| | | | Ic-L: Sink mode, Dop=L |
| 6 | VSS | - | GND terminal |
| 7 | LD | O | Phase detector output terminal |
| 8 | fin | I | Lock=H: Unlock/negative pulse |
| | | | Comparator divider input terminal |
| 9 | Clock | I | Serial clock input terminal |
| 10 | Data | I | Serial data input terminal |
| 11 | LE | I | Load enable input terminal |
| 12 | DOA | O | Active LPF connection terminal |
| | | | Ic-H: Drive mode, DOA=L |
| | | | Ic-V: High impedance |
| | | | Ic-L: Sink mode, DOA=H |
| 13 | fr | O | Phase comparator input monitor terminal |
| 14 | NC | - | Reference divider output terminal |
| | | | No connection |
| 15 | eV | O | Differential LPF connection terminal |
| 16 | eR | O | Ic-H: eV=H, eR=L |
| | | | Ic-V: eV=H, eR=H |
| | | | Ic-L: eV=L, eR=H |

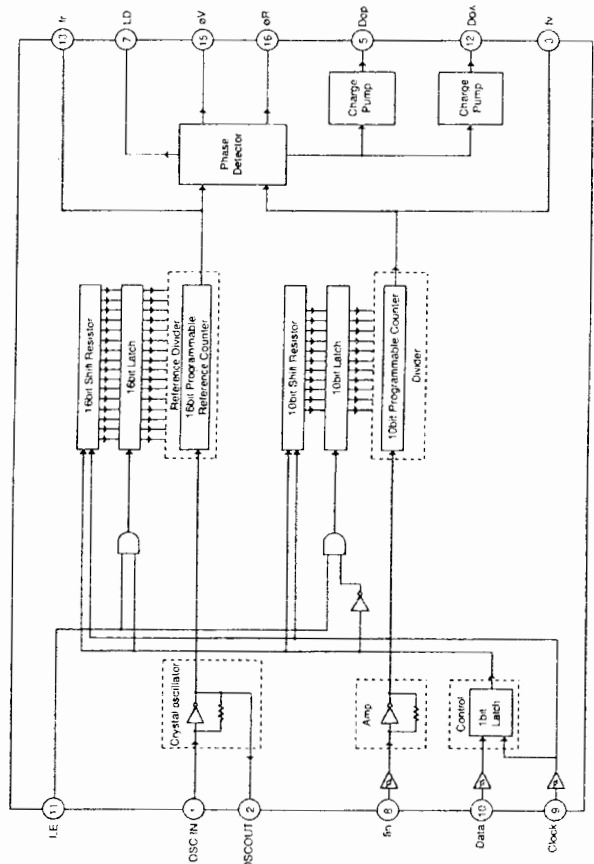
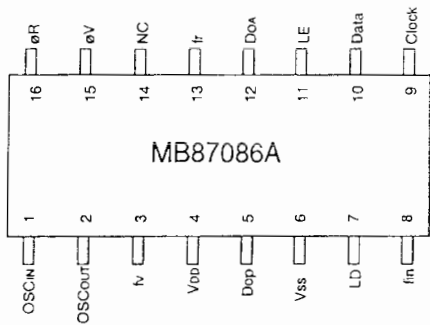


18) MB87014A (XA0298)
PLL Frequency Synthesizer

| No. | Pin Name | I/O | Description |
|-----|----------|-----|---|
| 1 | OSCIN | I | Crystal connection terminal |
| 2 | OSCOU | O | Crystal connection terminal |
| 3 | N | O | Phase comparator input monitor terminal |
| 4 | VDD | - | Comparator divider output terminal |
| | | | Power supply |
| 5 | Dep | O | Passive LPF connection terminal |
| | | | Ic-H: Drive mode, Dop=H |
| | | | Ic-V: High impedance |
| | | | Ic-L: Sink mode, Dop=L |
| 6 | VSS | - | GND terminal |
| 7 | LD | O | Phase detector output terminal |
| 8 | fin | I | Lock=H: Unlock/negative pulse |
| | | | Precalculator input terminal |
| 9 | Clock | I | Serial clock input terminal |
| 10 | Data | I | Serial data input terminal |
| 11 | LE | I | Load enable input terminal |
| 12 | DOA | O | Active LPF connection terminal |
| | | | Ic-H: Drive mode, DOA=L |
| | | | Ic-V: High impedance |
| | | | Ic-L: Sink mode, DOA=H |
| 13 | fr | O | Phase comparator input monitor terminal |
| 14 | NC | - | Reference divider output terminal |
| | | | No connection |
| 15 | eV | O | Differential LPF connection terminal |
| 16 | eR | O | Ic-H: eV=H, eR=L |
| | | | Ic-V: eV=H, eR=H |
| | | | Ic-L: eV=L, eR=H |

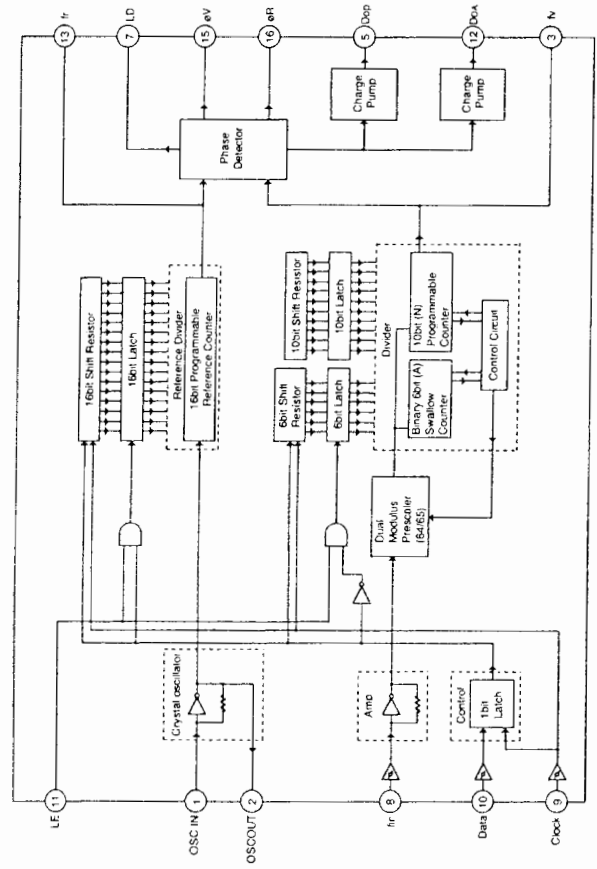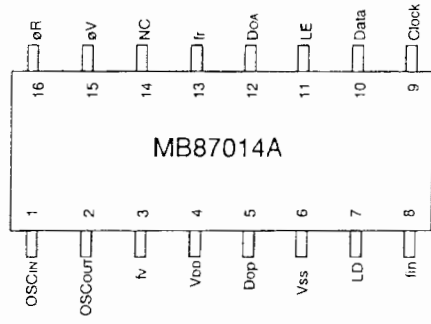



19) MC4001BF (XA0299)
Quad 2-Input NOR Gate

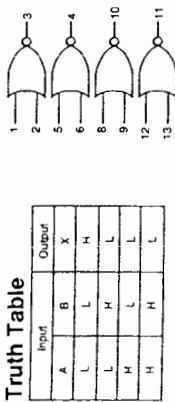


20) AN612 (XA0300)
Balanced Modulator Circuit

| Parameter | Symbol | Condition | Ratings | Unit |
|--------------------------------|---------------------|-----------------------|---------|------|
| Max. supply voltage | Vcc | | 14.4 | V |
| Supply current | Icc | | 15 | mA |
| Power dissipation | PD | | 220 | mW |
| Total current | I _{tot} | | 9.5 | mA |
| Zener voltage | V _{S-4} | | 6.15 | V |
| Signal input terminal voltage | V ₁₋₄ | V ₆ =12.0V | 3.1 | V |
| Carrier input terminal voltage | V ₃₋₄ | | 3.4 | V |
| Output terminal voltage | V ₇₋₄ | | 8.6 | V |
| Output voltage (BM AC) | V _o (BM) | V ₆ =9.0V | -3 | dBm |
| Carrier suppression | SC | | 50 | dB |

Test Circuit

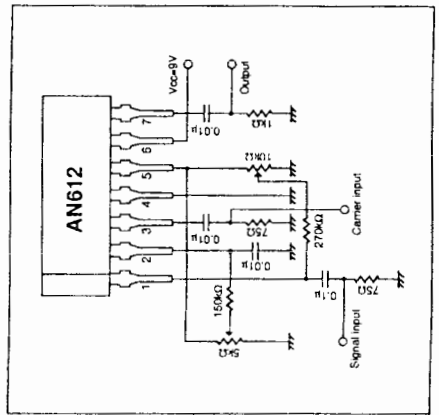


21) M5222FP (XA0385)
Low Voltage Dual VCA

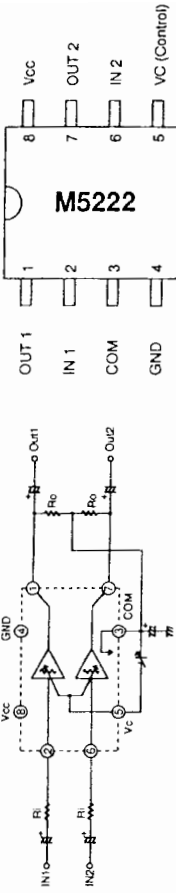


| Parameter | Symbol | Condition | Vcc | Min | Typ | Max | Unit |
|------------------------|------------------|---|-----|-----|-----|-----|-------|
| Supply current | Icc | V _i =0, V _c =0 | 3V | 2.5 | 3.6 | 5.5 | mA |
| Max. input voltage | V _{iM1} | f _i =1kHz, V _c =0, THD=1%, R _i =10kΩ, R _o =20kΩ | 3V | 0.7 | 1.0 | - | Vrms |
| | V _{iM2} | f _i =1kHz, V _c =0, THD=1%, R _i =50kΩ, R _o =20kΩ | 9V | 2.3 | 3.4 | - | Vrms |
| Max. attenuation level | ATTM | V _c =-270mV, R _i =10kΩ, R _o =20kΩ | 3V | 80 | 90 | - | dB |
| Noise output voltage | V _{nO1} | V _c =0 (ATT=-1.4dB) R _i =10kΩ, R _o =20kΩ, BW=20Hz-20kHz | 3V | - | 30 | 60 | μVrms |
| Noise output voltage | V _{nO2} | V _c =-40dB R _i =10kΩ, R _o =20kΩ, BW=20Hz-20kHz | 3V | - | 5 | - | μVrms |

22) LC75821W (XA0303)
LCD Driver

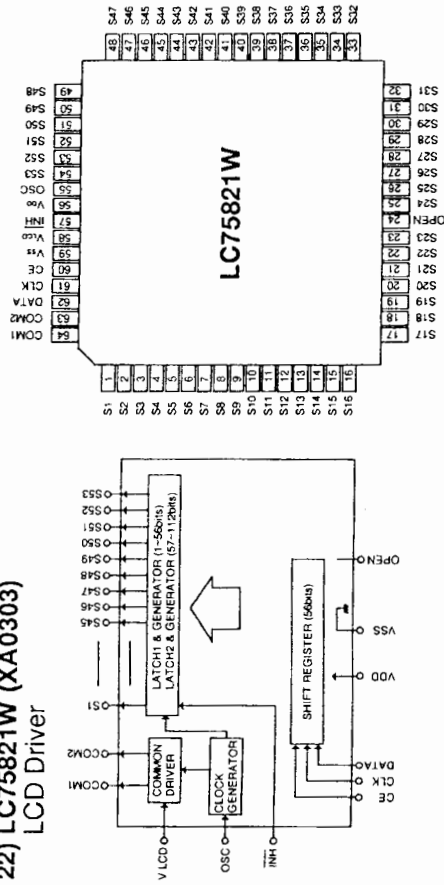

| Pin Name | Description |
|---------------|--|
| S1-S53 | Segment output terminal |
| COM1, 2 | Common output terminal |
| V LCD | LCD Bias voltage setting terminal |
| OSC | Oscillator terminal |
| CE, CLK, DATA | Serial data transmission terminal |
| VSS, VDD | Power supply terminal |
| INH | Display turn off input terminal INH="1": V _{ss} turn off (S1-S53, COM1, 2="1") INH="1": V _{dd} turn on |
| OPEN | No connection |


23) BA4425F (XA0304)
FM Front End IC

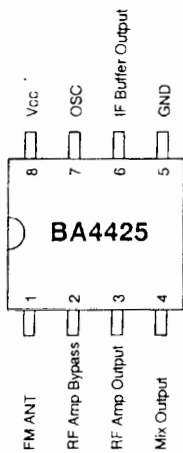

Vcc=4V

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|-------------------------------|-----------|-----------------------------------|-----|-----|-----|--------|
| Current | I_Q | No signal | 2.6 | 4.5 | 7.2 | mA |
| Saturated output voltage | V_O | $f_d=98\text{MHz}$, 80dB μ V | 30 | 50 | 72 | mV rms |
| Local oscillator voltage | V_{OSC} | $f_{osc}=108\text{MHz}$ | 200 | 400 | 630 | mV rms |
| Conversion gain | G_{vc} | $f_d=98\text{MHz}$, 55dB μ V | 31 | 36 | 42 | dB |
| Local oscillator stop voltage | OSC STOP | | - | - | 1.2 | V |

Test Circuit

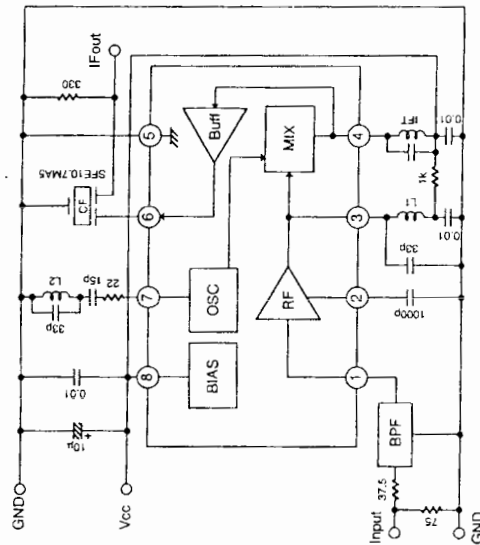


24) TC74AC74F (XA0305)
Dual D-Type Flip Flop

Truth Table


| INPUTS | | OUTPUTS | | FUNCTION |
|--------|----|---------|----|-----------|
| CLR | PR | D | CK | |
| L | H | X | X | CLEAR |
| H | L | X | X | PRESET |
| L | L | X | X | - |
| H | H | L | L | - |
| H | H | H | H | - |
| H | H | X | X | NO CHANGE |

X=Don't Care




25) L78LR05B (XA0338)
Voltage Regulator


Block Diagram

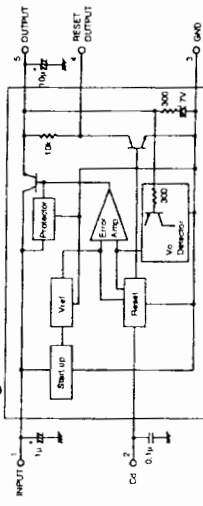


| Parameter | Symbol | Ratings | Unit |
|----------------|-----------|---------|------|
| Input voltage | V_{in} | 7.5-20 | V |
| Output current | I_{out} | 1-150 | mA |
| Output voltage | V_{out} | 5.0 | V |

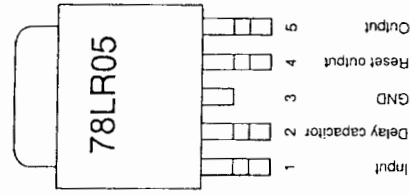

26) MCT7805 (XA0346)
5V Voltage Regulator



29) μ PC1037GR (XA0379)
Double Balanced Modulator

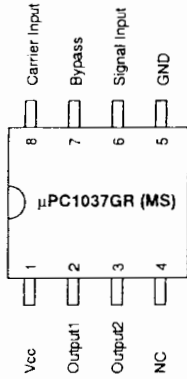



Vcc=6.0V

| Characteristics | Symbol | Condition | Min. | Typ. | Max. | Unit |
|----------------------------|--------|--|------|-------|------|----------------|
| Circuit current | Icc | No signal | - | 12 | 16 | mA |
| Conversion gain | Gc | Signal: 70mV r.m.s. 1.75MHz | -2 | 0 | +2 | dB |
| Signal leakage | Ls | Carrier: 100mV r.m.s. 28.25MHz | - | -40 | -20 | dB |
| Carrier leakage | Lc | Output: 30MHz | - | -32 | -20 | dB |
| Inter modulated distortion | IMD | Signal 1: 42.5mV r.m.s. 1.75MHz Signal 2: 42.5mV r.m.s. 2.00MHz Carrier: 100mV r.m.s. 28.25MHz Output: 29.75MHz | - | -45 | -35 | dB |
| Signal input impedance | Zsi | | - | 500/9 | - | Ω /pF |
| Carrier input impedance | Zci | | - | 1.0/9 | - | k Ω /pF |
| Output impedance | Zol | Output 1 | - | 350/7 | - | Ω /pF |

27) TC4030BF (XA0347)
Quad Exclusive-OR Gate


| Input | Output |
|-------|--------|
| A B | X |
| L L | L |
| L H | H |
| H L | H |
| H H | L |

28) 24LC16B (XA0351)
16K bits CMOS Serial EEPROM

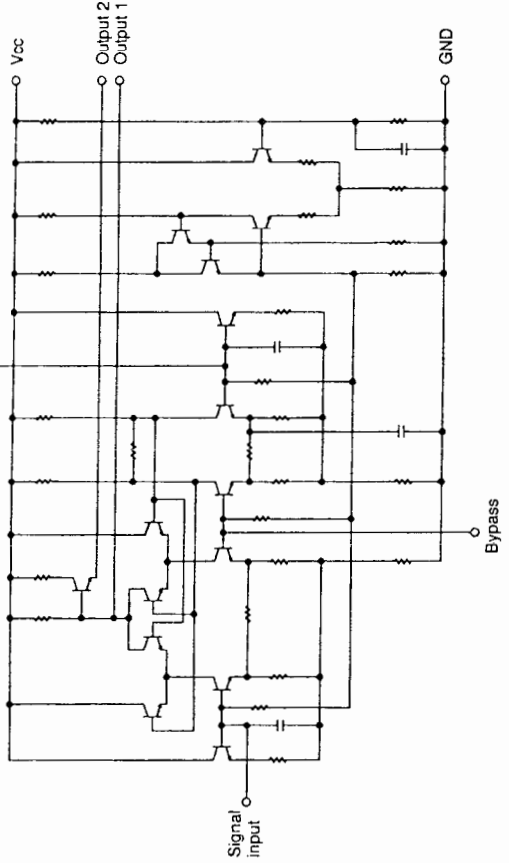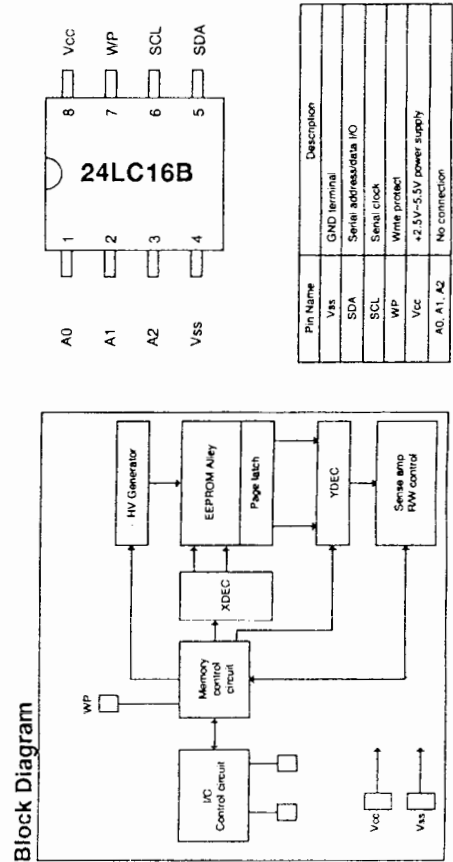

| Pin Name | Description |
|------------|-------------------------|
| Vss | GND terminal |
| SDA | Serial address/data I/O |
| SCL | Serial clock |
| WP | Write protect |
| Vcc | +2.5V-5V power supply |
| A0, A1, A2 | No connection |

31) LCD Connection

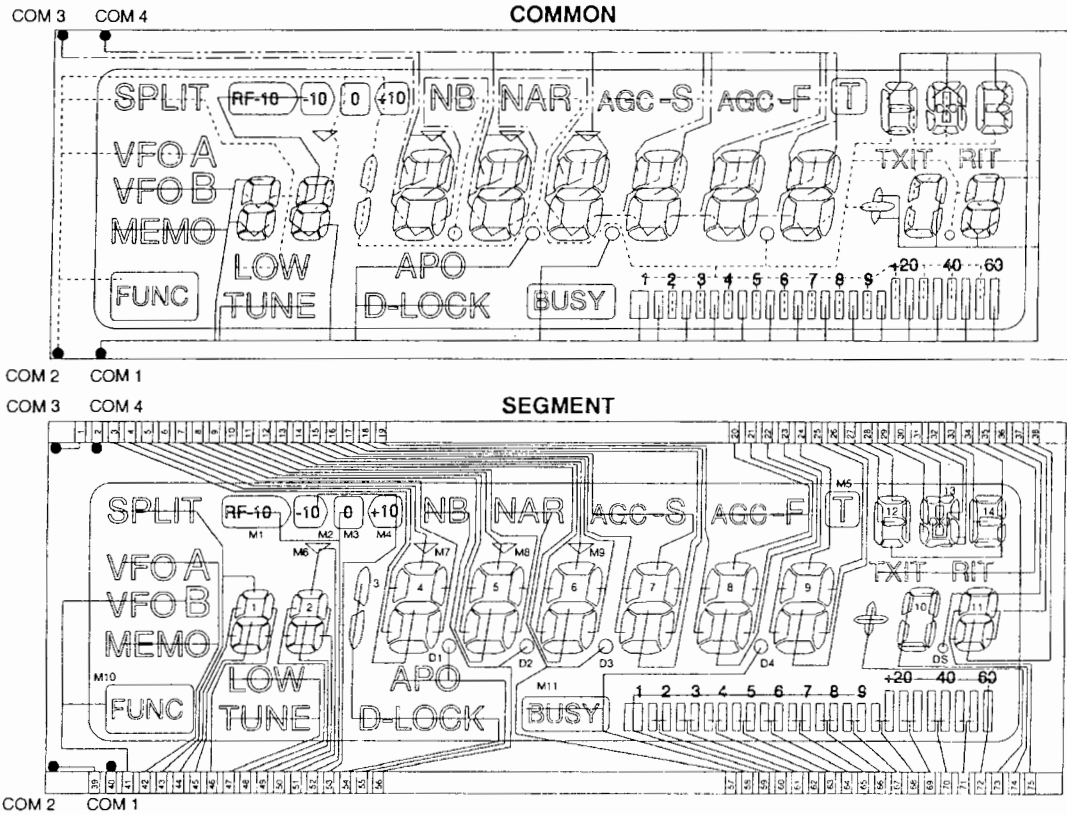


30) Transistor, Diode and LED Outline Drawings

Top View


| | | | | | | | |
|--------------------|----------------------|-------------------|-------------------|--------------------|--------------------|---------------------|--------------------|
| 1SS355 XD0254 | 1SS356 XD0272 | 1SV217 XD0233 | DAN202U XD0230 | DAN235U XD0246 | DAP202U XD0231 | DAP236U XD0266 | DZ74.3B XD0150 |
| DTZ5.6C XD0140 | MA27-B XD0263 | MA30-B XD0264 | MA704WA XD0127 | MA728TX XD0234 | MI308 XD0014 | RLS4152 XD0039 | RN711H XD0257 |
| S3275 XD0269 | SG5LR XD0265 | CL-170G XL0042 | CL-170R XL0043 | 2SK210 XE0006 | 2SK2171 XE0026 | 3SK131V12 XE0028 | 2SA1576 XT0094 |
| 2SB1132 XT0061 | 2SC1971 XT0101 | 2SC1972 XT0046 | 2SC2904 XT0128 | 2SC2954 XT0084 | 2SC3082 XT0059 | 2SC3324 XT0060 | 2SC3419Y XT0127 |
| 2SC4081 XT0095 | 2SC4081LMT XT0111 | 2SC4089 XT0096 | 2SD1664 XT0136 | DTA114YU XU0112 | DTA123EU XU0116 | DTA144EU XU0125 | DTB123YK XU0155 |
| DTC124EU XU0140 | DTC144EU XU0148 | FMA4 XU0067 | UMA9TR XU0049 | UMC3TR XU0047 | UN2223 XU0176 | UN5111 XU0175 | UN5112 XU0174 |
| UN511F XU0051 | UN5211 XU0078 | UN5211 XU0051 | UN5211 XU0078 | UN5211 XU0051 | UN5211 XU0051 | UN5211 XU0051 | UN5211 XU0051 |
| BR B E | LS B E | JP B E | 54 B C E | 54 B C E | 12 B E | 16 B E | F52 B E |
| 25 B E | 26 B E | A4 C2 C1 | A9 C2 C1 | C3 C2 C1 | 9C B E | 6A B E | 6B B E |
| 60 B E | 6A B E | 8Q B E | | | | | |

EXPLODED VIEW

1) Front Control Unit 1

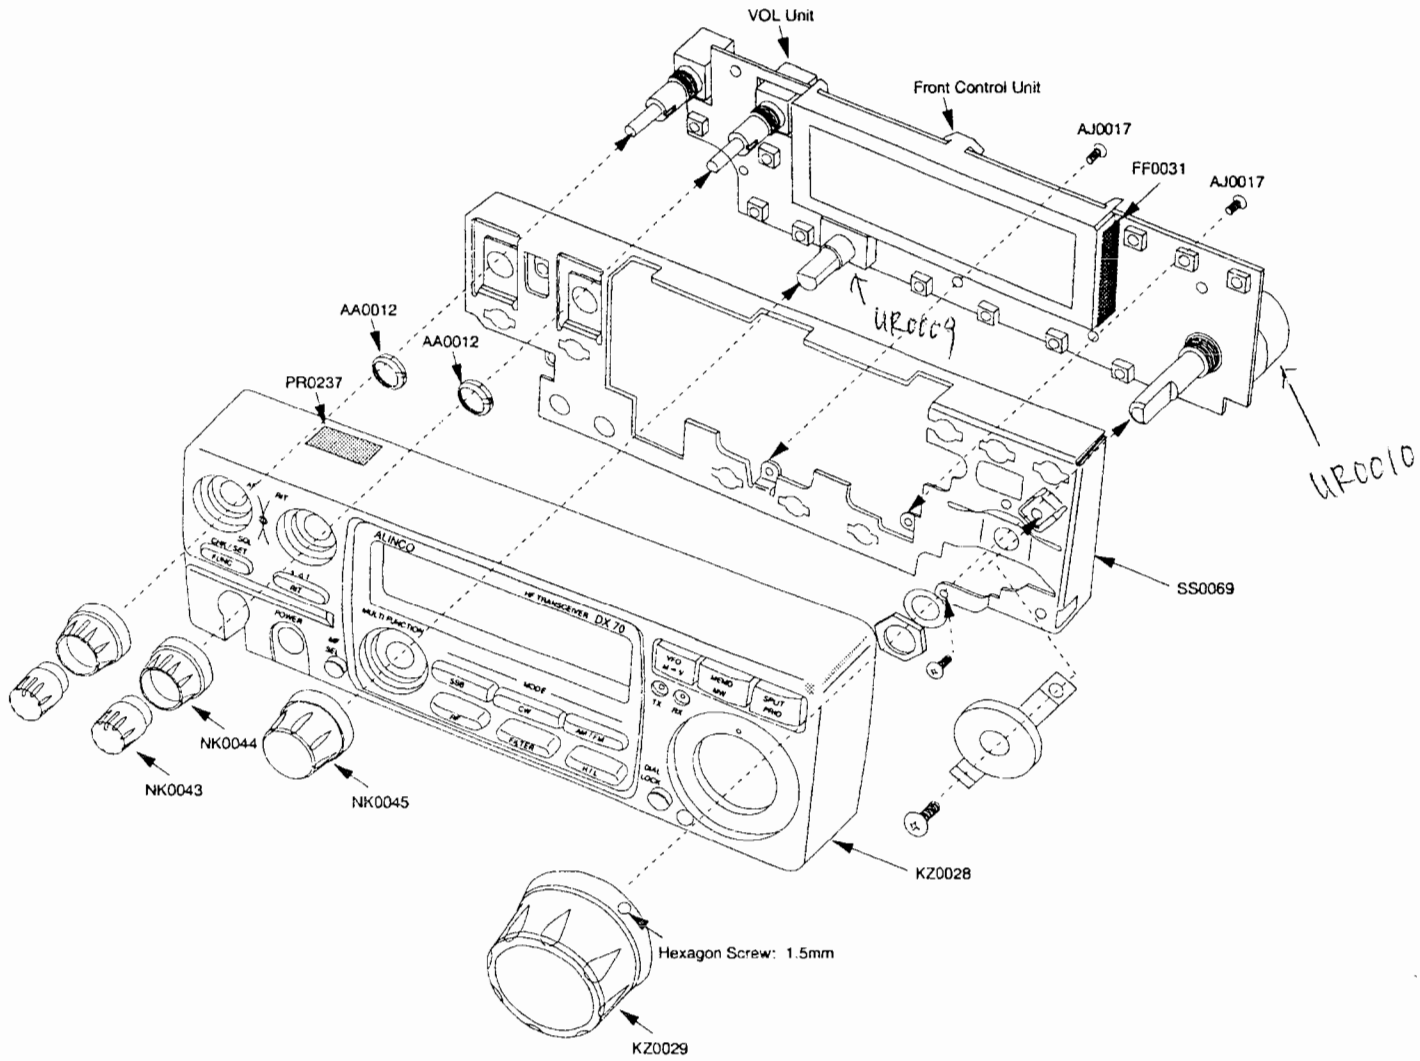


2) Front Control Unit 2

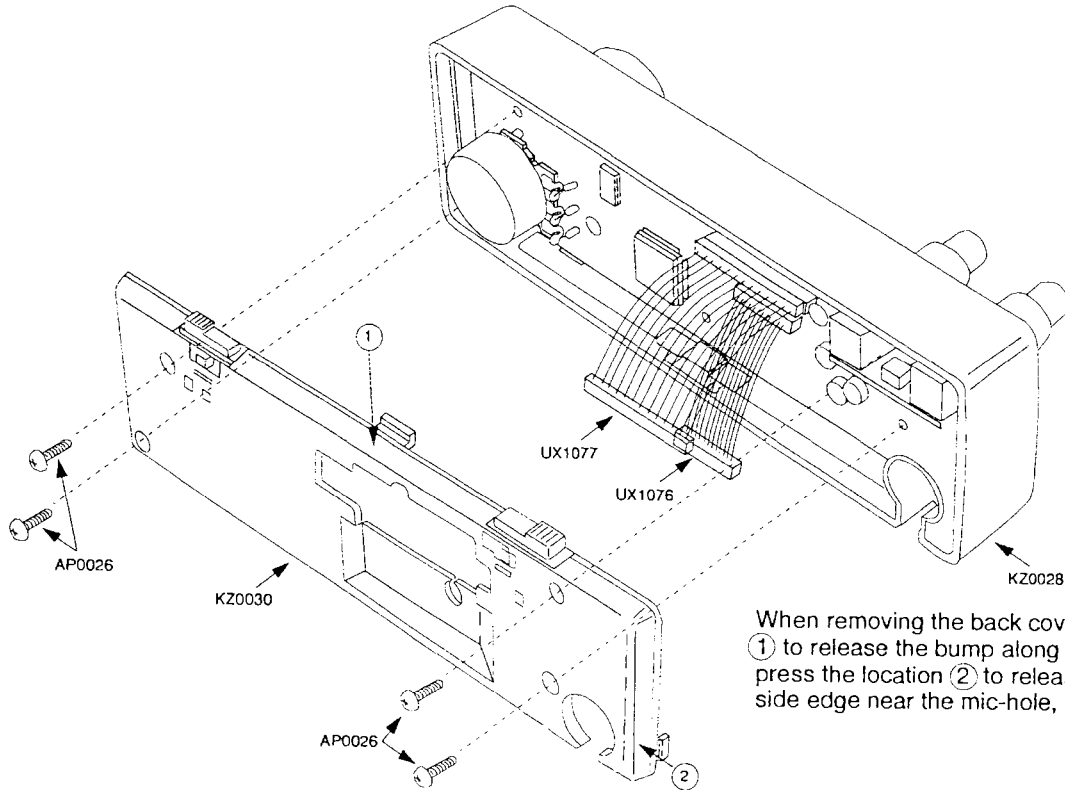


When removing the back cover, press the location ① to release the bump along the top edge, then press the location ② to release the bump along the side edge near the mic-hole, and open.


3) LCD Unit

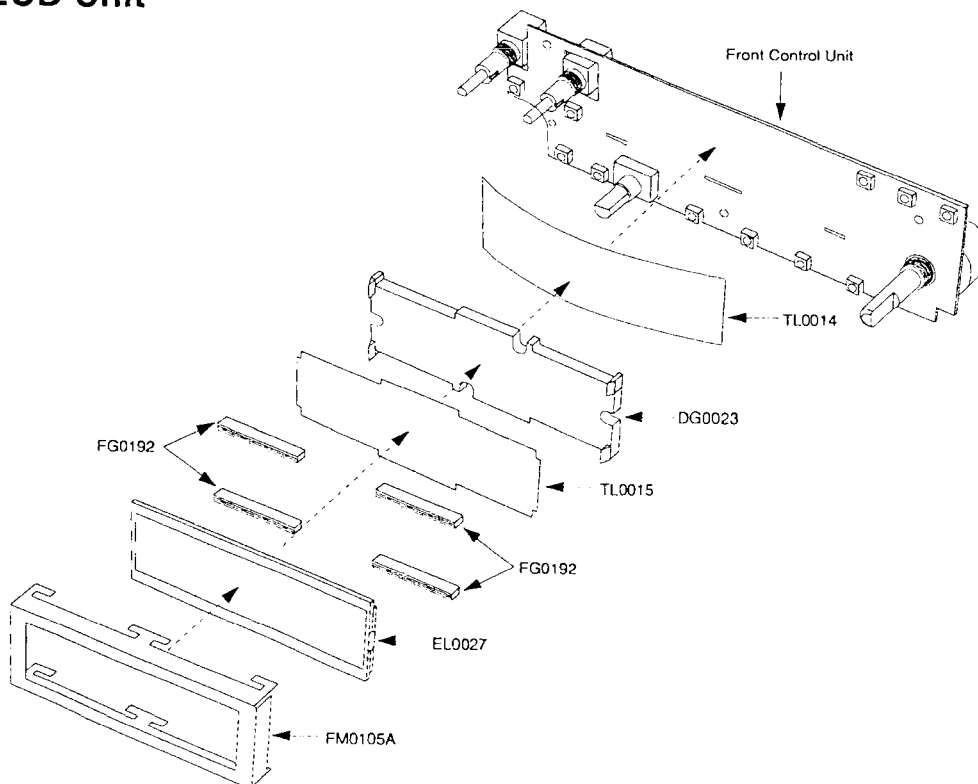


4) PLL Unit and Fan

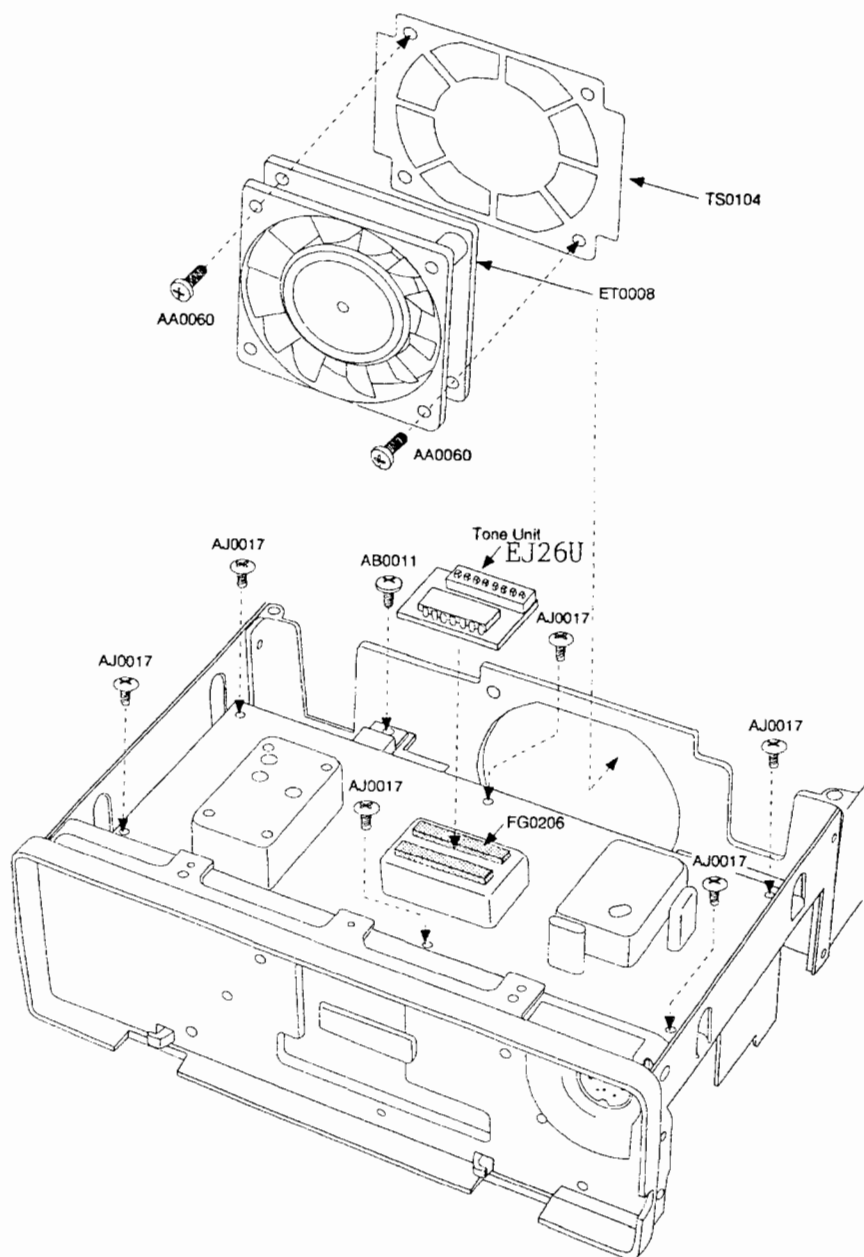


5) Top View 1

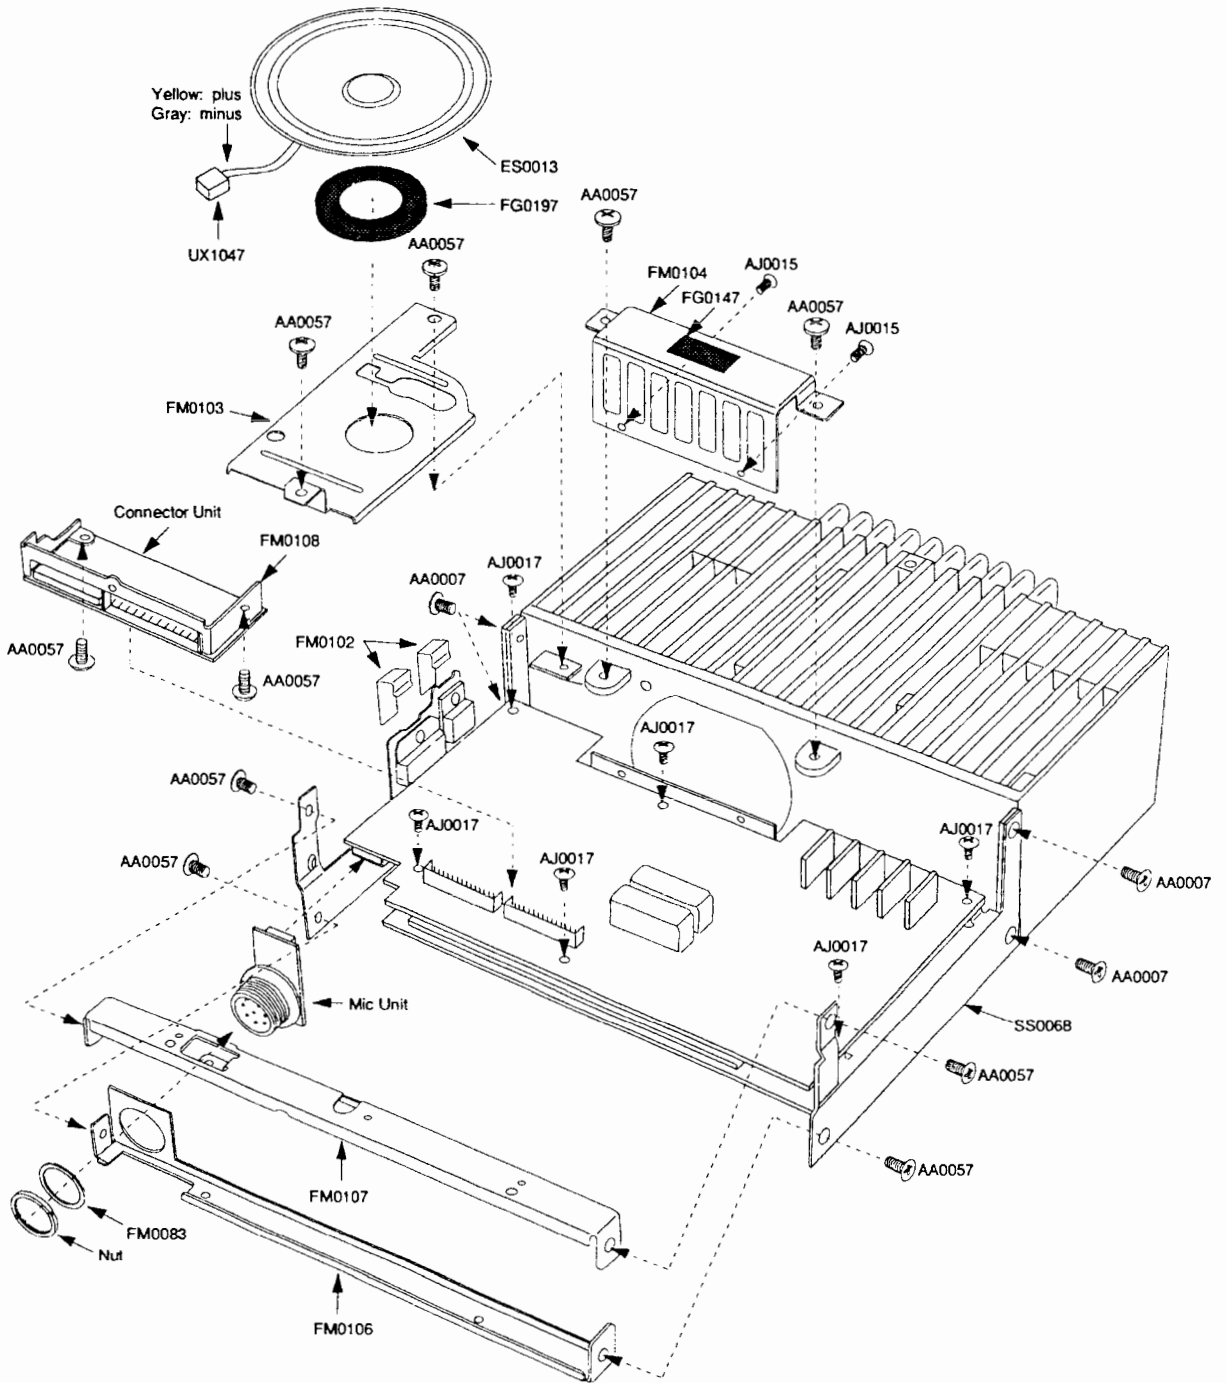


6) Top View 2

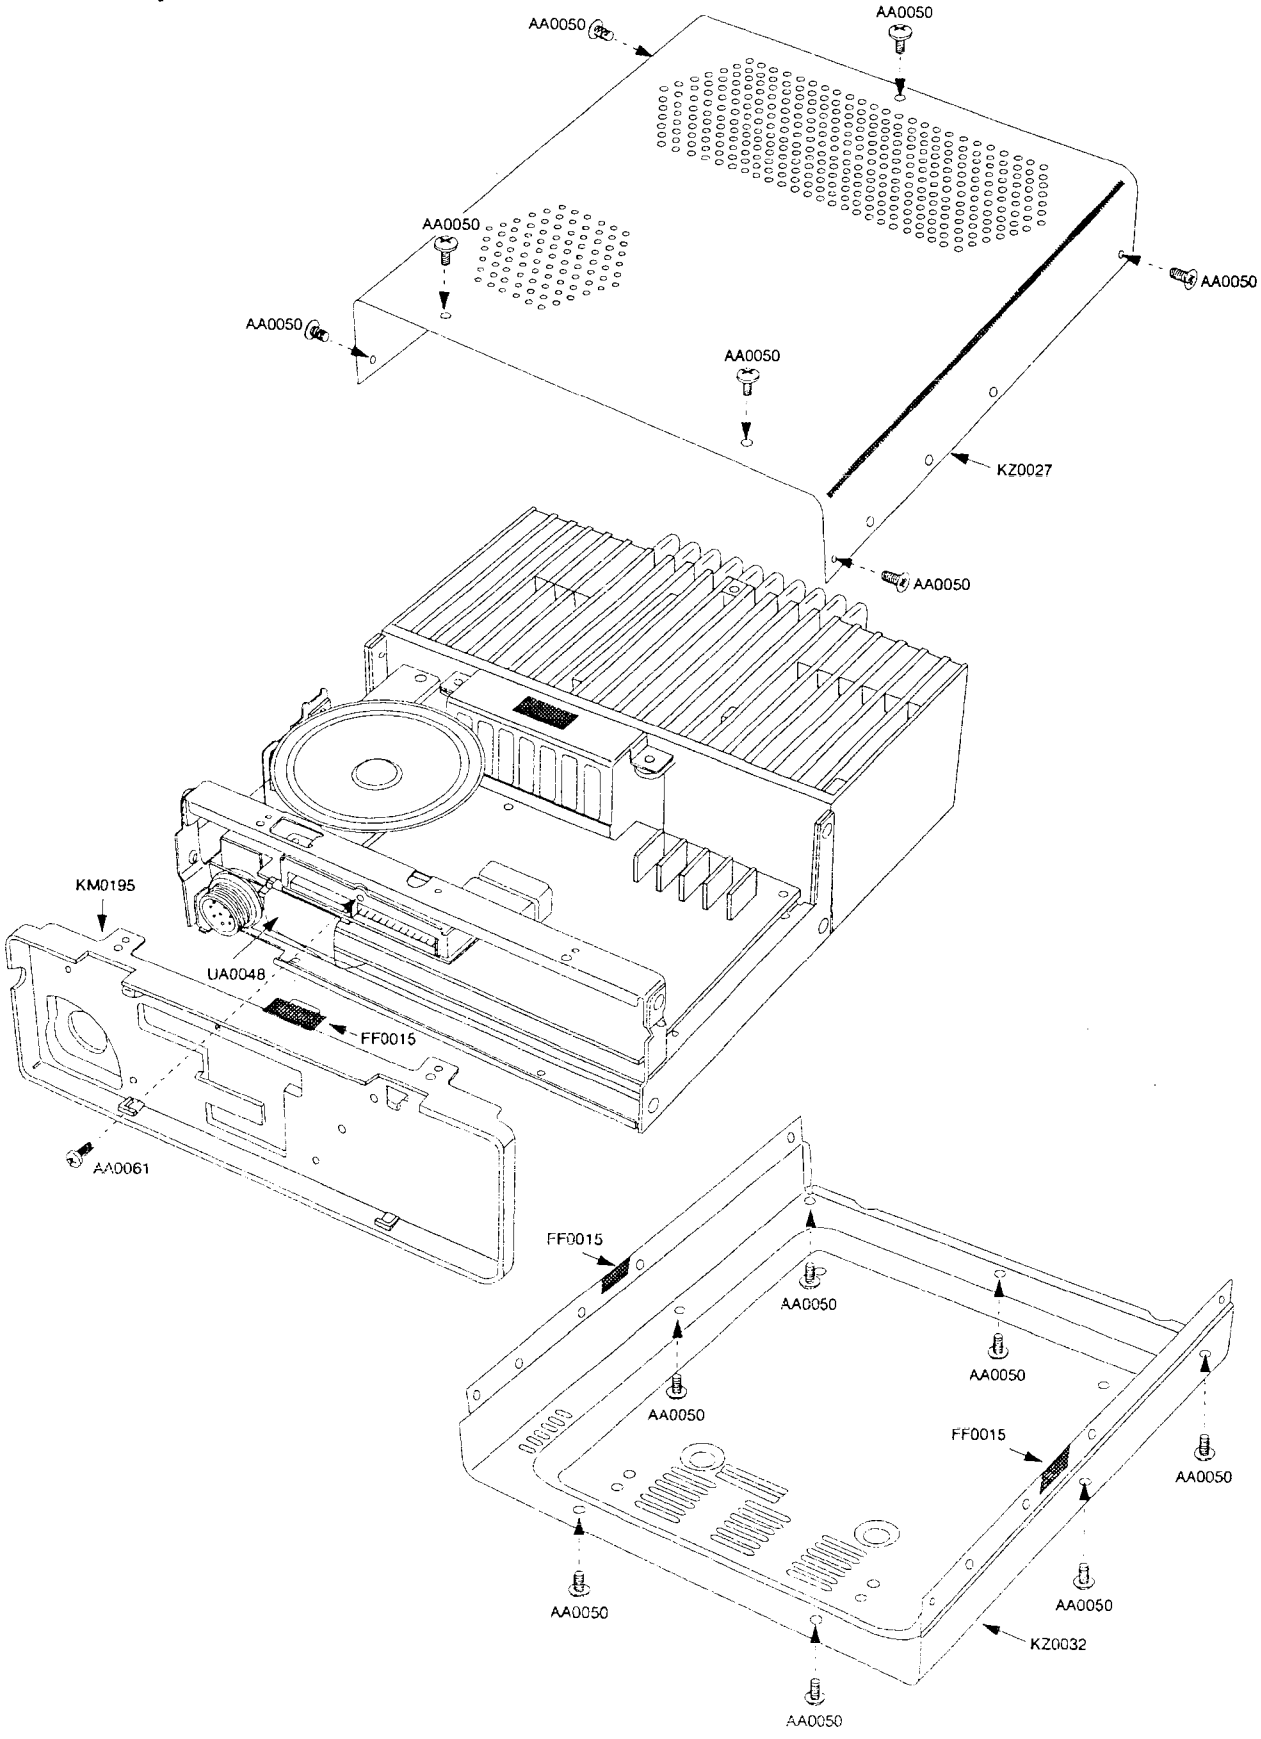

7) LPF Unit

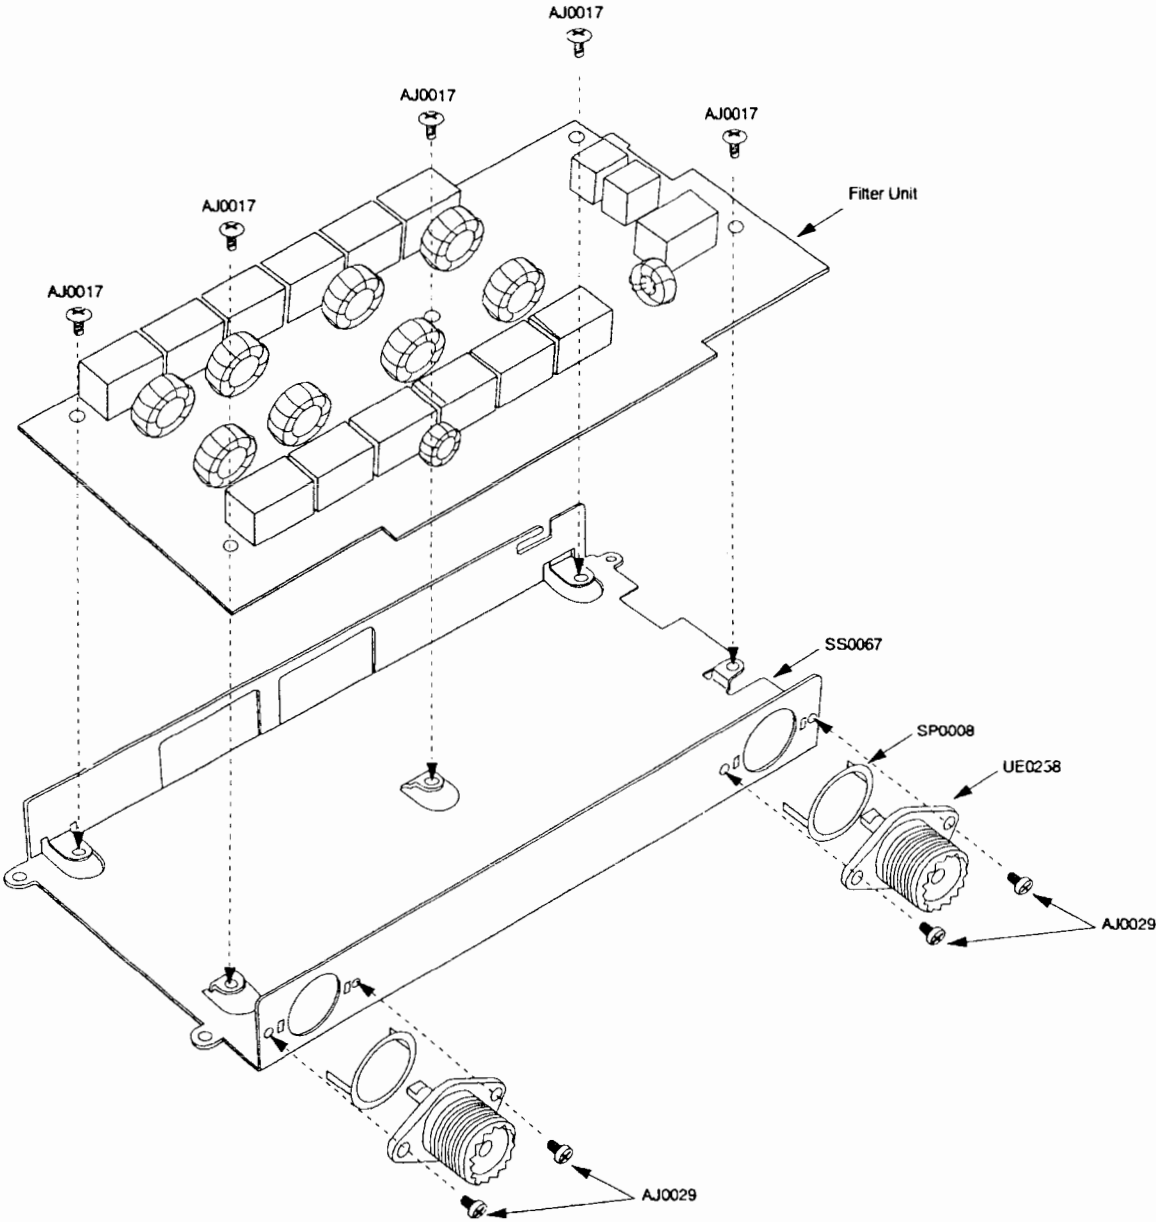

8) PA Unit and LPF Unit

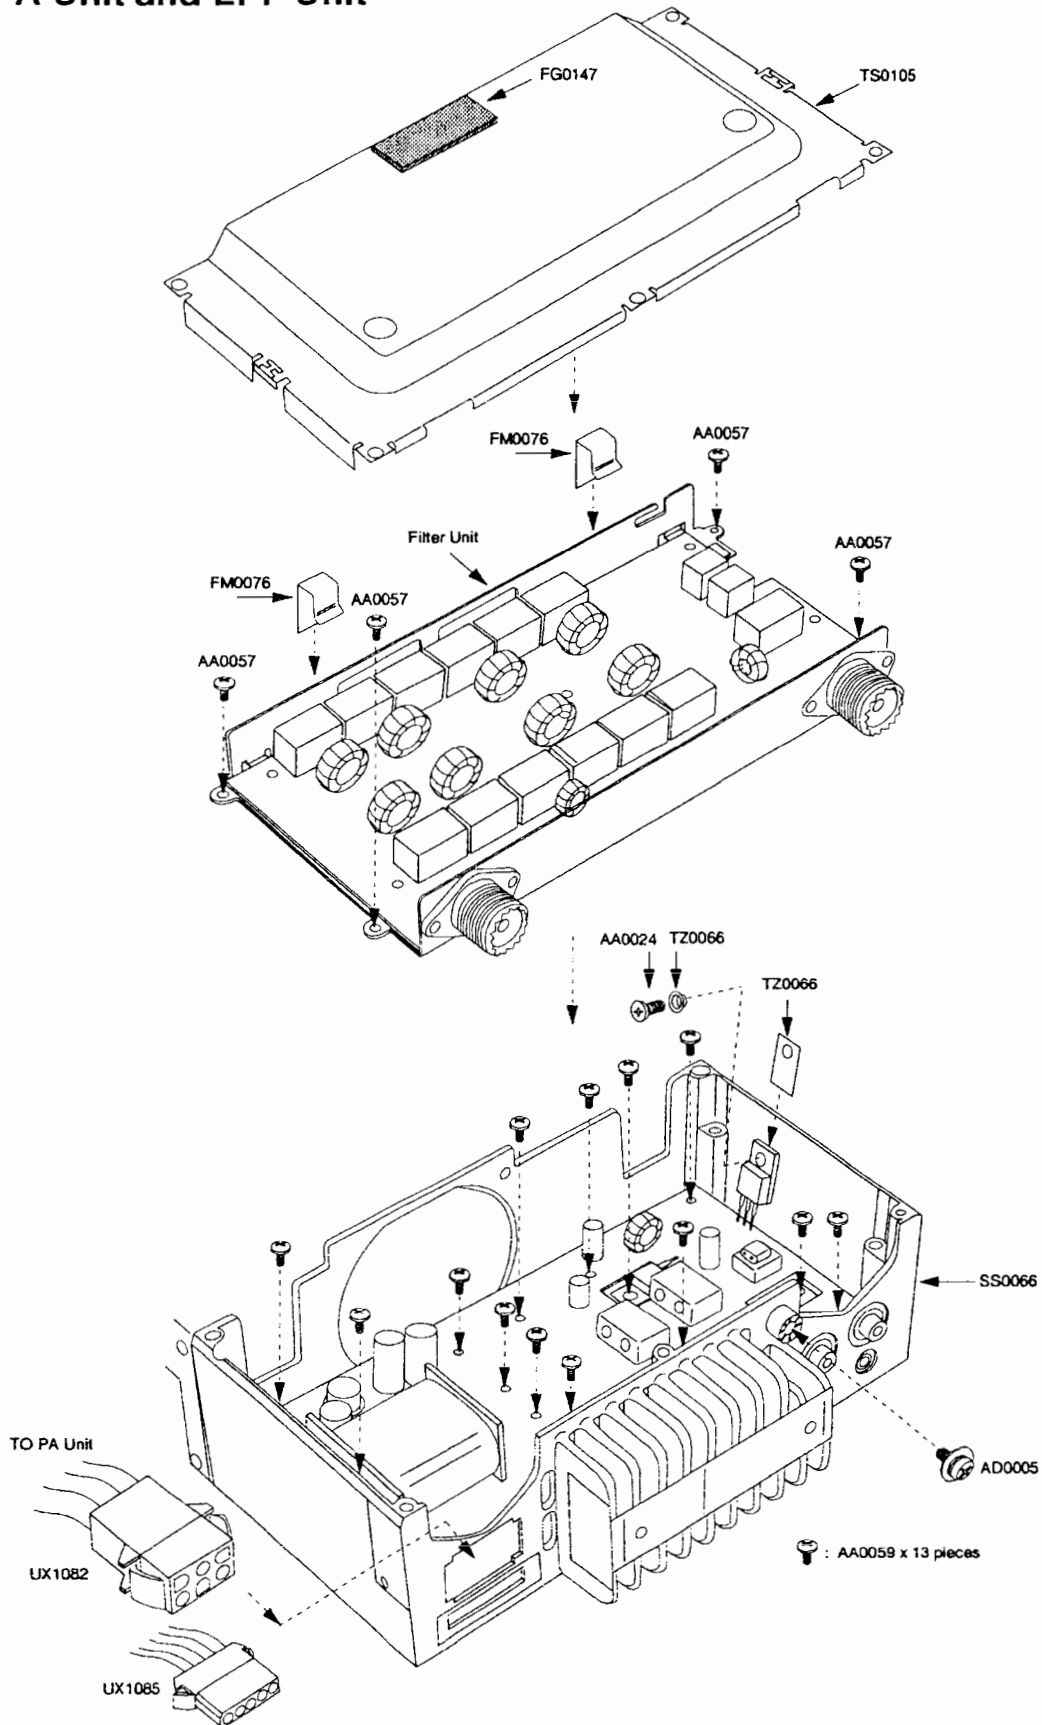

PARTS LIST

| Ref. No. | MAIN Unit | | | Ref. No. | MAIN Unit | | | Ref. No. | MAIN Unit | | |
|----------|-----------|---------------|------------------|----------|-----------|---------------|------------------|----------|-----------|-----------------|------------------|
| | Parts No. | Description | Parts Name | | Parts No. | Description | Parts Name | | Parts No. | Description | Parts Name |
| C3 | CU3056 | Chip C. | C1608JF1E4732T-A | C141 | CU3056 | Chip C. | C1608JF1E4732T-A | C187 | CU3056 | Chip C. | C1608JF1E4732T-A |
| C5 | CU3035 | Chip C. | C1608JBIH103KT-A | C142 | CU3031 | Chip C. | C1608JBIH471KT-A | C188 | CU3056 | Chip C. | C1608JF1E4732T-A |
| C8 | CU3056 | Chip C. | C1608JF1E4732T-A | C143 | CU3056 | Chip C. | C1608JF1E223KT-A | C189 | CS0372 | Chip Tantulum | TMCMB1C106MTR |
| C7 | CU3056 | Chip C. | C1608JF1E4732T-A | C144 | CU3056 | Chip C. | C1608JF1E4732T-A | C190 | CU3102 | Chip C. | C1608JBI333KT-A |
| C9 | CU3059 | Chip C. | C1608JF1E1042T-A | C145 | CU3056 | Chip C. | C1608JF1E4732T-A | C191 | CU3047 | Chip C. | C2012JBI104KT-A |
| C10 | CU3028 | Chip C. | C1608JF1E1042T-A | C146 | CU3015 | Chip C. | C1608JF1E1042T-A | C192 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C11 | CU3047 | Chip C. | C1608JBIH103KT-A | C147 | CU3056 | Chip C. | C1608JF1E1042T-A | C193 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C12 | CU3024 | Chip C. | C1608JBIH103KT-A | C148 | CU3031 | Chip C. | C1608JF1E1042T-A | C194 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C13 | CU3011 | Chip C. | C1608JBIH103KT-A | C149 | CU3051 | Chip C. | C1608JBIH471KT-A | C195 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C14 | CU3018 | Chip C. | C1608JBIH103KT-A | C150 | CU3056 | Chip C. | C1608JBIH103KT-A | C196 | CS0372 | Chip Tantulum | TMCMB1C106MTR |
| C15 | CU3027 | Chip C. | C1608JBIH103KT-A | C151 | CU3056 | Chip C. | C1608JF1E4732T-A | C197 | CU3045 | Chip C. | C1608JBIH682KT-A |
| C16 | CU3028 | Chip C. | C1608JBIH103KT-A | C152 | CU3056 | Chip C. | C1608JF1E4732T-A | C198 | CU3102 | Chip C. | C1608JBI333KT-A |
| C17 | CU3013 | Chip C. | C1608JBIH103KT-A | C153 | CU3056 | Chip C. | C1608JF1E4732T-A | C199 | CU3029 | Chip C. | C1608JBIH331KT-A |
| C18 | CU3047 | Chip C. | C1608JBIH103KT-A | C154 | CU3056 | Chip C. | C1608JF1E4732T-A | C200 | CS0230 | Chip Tantulum | TMCMB1C106MTR |
| C19 | CU3025 | Chip C. | C1608JBIH103KT-A | C155 | CU3056 | Chip C. | C1608JF1E4732T-A | C201 | CU3018 | Chip C. | C1608JBIH390JT-A |
| C20 | CU3056 | Chip C. | C1608JF1E4732T-A | C156 | CU3056 | Chip C. | C1608JF1E4732T-A | C202 | CU3029 | Chip C. | C1608JBIH331KT-A |
| C21 | CU3056 | Chip C. | C1608JF1E4732T-A | C157 | CU3056 | Chip C. | C1608JF1E4732T-A | C203 | CU3056 | Chip C. | C1608JF1E4732T-A |
| C22 | CU3056 | Chip C. | C1608JF1E4732T-A | C158 | CU3056 | Chip C. | C1608JF1E4732T-A | C204 | CS0061 | Chip Tantulum | TMCMB1C106MTR |
| C23 | CU3056 | Chip C. | C1608JF1E4732T-A | C159 | CU3056 | Chip C. | C1608JF1E4732T-A | C205 | CS0230 | Chip Tantulum | TMCMB1C106MTR |
| C24 | CU3007 | Chip C. | C1608JBIH060CT-A | C160 | CU3056 | Chip C. | C1608JF1E4732T-A | C206 | CU3101 | Chip C. | C1608JBI3473KT-A |
| C25 | CU3047 | Chip C. | C1608JBIH03KT-A | C161 | CU3056 | Chip C. | C1608JF1E4732T-A | C207 | CU3059 | Chip C. | C1608JF1E1042T-A |
| C26 | CU3012 | Chip C. | C1608JBIH103KT-A | C162 | CU3039 | Chip C. | C1608JBIH223KT-A | C208 | CU3059 | Chip C. | C1608JF1E1042T-A |
| C27 | CU3047 | Chip C. | C1608JBIH103KT-A | C163 | CU3056 | Chip C. | C1608JF1E1042T-A | C209 | CU3059 | Chip C. | C1608JF1E1042T-A |
| C28 | CU3043 | Chip C. | C1608JBIH471KT-A | C164 | CU3056 | Chip C. | C1608JF1E4732T-A | C210 | CU3029 | Chip C. | C1608JBIH151JT-A |
| C29 | CU3009 | Chip C. | C1608JBIH090CT-A | C165 | CU3056 | Chip C. | C1608JF1E4732T-A | C211 | CU3027 | Chip C. | C1608JBIH223KT-A |
| C30 | CU3047 | Chip C. | C1608JBIH103KT-A | C166 | CU3031 | Chip C. | C1608JBIH471KT-A | C212 | CU3059 | Chip C. | C1608JF1E1042T-A |
| C31 | CU3047 | Chip C. | C1608JBIH103KT-A | C167 | CU3056 | Chip C. | C1608JF1E4732T-A | C213 | CS0372 | Chip Tantulum | TMCMB1C106MTR |
| C32 | CU3012 | Chip C. | C1608JBIH103KT-A | C168 | CU3031 | Chip C. | C1608JBIH471KT-A | C214 | CU3051 | Chip C. | C1608JBI223KT-A |
| C33 | CU3003 | Chip C. | C1608JBIH20JT-A | C169 | CU3056 | Chip C. | C1608JF1E4732T-A | C215 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C34 | CU3003 | Chip C. | C1608JBIH20JT-A | C170 | CU3027 | Chip C. | C1608JF1E4732T-A | C216 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C35 | CU3035 | Chip C. | C1608JBIH103KT-A | C171 | CU3056 | Chip C. | C1608JF1E4732T-A | C217 | CU3042 | Chip C. | C2012JBI104KT-A |
| C36 | CU3045 | Chip C. | C1608JBIH682KT-A | C172 | CU3056 | Chip C. | C1608JF1E4732T-A | C218 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C37 | CU3006 | Chip C. | C1608JBIH050CT-A | C173 | CU3035 | Chip C. | C1608JBIH103KT-A | C219 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C38 | CU3043 | Chip C. | C1608JBIH471KT-A | C174 | CU3051 | Chip C. | C1608JBIH223KT-A | C220 | CU3059 | Chip C. | C1608JF1E1042T-A |
| C39 | CS0232 | Chip Tantulum | TMCMB1V15MTR | C175 | CU3056 | Chip C. | C1608JF1E4732T-A | C221 | CS0372 | Chip Tantulum | TMCMB1C106MTR |
| C40 | CU3056 | Chip C. | C1608JF1E4732T-A | C176 | CU3056 | Chip C. | C1608JF1E4732T-A | C222 | CS0230 | Chip Tantulum | TMCMB1C106MTR |
| C41 | CU3031 | Chip C. | C1608JBIH471KT-A | C177 | CU3037 | Chip C. | C1608JBIH152KT-A | C223 | CS0372 | Chip Tantulum | TMCMB1C106MTR |
| C42 | CU3056 | Chip C. | C1608JF1E4732T-A | C178 | CU3047 | Chip C. | C1608JBIH103KT-A | C224 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C43 | CU3056 | Chip C. | C1608JF1E4732T-A | C179 | CU3056 | Chip C. | C1608JF1E4732T-A | C225 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C44 | CU3047 | Chip C. | C1608JBIH103KT-A | C180 | CS0372 | Chip Tantulum | TMCMB1C106MTR | C226 | CS0230 | Chip Tantulum | TMCMB1C106MTR |
| C45 | CU3047 | Chip C. | C1608JBIH103KT-A | C181 | CU3056 | Chip C. | C1608JF1E4732T-A | C227 | CS0225 | Chip Tantulum | TMCMB1D15MTR |
| C46 | CU3038 | Chip C. | C1608JF1E4732T-A | C182 | CU3051 | Chip C. | C1608JBIH223KT-A | C228 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C47 | CU3056 | Chip C. | C1608JF1E4732T-A | C183 | CU3056 | Chip C. | C1608JF1E4732T-A | C229 | CE0312 | Electrolytic C. | ECEVCA100R |
| C48 | CU3037 | Chip C. | C1608JBIH152KT-A | C184 | CU3056 | Chip C. | C1608JBIH471KT-A | C230 | CU3047 | Chip C. | C1608JBIH103KT-A |
| C49 | CU3038 | Chip C. | C1608JBIH152KT-A | C185 | CU3056 | Chip C. | C1608JF1E4732T-A | C231 | CE0315 | Electrolytic C. | ECEVCA470P |
| | | | | C186 | CU3056 | Chip C. | C1608JF1E4732T-A | C232 | CU3026 | Chip C. | C1608JBIH181JT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|-------------------|
| C233 | CU3043 | Chip C | C1608-B1H47KT-A |
| C234 | CU3038 | Chip C | C1608-B1H182KT-A |
| C236 | CU3059 | Chip C | C1608-JF1E042T-A |
| C237 | CU3059 | Chip C | C1608-JF1E042T-A |
| C238 | CU3067 | ChipTantalum | TMCMAUJ106MTR |
| C239 | CU3059 | Chip C | C1608-JF1E042T-A |
| C240 | CU8042 | Chip C | C2012-JB1C104KT-A |
| C241 | CU3037 | ChipTantalum | TMCMB1C106MTR |
| C242 | CU3047 | Chip C | C1608-B1H103KT-A |
| C243 | CU3101 | Chip C | C1608-B1C473KT-A |
| C244 | CU3037 | ChipTantalum | TMCMA1C335MTR |
| C245 | CU3037 | ChipTantalum | TMCMB1C106MTR |
| C246 | CU3041 | Chip C | C1608-B1H332KT-A |
| C247 | CU30230 | ChipTantalum | TMCMA1E105MTR |
| C248 | CU30230 | ChipTantalum | TMCMA1E105MTR |
| C249 | CU3101 | Chip C | C1608-B1C473KT-A |
| C250 | CU30220 | ChipTantalum | TMCMA1C225MTR |
| C251 | CU30220 | ChipTantalum | TMCMA1C225MTR |
| C252 | CU3047 | Chip C | C1608-B1H103KT-A |
| C253 | CU3056 | Chip C | C1608-JF1E4732T-A |
| C254 | CU3037 | ChipTantalum | TMCMB1C106MTR |
| C255 | CU3056 | Chip C | C1608-JF1E4732T-A |
| C256 | CU3102 | Chip C | C1608-B1C333KT-A |
| C257 | CU3029 | Chip C | C1608-B1H331KT-A |
| C258 | CU30229 | ChipTantalum | TMCMA1E68MTR |
| C259 | CU3051 | Chip C | C1608-B1E223KT-A |
| C260 | CU30315 | Electrolytic C | ECEVIC4470P |
| C261 | CU30352 | Electrolytic C | 16M3309C |
| C262 | CU8042 | Chip C | C2012-JB1C104KT-A |
| C263 | CU30353 | Electrolytic C | 16M470HC |
| C264 | CU30315 | Electrolytic C | ECEVIC4470P |
| C265 | CU30315 | Electrolytic C | ECEVIC4470P |
| C266 | CU30315 | Electrolytic C | ECEVIC4470P |
| C267 | CU3056 | Chip C | C1608-JF1E4732T-A |
| C268 | CU8042 | Chip C | C2012-JB1C104KT-A |
| C269 | CU30230 | ChipTantalum | TMCMA1E105MTR |
| C270 | CU3059 | Chip C | C1608-JF1E042T-A |
| C271 | CU3059 | Chip C | C1608-JF1E042T-A |
| C272 | CU3026 | Chip C | C1608-B1H181JT-A |
| C273 | CU3043 | Chip C | C1608-B1H47KT-A |
| C274 | CU3039 | Chip C | C1608-B1H222KT-A |
| C275 | CU3047 | Chip C | C1608-B1H103KT-A |
| C276 | CU3037 | ChipTantalum | TMCMB1C106MTR |
| C277 | CU3051 | Chip C | C1608-B1E223KT-A |
| C278 | CU8042 | Chip C | C2012-JB1C104KT-A |
| C279 | CU3047 | Chip C | C1608-B1H103KT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|-------------------|
| C280 | CU30230 | ChipTantalum | TMCMA1E105MTR |
| C281 | CU30315 | Electrolytic C | ECEVIC4470P |
| C282 | CU3032 | ChipTantalum | TMCMA1V474MTR |
| C283 | CU3047 | Chip C | C1608-B1H103KT-A |
| C284 | CU3027 | Chip C | C1608-B1H103KT-A |
| C285 | CU3027 | Chip C | C1608-B1H103KT-A |
| C286 | CU3027 | Chip C | C1608-B1H103KT-A |
| C287 | CU3027 | ChipTantalum | TMCMBUJ156MTR |
| C289 | CU3056 | Chip C | C1608-JF1E4732T-A |
| C290 | CU3047 | Chip C | C1608-B1H103KT-A |
| C291 | CU3047 | Chip C | C1608-B1H103KT-A |
| C292 | CU3047 | Chip C | C1608-B1H103KT-A |
| C293 | CU3047 | Chip C | C1608-B1H103KT-A |
| C294 | CU3059 | Chip C | C1608-JF1E1042T-A |
| C296 | CU3047 | Chip C | C1608-B1H103KT-A |
| C297 | CU3059 | Chip C | C1608-JF1E1042T-A |
| C298 | CU8042 | Chip C | C2012-JB1C104KT-A |
| C299 | CU3047 | Chip C | C1608-B1H103KT-A |
| C300 | CU3035 | Chip C | C1608-B1H102KT-A |
| C301 | CU3047 | Chip C | C1608-B1H103KT-A |
| C302 | CU3047 | Chip C | C1608-B1H103KT-A |
| C303 | CU3047 | Chip C | C1608-B1H103KT-A |
| C304 | CU3047 | Chip C | C1608-B1H103KT-A |
| C305 | CU3047 | Chip C | C1608-B1H103KT-A |
| C306 | CU3047 | Chip C | C1608-B1H103KT-A |
| C307 | CU3047 | Chip C | C1608-B1H103KT-A |
| C308 | CU3047 | Chip C | C1608-B1H103KT-A |
| C309 | CU3047 | Chip C | C1608-B1H103KT-A |
| C310 | CU3047 | Chip C | C1608-B1H103KT-A |
| C311 | CU3047 | Chip C | C1608-B1H103KT-A |
| C312 | CU3056 | Chip C | C1608-JF1E4732T-A |
| C313 | CU3047 | Chip C | C1608-B1H103KT-A |
| C314 | CU3047 | Chip C | C1608-B1H103KT-A |
| C315 | CU3027 | Chip C | C1608-B1H103KT-A |
| C316 | CU3027 | Chip C | C1608-B1H103KT-A |
| C317 | CU3027 | Chip C | C1608-B1H103KT-A |
| C318 | CU3027 | Chip C | C1608-B1H103KT-A |
| C319 | CU3027 | Chip C | C1608-B1H103KT-A |
| C320 | CU3027 | Chip C | C1608-B1H103KT-A |
| C321 | CU3027 | Chip C | C1608-B1H103KT-A |
| C322 | CU3027 | Chip C | C1608-B1H103KT-A |
| C323 | CU3047 | Chip C | C1608-B1H103KT-A |
| C324 | CU3059 | Chip C | C1608-JF1E1042T-A |
| C325 | CU30230 | ChipTantalum | TMCMA1E105MTR |
| C326 | CU3047 | Chip C | C1608-B1H103KT-A |
| C327 | CU3047 | Chip C | C1608-B1H103KT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|--------------|---------------------|
| C328 | CU3047 | Chip C | C1608-B1H103KT-A |
| C329 | CU3047 | Chip C | C1608-B1H103KT-A |
| C330 | CU3047 | Chip C | C1608-B1H103KT-A |
| C331 | CU3039 | Chip C | C1608-B1H222KT-A |
| C332 | CU3047 | Chip C | C1608-B1H103KT-A |
| C333 | CU3047 | Chip C | C1608-B1H103KT-A |
| C334 | CU3047 | Chip C | C1608-B1H103KT-A |
| C335 | CU3047 | Chip C | C1608-B1H103KT-A |
| C336 | CU3047 | Chip C | C1608-B1H103KT-A |
| C337 | CU3047 | Chip C | C1608-B1H103KT-A |
| C338 | CU3047 | Chip C | C1608-B1H103KT-A |
| C339 | CU3047 | Chip C | C1608-B1H103KT-A |
| C340 | CU3047 | Chip C | C1608-B1H103KT-A |
| C341 | CU3047 | Chip C | C1608-B1H103KT-A |
| C342 | CU3047 | Chip C | C1608-B1H103KT-A |
| C343 | CU3037 | ChipTantalum | TMCMB1C106MTR |
| C344 | CU3047 | Chip C | C1608-B1H103KT-A |
| C345 | CU3047 | Chip C | C1608-B1H652KT-A |
| C346 | CU3047 | Chip C | C1608-B1H103KT-A |
| C347 | CU3027 | Chip C | C1608-B1H221JT-A |
| C348 | CU8042 | Chip C | C2012-JB1C104KT-A |
| C349 | CU3056 | Chip C | C1608-JF1E4732T-A |
| C350 | CU3056 | Chip C | C1608-B1H102KT-A |
| C351 | CU3035 | Chip C | C1608-B1H103KT-A |
| C352 | CU3004 | Chip C | C1608-B1H030CT-A |
| C353 | CU3047 | Chip C | C1608-B1H103KT-A |
| CN1 | UE0235 | Connector | 00-5208-000-112-001 |
| CN2 | UE0043 | Connector | P122A02M |
| CN3 | UE0070 | Connector | P122A04M |
| CN4 | UE0071 | Connector | P122A05M |
| CN5 | UE0044 | Connector | P122A09M |
| CN6 | UE0259 | Connector | FFP025E-0201 |
| CN8 | UE0260 | Connector | 09P5-JE |
| CN11 | UE0043 | Connector | P122A02M |
| CN12 | UE0262 | Connector | 1MSA-91208-13 |
| CN13 | UE0262 | Connector | 1MSA-91208-13 |
| D1 | XD0272 | Diode | 1SS356 TM11 |
| D2 | XD0272 | Diode | 1SS356 TM11 |
| D4 | XD0266 | Diode | DAP23BU T106 |
| D5 | XD0254 | Diode | 1SS355 TE-17 |
| D6 | XD0246 | Diode | DAN235UT106 |
| D7 | XD0289 | Diode | S3275 (TE12L) |
| D8 | XD0246 | Diode | DAN235UT106 |
| D9 | XD0246 | Diode | DAN235UT106 |
| D10 | XD0231 | Diode | DAP202U T106 |
| D11 | XD0231 | Diode | DAP202U T106 |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| D29 | XD0246 | Diode | DAN235UT106 |
| D30 | XD0246 | Diode | DAN235UT106 |
| D33 | XD0234 | Diode | MA728 TX |
| D34 | XD0234 | Diode | MA728 TX |
| D37 | XD0272 | Diode | 1SS356 TM11 |
| D38 | XD0272 | Diode | 1SS356 TM11 |
| D39 | XD0272 | Diode | 1SS356 TM11 |
| D40 | XD0272 | Diode | 1SS356 TM11 |
| D41 | XD0272 | Diode | 1SS356 TM11 |
| D42 | XD0272 | Diode | 1SS356 TM11 |
| D43 | XD0272 | Diode | 1SS356 TM11 |
| D44 | XD0272 | Diode | 1SS356 TM11 |
| D45 | XD0272 | Diode | 1SS356 TM11 |
| D46 | XD0272 | Diode | 1SS356 TM11 |
| D47 | XD0272 | Diode | 1SS356 TM11 |
| D48 | XD0272 | Diode | 1SS356 TM11 |
| D49 | XD0246 | Diode | DAN235UT106 |
| D50 | XD0254 | Diode | 1SS355 TE-17 |
| D51 | XD0234 | Diode | MA728 TX |
| D52 | XD0272 | Diode | 1SS356 TM11 |
| D53 | XD0234 | Diode | MA728 TX |
| D54 | XD0234 | Diode | MA728 TX |
| D55 | XD0230 | Diode | DAN202U T106 |
| D56 | XD0230 | Diode | DAN202U T106 |
| D57 | XD0254 | Diode | 1SS355 TE-17 |
| D58 | XD0254 | Diode | 1SS355 TE-17 |
| D59 | XD0231 | Diode | DAP202U T106 |
| D60 | XD0254 | Diode | 1SS355 TE-17 |
| D62 | XD0254 | Diode | 1SS355 TE-17 |
| D63 | XD0231 | Diode | DAP202U T106 |
| D64 | XD0140 | Diode | D725.6C T111 |
| D65 | XD0254 | Diode | 1SS355 TE-17 |
| D66 | XD0254 | Diode | 1SS355 TE-17 |
| D67 | XD0231 | Diode | DAP202U T106 |
| D68 | XD0230 | Diode | DAN202U T106 |
| D69 | XD0254 | Diode | 1SS355 TE-17 |
| D70 | XD0254 | Diode | 1SS355 TE-17 |
| D71 | XD0231 | Diode | DAP202U T106 |
| D72 | XD0254 | Diode | 1SS355 TE-17 |
| D73 | XD0254 | Diode | 1SS355 TE-17 |
| D74 | XD0254 | Diode | 1SS355 TE-17 |
| D75 | XD0254 | Diode | 1SS355 TE-17 |
| D76 | XD0254 | Diode | 1SS355 TE-17 |
| D77 | XD0254 | Diode | 1SS355 TE-17 |
| D78 | XD0254 | Diode | 1SS355 TE-17 |
| D79 | XD0254 | Diode | 1SS355 TE-17 |

MAIN Unit

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|---------------|
| D80 | XD0230 | Diode | DAN202U T106 |
| D82 | XD0230 | Diode | DAN202U T106 |
| D83 | XD0254 | Diode | ISS3355 TE-17 |
| D84 | XD0254 | Diode | ISS3355 TE-17 |
| D85 | XD0254 | Diode | ISS3355 TE-17 |
| D86 | XD0231 | Diode | DAP202U T106 |
| D88 | XD0254 | Diode | ISS3355 TE-17 |
| D89 | XD0231 | Diode | DAN202U T106 |
| D90 | XD0230 | Diode | DAN202U T106 |
| D91 | XD0230 | Diode | DAN202U T106 |
| D92 | XD0254 | Diode | ISS3355 TE-17 |
| D93 | XD0231 | Diode | DAP202U T106 |
| D94 | XD0230 | Diode | DAN202U T106 |
| D95 | XD0231 | Diode | DAP202U T106 |
| D96 | XD0254 | Diode | ISS3355 TE-17 |
| D97 | XD0254 | Diode | ISS3355 TE-17 |
| D99 | XD0254 | Diode | ISS3355 TE-17 |
| D100 | XD0254 | Diode | ISS3355 TE-17 |
| D101 | XD0230 | Diode | DAN202U T106 |
| D102 | XD0230 | Diode | DAN202U T106 |
| D103 | XD0254 | Diode | ISS3355 TE-17 |
| D104 | XD0254 | Diode | ISS3355 TE-17 |
| D106 | XD0230 | Diode | DAN202U T106 |
| D107 | XD0254 | Diode | ISS3355 TE-17 |
| D108 | XD0230 | Diode | DAN202U T106 |
| D109 | XD0230 | Diode | DAN202U T106 |
| D110 | XD0254 | Diode | ISS3355 TE-17 |
| D111 | XD0254 | Diode | ISS3355 TE-17 |
| F81 | 0B0037 | Ferrite Beads | ZBF2530-00 |
| F1 | XF0017 | Crystal Filter | 71M15B4 UM1 |
| F2 | XC0012 | Ceramic Filter | CF-J455K8 |
| F3 | XC0011 | Ceramic Filter | CF-J455K5 |
| F4 | XC0017 | Ceramic Filter | CFM455G |
| F5 | XF0021 | Crystal Filter | 71M15A2 |
| I2 | XA0300 | IC | AN612 |
| I3 | XA0300 | IC | AN612 |
| I4 | XA0224 | IC | NLM2504M-T1 |
| I5 | XA0236 | IC | BU402BFC-T1 |
| I6 | XA0115 | IC | TC4556F-TE85L |
| I7 | XA0063 | IC | MC33370R |
| I8 | XA0224 | IC | NLM2504M-T1 |
| I9 | XA0299 | IC | BU4001BF |
| I10 | XA0082 | IC | NLM2504M-T1 |
| I11 | XA0082 | IC | MC7808CT |
| I12 | XA0068 | IC | MS218FP-T01-1 |
| I13 | XA0301 | IC | MS222FP |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| IC14 | XA0224 | IC | NLM2904M-T1 |
| IC15 | XA0246 | IC | BU4094BF-T1 |
| IC16 | XA0224 | IC | UPD6345GS-T1 |
| IC17 | XA0214 | IC | NLM2904M-T1 |
| IC18 | XA0299 | IC | BU4001BF |
| IC19 | XA0294 | IC | MC74HC390FL2 |
| IC20 | XA0079 | IC | MPC1241H |
| IC21 | XA0068 | IC | MS218FP-T01-1 |
| IC22 | XA0114 | IC | UPD6345GS-T1 |
| IC23 | XA0114 | IC | UPD6345GS-T1 |
| IC24 | XA0299 | IC | BU4001BF |
| J1 | UE0041 | Connector | TMP-J01X-V6 |
| J3 | UE0041 | Connector | TMP-J01X-V6 |
| J4 | UE0041 | Connector | MP-J01X-V6 |
| J5 | UE0041 | Connector | TMP-J01X-V6 |
| L2 | 0R0017 | Coil | 0R0017 |
| L3 | 0C0061 | Chip L | NL322522T-033J |
| L4 | 0C0126 | Chip L | NL322522T-R22J-3 |
| L5 | 0C0039 | Chip L | NL322522T-1R0J |
| L6 | 0C0127 | Chip L | NL322522T-R27J-3 |
| L7 | 0C0061 | Chip L | NL322522T-033J |
| L8 | 0R0017 | Coil | 0R0017 |
| L9 | 0A0108 | Coil | 0A0108 |
| L10 | 0A0107 | Coil | 0A0107 |
| L11 | 0A0107 | Coil | 0A0107 |
| L12 | 0A0107 | Coil | 0A0107 |
| L13 | 0A0107 | Coil | 0A0107 |
| L14 | 0R0017 | Coil | 0R0017 |
| L15 | 0C0039 | Chip L | NL322522T-1R0J |
| L16 | 0R0017 | Coil | 0R0017 |
| L17 | 0C0078 | Chip L | NL322522T-220J |
| L18 | 0A0119 | Coil | 0A0119 |
| L19 | 0C0074 | Chip L | NL322522T-8R2J |
| L20 | 0C0072 | Chip L | NL322522T-5R6J |
| L21 | 0C0493 | Chip L | LOH4N471J04 |
| L48 | 0C0493 | Chip L | LOH4N471J04 |
| L49 | 0C0493 | Chip L | LOH4N471J04 |
| L50 | 0C0493 | Chip L | LOH4N471J04 |
| L51 | 0R0017 | Coil | 0R0017 |
| L52 | 0C0124 | Chip L | NL322522T-R15J-3 |
| L53 | 0C0124 | Chip L | NL322522T-R15J-3 |
| L54 | 0C0124 | Chip L | NL322522T-R15J-3 |
| L55 | 0R0017 | Coil | 0R0017 |
| L56 | 0A0108 | Coil | 0A0108 |
| L57 | 0A0107 | Coil | 0A0107 |
| L58 | 0A0107 | Coil | 0A0107 |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| L59 | 0A0107 | Coil | 0A0107 |
| L60 | 0C0047 | Chip L | NL322522T-4R7J |
| L61 | 0C0062 | Chip L | NL322522T-039J |
| L62 | 0C0123 | Chip L | NL322522T-R12J-3 |
| L63 | 0A0119 | Coil | 0A0119 |
| L64 | 0A0119 | Coil | 0A0119 |
| L65 | 0A0119 | Coil | 0A0119 |
| L66 | 0A0119 | Coil | 0A0119 |
| L67 | 0C0493 | Chip L | LOH4N471J04 |
| L68 | 0A0119 | Coil | 0A0119 |
| L69 | 0A0119 | Coil | 0A0119 |
| L70 | 0C0048 | Chip L | NL322522T-100J |
| L71 | 0C0048 | Chip L | NL322522T-100J |
| L72 | 0C0039 | Chip L | NL322522T-1R0J |
| L73 | 0C0078 | Chip L | NL322522T-220J |
| L75 | 0C0040 | Chip L | NL322522T-1R2J |
| L76 | 0C0048 | Chip L | NL322522T-100J |
| L77 | 0C0086 | Chip L | NL322522T-101J |
| L80 | 0R0017 | Coil | 0R0017 |
| L81 | 0C0044 | Chip L | NL322522T-2R7J |
| 01 | XT0084 | Transistor | Z5C2954-T1 |
| 03 | XE0028 | FET | 35K131V12T1 |
| 04 | XE0028 | FET | 35K131V12T1 |
| 05 | XE0028 | FET | 35K131V12T1 |
| 06 | XU0061 | Transistor | UN5211-TX |
| 07 | XE0028 | FET | 35K131V12T1 |
| 08 | XE0026 | FET | 25K2171-4 |
| 09 | XE0026 | FET | 25K2171-4 |
| 010 | XE0026 | FET | 25K2171-4 |
| 011 | XE0026 | FET | 25K2171-4 |
| 012 | XE0028 | FET | 35K131V12T1 |
| 013 | XT0084 | Transistor | Z5C2954-T1 |
| 014 | XT0094 | Transistor | Z5A1576T106R |
| 015 | XU0095 | Transistor | Z5C4081T106R |
| 016 | XU0095 | Transistor | Z5C4081T106R |
| 018 | XU0095 | Transistor | Z5C4081T106R |
| 019 | XU0095 | Transistor | Z5C4081T106R |
| 020 | XE0028 | FET | FE35K131V12T1 |
| 021 | XU0078 | Transistor | UN5211-TX |
| 022 | XE0028 | FET | 35K131V12T1 |
| 023 | XE0028 | FET | 35K131V12T1 |
| 024 | XE0028 | FET | 35K131V12T1 |
| 025 | XU0095 | Transistor | Z5C4081T106R |
| 026 | XU0095 | Transistor | Z5C4081T106R |
| 027 | XU0148 | Transistor | DTC144EUT106 |
| 028 | XU0095 | Transistor | Z5C4081T106R |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|----------------|
| Q29 | XU0148 | Transistor | DTC144EUT106 |
| Q30 | XT0094 | Transistor | Z5A1576T106R |
| Q31 | XT0095 | Transistor | Z5C4081T106R |
| Q32 | XU0061 | Transistor | UN5211-TX |
| Q33 | XT0136 | Transistor | Z5D1664 |
| Q34 | XU0061 | Transistor | UN5211-TX |
| Q35 | XT0136 | Transistor | Z5D1664 |
| Q36 | XU0148 | Transistor | DTC144EUT106 |
| Q37 | XT0095 | Transistor | Z5C4081T106R |
| Q38 | XU0148 | Transistor | DTC144EUT106 |
| Q39 | XT0095 | Transistor | Z5C4081T106R |
| Q40 | XU0051 | Transistor | UN511F-TX |
| Q41 | XU0049 | Transistor | UMA9TR |
| Q42 | XU0049 | Transistor | UMA9TR |
| Q43 | XU0049 | Transistor | UMA9TR |
| Q44 | XU0049 | Transistor | UMA9TR |
| Q45 | XU0047 | Transistor | UMC3TR |
| Q46 | XU0061 | Transistor | UN5211-TX |
| Q47 | XT0095 | Transistor | Z5C4081T106R |
| Q48 | XU0148 | Transistor | DTC144EUT106 |
| Q49 | XT0094 | Transistor | Z5A1576T106R |
| Q50 | XT0095 | Transistor | Z5C4081T106R |
| Q51 | XT0127 | Transistor | Z5C3419-Y |
| Q52 | XU0061 | Transistor | UN5211-TX |
| Q53 | XU0061 | Transistor | UN5211-TX |
| Q54 | XT0095 | Transistor | Z5C4081T106R |
| Q55 | XU0148 | Transistor | DTC144EUT106 |
| Q56 | XT0111 | Transistor | Z5C4081LNT106S |
| Q57 | XU0116 | Transistor | DTA123EUT106 |
| Q58 | XU0112 | Transistor | DTA114YUT106 |
| Q59 | XU0112 | Transistor | DTA114YUT106 |
| Q60 | XT0095 | Transistor | Z5C4081T106R |
| Q61 | XU0047 | Transistor | UMC3TR |
| Q62 | XU0061 | Transistor | UN5211-TX |
| Q63 | XU0148 | Transistor | DTC144EUT106 |
| Q64 | XT0029 | Transistor | DTA114YUT106 |
| Q65 | XU0148 | Transistor | DTC144EUT106 |
| Q66 | XU0061 | Transistor | UN5211-TX |
| R1 | RK3026 | Chip R | ERJ3GSJ010V |
| R2 | RK3013 | Chip R | ERJ3GSJ082V |
| R3 | RK3038 | Chip R | ERJ3GSJ102V |
| R4 | RK3042 | Chip R | ERJ3GSJ222V |
| R5 | RK3032 | Chip R | ERJ3GSJ0331V |
| R7 | RK3038 | Chip R | ERJ3GSJ102V |
| R8 | RK3037 | Chip R | ERJ3GSJ0821V |
| R9 | RK3030 | Chip R | ERJ3GSJ221V |

MAIN Unit

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R10 | RK3034 | Chip R | ERJ3GSYJ471V |
| R11 | RK3035 | Chip R | ERJ3GSYJ561V |
| R12 | RK3042 | Chip R | ERJ3GSYJ222V |
| R13 | RK3018 | Chip R | ERJ3GSYJ222V |
| R14 | RK3030 | Chip R | ERJ3GSYJ221V |
| R15 | RK3049 | Chip R | ERJ3GSYJ822V |
| R16 | RK3043 | Chip R | ERJ3GSYJ272V |
| R17 | RK3038 | Chip R | ERJ3GSYJ102V |
| R18 | RK3040 | Chip R | ERJ3GSYJ152V |
| R19 | RK3050 | Chip R | ERJ3GSYJ103V |
| R20 | RK3026 | Chip R | ERJ3GSYJ101V |
| R21 | RK3034 | Chip R | ERJ3GSYJ471V |
| R22 | RK3026 | Chip R | ERJ3GSYJ101V |
| R23 | RK3030 | Chip R | ERJ3GSYJ102V |
| R25 | RK3042 | Chip R | ERJ3GSYJ222V |
| R26 | RK3046 | Chip R | ERJ3GSYJ472V |
| R28 | RK3038 | Chip R | ERJ3GSYJ102V |
| R29 | RK3038 | Chip R | ERJ3GSYJ102V |
| R30 | RK3026 | Chip R | ERJ3GSYJ101V |
| R31 | RK3034 | Chip R | ERJ3GSYJ471V |
| R32 | RK3066 | Chip R | ERJ3GSYJ224V |
| R33 | RK3026 | Chip R | ERJ3GSYJ101V |
| R34 | RK3058 | Chip R | ERJ3GSYJ473V |
| R35 | RK3050 | Chip R | ERJ3GSYJ103V |
| R36 | RK3030 | Chip R | ERJ3GSYJ221V |
| R37 | RK3023 | Chip R | ERJ3GSYJ560V |
| R38 | RK1025 | Chip R | ERJ3GSYJ331V |
| R57 | RK3031 | Chip R | ERJ3GSYJ271V |
| R58 | RK3018 | Chip R | ERJ3GSYJ220V |
| R59 | RK3024 | Chip R | ERJ3GSYJ880V |
| R60 | RK4068 | Chip R | ERJ3GSYJ51H |
| R61 | RK3050 | Chip R | ERJ3GSYJ103V |
| R62 | RK4088 | Chip R | ERJ3GSYJ561V |
| R63 | RK3035 | Chip R | ERJ3GSYJ561V |
| R64 | RK3034 | Chip R | ERJ3GSYJ471V |
| R65 | RK3022 | Chip R | ERJ3GSYJ470V |
| R66 | RK3054 | Chip R | ERJ3GSYJ223V |
| R67 | RK3074 | Chip R | ERJ3GSYJ105V |
| R68 | RK3026 | Chip R | ERJ3GSYJ101V |
| R69 | RK3034 | Chip R | ERJ3GSYJ471V |
| R70 | RK3043 | Chip R | ERJ3GSYJ272V |
| R71 | RK3026 | Chip R | ERJ3GSYJ101V |
| R72 | RK3044 | Chip R | ERJ3GSYJ332V |
| R73 | RK3032 | Chip R | ERJ3GSYJ331V |
| R74 | RK3044 | Chip R | ERJ3GSYJ332V |
| R75 | RK3038 | Chip R | ERJ3GSYJ102V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R76 | RK3013 | Chip R | ERJ3GSYJ882V |
| R77 | RK3020 | Chip R | ERJ3GSYJ330V |
| R78 | RK3040 | Chip R | ERJ3GSYJ152V |
| R79 | RK3022 | Chip R | ERJ3GSYJ470V |
| R80 | RK3030 | Chip R | ERJ3GSYJ221V |
| R81 | RK3058 | Chip R | ERJ3GSYJ473V |
| R82 | RK3052 | Chip R | ERJ3GSYJ153V |
| R83 | RK3038 | Chip R | ERJ3GSYJ102V |
| R84 | RK3032 | Chip R | ERJ3GSYJ103V |
| R85 | RK3050 | Chip R | ERJ3GSYJ101V |
| R86 | RK3042 | Chip R | ERJ3GSYJ222V |
| R87 | RK3042 | Chip R | ERJ3GSYJ103V |
| R88 | RK3050 | Chip R | ERJ3GSYJ103V |
| R89 | RK3042 | Chip R | ERJ3GSYJ222V |
| R90 | RK3042 | Chip R | ERJ3GSYJ104V |
| R91 | RK3054 | Chip R | ERJ3GSYJ223V |
| R92 | RK3026 | Chip R | ERJ3GSYJ101V |
| R93 | RK3022 | Chip R | ERJ3GSYJ470V |
| R94 | RK3034 | Chip R | ERJ3GSYJ471V |
| R95 | RK3078 | Chip R | ERJ3GSYJ225V |
| R96 | RK3043 | Chip R | ERJ3GSYJ272V |
| R97 | RK3058 | Chip R | ERJ3GSYJ473V |
| R98 | RK3038 | Chip R | ERJ3GSYJ102V |
| R99 | RK3042 | Chip R | ERJ3GSYJ222V |
| R100 | RK3070 | Chip R | ERJ3GSYJ474V |
| R101 | RK3026 | Chip R | ERJ3GSYJ101V |
| R102 | RK3034 | Chip R | ERJ3GSYJ103V |
| R103 | RK3050 | Chip R | ERJ3GSYJ101V |
| R104 | RK3026 | Chip R | ERJ3GSYJ103V |
| R105 | RK3050 | Chip R | ERJ3GSYJ103V |
| R106 | RK3051 | Chip R | ERJ3GSYJ123V |
| R107 | RK3034 | Chip R | ERJ3GSYJ471V |
| R108 | RK3046 | Chip R | ERJ3GSYJ472V |
| R109 | RK3046 | Chip R | ERJ3GSYJ392V |
| R110 | RK3045 | Chip R | ERJ3GSYJ103V |
| R111 | RK3050 | Chip R | ERJ3GSYJ103V |
| R112 | RK3030 | Chip R | ERJ3GSYJ223V |
| R113 | RK3030 | Chip R | ERJ3GSYJ221V |
| R114 | RK3030 | Chip R | ERJ3GSYJ221V |
| R115 | RK3042 | Chip R | ERJ3GSYJ222V |
| R116 | RK3046 | Chip R | ERJ3GSYJ472V |
| R117 | RK3046 | Chip R | ERJ3GSYJ472V |
| R118 | RK3046 | Chip R | ERJ3GSYJ472V |
| R119 | RK3030 | Chip R | ERJ3GSYJ221V |
| R120 | RK3030 | Chip R | ERJ3GSYJ221V |
| R121 | RK3030 | Chip R | ERJ3GSYJ221V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R122 | RK3051 | Chip R | ERJ3GSYJ123V |
| R123 | RK3050 | Chip R | ERJ3GSYJ103V |
| R124 | RK3050 | Chip R | ERJ3GSYJ103V |
| R125 | RK3058 | Chip R | ERJ3GSYJ473V |
| R126 | RK3026 | Chip R | ERJ3GSYJ101V |
| R127 | RK3026 | Chip R | ERJ3GSYJ101V |
| R128 | RK3034 | Chip R | ERJ3GSYJ471V |
| R130 | RK3050 | Chip R | ERJ3GSYJ103V |
| R131 | RK3026 | Chip R | ERJ3GSYJ101V |
| R132 | RK3054 | Chip R | ERJ3GSYJ223V |
| R133 | RK3026 | Chip R | ERJ3GSYJ101V |
| R134 | RK3058 | Chip R | ERJ3GSYJ473V |
| R135 | RK3059 | Chip R | ERJ3GSYJ563V |
| R136 | RK3042 | Chip R | ERJ3GSYJ222V |
| R137 | RK3042 | Chip R | ERJ3GSYJ222V |
| R138 | RK3032 | Chip R | ERJ3GSYJ331V |
| R139 | RK3070 | Chip R | ERJ3GSYJ474V |
| R140 | RK3047 | Chip R | ERJ3GSYJ562V |
| R141 | RK3062 | Chip R | ERJ3GSYJ104V |
| R142 | RK3038 | Chip R | ERJ3GSYJ102V |
| R143 | RK3042 | Chip R | ERJ3GSYJ222V |
| R144 | RK3026 | Chip R | ERJ3GSYJ101V |
| R145 | RK3058 | Chip R | ERJ3GSYJ473V |
| R146 | RK3074 | Chip R | ERJ3GSYJ105V |
| R147 | RK3038 | Chip R | ERJ3GSYJ102V |
| R148 | RK3038 | Chip R | ERJ3GSYJ102V |
| R149 | RK3045 | Chip R | ERJ3GSYJ392V |
| R150 | RK3026 | Chip R | ERJ3GSYJ101V |
| R151 | RK3050 | Chip R | ERJ3GSYJ103V |
| R152 | RK3048 | Chip R | ERJ3GSYJ882V |
| R153 | RK3052 | Chip R | ERJ3GSYJ153V |
| R154 | RK3044 | Chip R | ERJ3GSYJ332V |
| R155 | RK3068 | Chip R | ERJ3GSYJ334V |
| R156 | RK3050 | Chip R | ERJ3GSYJ103V |
| R157 | RK3058 | Chip R | ERJ3GSYJ473V |
| R158 | RK3051 | Chip R | ERJ3GSYJ123V |
| R159 | RK3058 | Chip R | ERJ3GSYJ473V |
| R160 | RK3050 | Chip R | ERJ3GSYJ103V |
| R161 | RK3058 | Chip R | ERJ3GSYJ473V |
| R162 | RK3030 | Chip R | ERJ3GSYJ221V |
| R163 | RK3050 | Chip R | ERJ3GSYJ103V |
| R164 | RK3062 | Chip R | ERJ3GSYJ104V |
| R165 | RK3046 | Chip R | ERJ3GSYJ472V |
| R166 | RK3050 | Chip R | ERJ3GSYJ103V |
| R167 | RK3034 | Chip R | ERJ3GSYJ471V |
| R168 | RK3076 | Chip R | ERJ3GSYJ155V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|---------------|
| R169 | RK3062 | Chip R | ERJ3GSYJ104V |
| R170 | RK3058 | Chip R | ERJ3GSYJ473V |
| R171 | RK3038 | Chip R | ERJ3GSYJ102V |
| R172 | RK3050 | Chip R | ERJ3GSYJ103V |
| R173 | RK3058 | Chip R | ERJ3GSYJ473V |
| R174 | RK3001 | Chip R | ERJ3GSYJ0R00V |
| R175 | RK3044 | Chip R | ERJ3GSYJ332V |
| R176 | RK3046 | Chip R | ERJ3GSYJ682V |
| R177 | RK3044 | Chip R | ERJ3GSYJ332V |
| R178 | RK3058 | Chip R | ERJ3GSYJ473V |
| R179 | RK3050 | Chip R | ERJ3GSYJ103V |
| R180 | RK3049 | Chip R | ERJ3GSYJ822V |
| R181 | RK3026 | Chip R | ERJ3GSYJ101V |
| R182 | RK3054 | Chip R | ERJ3GSYJ223V |
| R183 | RK3050 | Chip R | ERJ3GSYJ103V |
| R184 | RK3050 | Chip R | ERJ3GSYJ103V |
| R185 | RK3050 | Chip R | ERJ3GSYJ103V |
| R186 | RK3058 | Chip R | ERJ3GSYJ473V |
| R187 | RK3060 | Chip R | ERJ3GSYJ103V |
| R188 | RK3062 | Chip R | ERJ3GSYJ104V |
| R189 | RK3062 | Chip R | ERJ3GSYJ104V |
| R190 | RK3062 | Chip R | ERJ3GSYJ104V |
| R191 | RK3059 | Chip R | ERJ3GSYJ563V |
| R192 | RK3058 | Chip R | ERJ3GSYJ473V |
| R193 | RK3058 | Chip R | ERJ3GSYJ473V |
| R194 | RK3056 | Chip R | ERJ3GSYJ333V |
| R195 | RK3064 | Chip R | ERJ3GSYJ154V |
| R196 | RK3054 | Chip R | ERJ3GSYJ223V |
| R197 | RK3056 | Chip R | ERJ3GSYJ333V |
| R198 | RK3074 | Chip R | ERJ3GSYJ105V |
| R199 | RK3058 | Chip R | ERJ3GSYJ473V |
| R200 | RK3068 | Chip R | ERJ3GSYJ334V |
| R201 | RK3067 | Chip R | ERJ3GSYJ274V |
| R202 | RK3068 | Chip R | ERJ3GSYJ334V |
| R203 | RK3042 | Chip R | ERJ3GSYJ222V |
| R204 | RK3074 | Chip R | ERJ3GSYJ105V |
| R205 | RK3034 | Chip R | ERJ3GSYJ471V |
| R206 | RK3051 | Chip R | ERJ3GSYJ123V |
| R209 | RK3032 | Chip R | ERJ3GSYJ331V |
| R212 | RK3045 | Chip R | ERJ3GSYJ92V |
| R213 | RK3046 | Chip R | ERJ3GSYJ472V |
| R214 | RK3049 | Chip R | ERJ3GSYJ822V |
| R215 | RK3074 | Chip R | ERJ3GSYJ105V |
| R216 | RK3074 | Chip R | ERJ3GSYJ105V |
| R217 | RK3062 | Chip R | ERJ3GSYJ104V |
| R218 | RK3075 | Chip R | ERJ3GSYJ125V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R215 | RK3074 | Chip R | ERJ3GSYJ105V |
| R216 | RK3074 | Chip R | ERJ3GSYJ105V |
| R217 | RK3070 | Chip R | ERJ3GSYJ183V |
| R218 | RK3047 | Chip R | ERJ3GSYJ562V |
| R219 | RK3034 | Chip R | ERJ3GSYJ103V |
| R220 | RK3050 | Chip R | ERJ3GSYJ221V |
| R221 | RK3049 | Chip R | ERJ3GSYJ822V |
| R222 | RK3070 | Chip R | ERJ3GSYJ474V |
| R223 | RK3070 | Chip R | ERJ3GSYJ474V |
| R224 | RK3070 | Chip R | ERJ3GSYJ474V |
| R225 | RK3070 | Chip R | ERJ3GSYJ474V |
| R226 | RK4082 | Chip R | ERJ14TK4R7H |
| R227 | RK1035 | Chip R | ERJ14TK4R7H |
| R228 | RK1035 | Chip R | ERJ14TK4R7H |
| R229 | RK3054 | Chip R | ERJ3GSYJ223V |
| R230 | RK3058 | Chip R | ERJ3GSYJ473V |
| R231 | RK3058 | Chip R | ERJ3GSYJ103V |
| R232 | RK3001 | Chip R | ERJ3GSYJ933V |
| R233 | RK3057 | Chip R | ERJ3GSYJ933V |
| R234 | RK3057 | Chip R | ERJ3GSYJ933V |
| R235 | RK3052 | Chip R | ERJ3GSYJ104V |
| R236 | RK3042 | Chip R | ERJ3GSYJ222V |
| R237 | RK3053 | Chip R | ERJ3GSYJ183V |
| R238 | RK3050 | Chip R | ERJ3GSYJ683V |
| R239 | RK3050 | Chip R | ERJ3GSYJ103V |
| R240 | RK3052 | Chip R | ERJ3GSYJ104V |
| R241 | RK3056 | Chip R | ERJ3GSYJ333V |
| R242 | RK3054 | Chip R | ERJ3GSYJ223V |
| R243 | RK3052 | Chip R | ERJ3GSYJ104V |
| R244 | RK3056 | Chip R | ERJ3GSYJ683V |
| R245 | RK3056 | Chip R | ERJ3GSYJ333V |
| R246 | RK3054 | Chip R | ERJ3GSYJ223V |
| R247 | RK3052 | Chip R | ERJ3GSYJ104V |
| R248 | RK3050 | Chip R | ERJ3GSYJ103V |
| R249 | RK3050 | Chip R | ERJ3GSYJ104V |
| R250 | RK3046 | Chip R | ERJ3GSYJ472V |
| R251 | RK3052 | Chip R | ERJ3GSYJ104V |
| R252 | RK3050 | Chip R | ERJ3GSYJ103V |
| R253 | RK3026 | Chip R | ERJ3GSYJ101V |
| R254 | RK3069 | Chip R | ERJ3GSYJ394V |
| R255 | RK3071 | Chip R | ERJ3GSYJ564V |
| R256 | RK3074 | Chip R | ERJ3GSYJ105V |
| R257 | RK3041 | Chip R | ERJ3GSYJ182V |
| R258 | RK3052 | Chip R | ERJ3GSYJ153V |
| R259 | RK3050 | Chip R | ERJ3GSYJ683V |
| R260 | RK3051 | Chip R | ERJ3GSYJ123V |
| R261 | RK3038 | Chip R | ERJ3GSYJ102V |
| R262 | RK3034 | Chip R | ERJ3GSYJ471V |
| R263 | RK3034 | Chip R | ERJ3GSYJ471V |
| R264 | RK3034 | Chip R | ERJ3GSYJ471V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R265 | RK3058 | Chip R | ERJ3GSYJ473V |
| R266 | RK3034 | Chip R | ERJ3GSYJ471V |
| R267 | RK3053 | Chip R | ERJ3GSYJ183V |
| R268 | RK3034 | Chip R | ERJ3GSYJ471V |
| R269 | RK3058 | Chip R | ERJ3GSYJ473V |
| R270 | RK3054 | Chip R | ERJ3GSYJ223V |
| R271 | RK3074 | Chip R | ERJ3GSYJ105V |
| R272 | RK3050 | Chip R | ERJ3GSYJ103V |
| R273 | RK3054 | Chip R | ERJ3GSYJ223V |
| R274 | RK3070 | Chip R | ERJ3GSYJ474V |
| R275 | RK3062 | Chip R | ERJ3GSYJ104V |
| R276 | RK3070 | Chip R | ERJ3GSYJ474V |
| R277 | RK3058 | Chip R | ERJ3GSYJ473V |
| R278 | RK3058 | Chip R | ERJ3GSYJ473V |
| R279 | RK3058 | Chip R | ERJ3GSYJ473V |
| R280 | RK3080 | Chip R | ERJ3GSYJ335V |
| R281 | RK3080 | Chip R | ERJ3GSYJ335V |
| R282 | RK3074 | Chip R | ERJ3GSYJ105V |
| R283 | RK3067 | Chip R | ERJ3GSYJ274V |
| R284 | RK3050 | Chip R | ERJ3GSYJ103V |
| R285 | RK3042 | Chip R | ERJ3GSYJ222V |
| R286 | RK3074 | Chip R | ERJ3GSYJ105V |
| R287 | RK3035 | Chip R | ERJ3GSYJ561V |
| R288 | RK3048 | Chip R | ERJ3GSYJ682V |
| R289 | RK3050 | Chip R | ERJ3GSYJ103V |
| R290 | RK3026 | Chip R | ERJ3GSYJ101V |
| R291 | RK3038 | Chip R | ERJ3GSYJ102V |
| R292 | RK3058 | Chip R | ERJ3GSYJ473V |
| R293 | RK3054 | Chip R | ERJ3GSYJ992V |
| R294 | RK3040 | Chip R | ERJ3GSYJ223V |
| R295 | RK3030 | Chip R | ERJ3GSYJ103V |
| R296 | RK3050 | Chip R | ERJ3GSYJ103V |
| R297 | RK3050 | Chip R | ERJ3GSYJ103V |
| R298 | RK3057 | Chip R | ERJ3GSYJ393V |
| R299 | RK3057 | Chip R | ERJ3GSYJ473V |
| R300 | RK3050 | Chip R | ERJ3GSYJ103V |
| R301 | RK3050 | Chip R | ERJ3GSYJ103V |
| R302 | RK3045 | Chip R | ERJ3GSYJ392V |
| R303 | RK3070 | Chip R | ERJ3GSYJ474V |
| R304 | RK10022 | Chip R | ERJ6GEYJ221V |
| R305 | RK10114 | Chip R | ERJ6GEYJ010V |
| R306 | RK3026 | Chip R | ERJ3GSYJ101V |
| R307 | RK3001 | Chip R | ERJ3GSYJ933V |
| R308 | RK3048 | Chip R | ERJ3GSYJ682V |
| R309 | RK3032 | Chip R | ERJ3GSYJ331V |
| R310 | RK3032 | Chip R | ERJ3GSYJ331V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R311 | RK3074 | Chip R | ERJ3GSYJ105V |
| R312 | RK3050 | Chip R | ERJ3GSYJ103V |
| R313 | RK3050 | Chip R | ERJ3GSYJ103V |
| R314 | RK3058 | Chip R | ERJ3GSYJ473V |
| R315 | RK3058 | Chip R | ERJ3GSYJ473V |
| R316 | RK3058 | Chip R | ERJ3GSYJ473V |
| R317 | RK3038 | Chip R | ERJ3GSYJ102V |
| R318 | RK3046 | Chip R | ERJ3GSYJ472V |
| R319 | RK3054 | Chip R | ERJ3GSYJ223V |
| R320 | RK3038 | Chip R | ERJ3GSYJ102V |
| R321 | RK3057 | Chip R | ERJ3GSYJ933V |
| R322 | RK3057 | Chip R | ERJ3GSYJ933V |
| R323 | RK3056 | Chip R | ERJ3GSYJ333V |
| R324 | RK3038 | Chip R | ERJ3GSYJ102V |
| R325 | RK3050 | Chip R | ERJ3GSYJ103V |
| R326 | RK3050 | Chip R | ERJ3GSYJ103V |
| R327 | RK3064 | Chip R | ERJ3GSYJ154V |
| R328 | RK3072 | Chip R | ERJ3GSYJ684V |
| R329 | RK3062 | Chip R | ERJ3GSYJ104V |
| R330 | RK3042 | Chip R | ERJ3GSYJ222V |
| R331 | RK3062 | Chip R | ERJ3GSYJ104V |
| R332 | RK3054 | Chip R | ERJ3GSYJ223V |
| R333 | RK3055 | Chip R | ERJ3GSYJ273V |
| R334 | RK3038 | Chip R | ERJ3GSYJ102V |
| R335 | RK3026 | Chip R | ERJ3GSYJ01V |
| R336 | RK3066 | Chip R | ERJ3GSYJ224V |
| R337 | RK3038 | Chip R | ERJ3GSYJ102V |
| R338 | RK3026 | Chip R | ERJ3GSYJ01V |
| R339 | RK3042 | Chip R | ERJ3GSYJ223V |
| R340 | RK3042 | Chip R | ERJ3GSYJ222V |
| R341 | RK3034 | Chip R | ERJ3GSYJ471V |
| R342 | RK3034 | Chip R | ERJ3GSYJ471V |
| R343 | RK3050 | Chip R | ERJ3GSYJ103V |
| R344 | RK1035 | Chip R | ERJ6GEYJ102V |
| R345 | RK3034 | Chip R | ERJ3GSYJ471V |
| R346 | RK3034 | Chip R | ERJ3GSYJ471V |
| R347 | RK3034 | Chip R | ERJ3GSYJ471V |
| R348 | RK3050 | Chip R | ERJ3GSYJ103V |
| R349 | RK3046 | Chip R | ERJ3GSYJ472V |
| R350 | RK3050 | Chip R | ERJ3GSYJ103V |
| R351 | RK3033 | Chip R | ERJ3GSYJ391V |
| R352 | RK3015 | Chip R | ERJ3GSYJ120V |
| R353 | RK3024 | Chip R | ERJ3GSYJ680V |
| R354 | RK3033 | Chip R | ERJ3GSYJ391V |
| R355 | RK3064 | Chip R | ERJ3GSYJ154V |
| R356 | RK3046 | Chip R | ERJ3GSYJ472V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R357 | RK3030 | Chip R | ERJ3GSYJ221V |
| R358 | RK3045 | Chip R | ERJ3GSYJ392V |
| R359 | RK3030 | Chip R | ERJ3GSYJ221V |
| R360 | RK3066 | Chip R | ERJ3GSYJ224V |
| R361 | RK0020 | Chip R | ERJ6GEYJ151V |
| R362 | RK3018 | Chip R | ERJ3GSYJ220V |
| R363 | RK3018 | Chip R | ERJ3GSYJ682V |
| R364 | RK3048 | Chip R | ERJ3GSYJ222V |
| R365 | RK3042 | Chip R | ERJ3GSYJ222V |
| R366 | RK3040 | Chip R | ERJ3GSYJ152V |
| R367 | RK3001 | Chip R | ERJ3GSYJ933V |
| R368 | RK3050 | Chip R | ERJ3GSYJ103V |
| R369 | RK3050 | Chip R | ERJ3GSYJ103V |
| R370 | RK3050 | Chip R | ERJ3GSYJ103V |
| R371 | RK3050 | Chip R | ERJ3GSYJ103V |
| R372 | RK3050 | Chip R | ERJ3GSYJ103V |
| R373 | RK3050 | Chip R | ERJ3GSYJ103V |
| R374 | RK3050 | Chip R | ERJ3GSYJ103V |
| R375 | RK3050 | Chip R | ERJ3GSYJ103V |
| R376 | RK3050 | Chip R | ERJ3GSYJ103V |
| R377 | RK3064 | Chip R | ERJ3GSYJ154V |
| R378 | RK3050 | Chip R | ERJ3GSYJ103V |
| R379 | RK3050 | Chip R | ERJ3GSYJ103V |
| R380 | RK3058 | Chip R | ERJ3GSYJ473V |
| R381 | RK3050 | Chip R | ERJ3GSYJ103V |
| R382 | RK3050 | Chip R | ERJ3GSYJ103V |
| R383 | RK3053 | Chip R | ERJ3GSYJ183V |
| R384 | RK3054 | Chip R | ERJ3GSYJ223V |
| R385 | RK3047 | Chip R | ERJ3GSYJ562V |
| R386 | RK3026 | Chip R | ERJ3GSYJ101V |
| R388 | RK3034 | Chip R | ERJ3GSYJ471V |
| R389 | RK3034 | Chip R | ERJ3GSYJ471V |
| R390 | RK3053 | Chip R | ERJ3GSYJ183V |
| R391 | RK3064 | Chip R | ERJ3GSYJ154V |
| R392 | RK3050 | Chip R | ERJ3GSYJ103V |
| R393 | RK3042 | Chip R | ERJ3GSYJ222V |
| R394 | RK3058 | Chip R | ERJ3GSYJ473V |
| R395 | RK3066 | Chip R | ERJ3GSYJ224V |
| R396 | RK3042 | Chip R | ERJ3GSYJ222V |
| R397 | RK1023 | Chip R | ERJ6GEYJ221V |
| R398 | RK3054 | Chip R | ERJ3GSYJ223V |
| R399 | RK3054 | Chip R | ERJ3GSYJ223V |
| R400 | RK3054 | Chip R | ERJ3GSYJ223V |
| R401 | RK3054 | Chip R | ERJ3GSYJ223V |
| R402 | RK3054 | Chip R | ERJ3GSYJ223V |
| R404 | RK3062 | Chip R | ERJ3GSYJ104V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| R405 | RK3049 | Chip R. | ERJ3GSJ822V |
| R406 | RK3049 | Chip R. | ERJ3GSJ822V |
| R407 | RK3046 | Chip R. | ERJ3GSJ472V |
| R408 | RK3054 | Chip R. | ERJ3GSJ223V |
| R409 | RK3014 | Chip R. | ERJ3GSJ100V |
| R411 | RK3027 | Chip R. | ERJ3GSJ121V |
| S1 | US0012 | Switch | SSSS212A NS L-2 |
| TH1 | X50019 | Thermistor | TBPS1RAT2K440H50 |
| TH2 | X50017 | Thermistor | TBPS1RZ2K410H50 |
| VR1 | RH0115 | Trim Pot | EWIYS450812 |
| VR2 | RH0101 | Trim Pot | EWIYS450803 |
| VR3 | RH0103 | Trim Pot | EWIYS450814 |
| VR4 | RH0103 | Trim Pot | EWIYS450814 |
| VR5 | RH0111 | Trim Pot | EWIYS450805 |
| VR6 | RH0103 | Trim Pot | EWIYS450814 |
| VR7 | RH0108 | Trim Pot | EWIYS450815 |
| VR8 | RH0111 | Trim Pot | EWIYS450815 |
| VR9 | RH0108 | Trim Pot | EWIYS450815 |
| VR10 | RH0099 | Trim Pot | EWIYS4508E3 |
| VR11 | RH0099 | Trim Pot | EWIYS4508E3 |
| VR12 | RH0099 | Trim Pot | EWIYS4508E3 |
| VR13 | RH0103 | Trim Pot | EWIYS450814 |
| VR14 | RH0103 | Trim Pot | EWIYS450814 |
| VR15 | RH0113 | Trim Pot | EWIYS450816 |
| X1 | XK0001 | Filter | CD8455C7 |
| T20049 | UM-1 | | |
| T20049 | UM-1 | | |
| T20049 | UM-1 | | |
| JP0288B | | P. C B | Circuit Board B |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| C54 | CU3059 | Chip C. | C1608JF1E04ZT-A |
| C55 | CU3023 | Chip C. | C1608CH1H101JT-A |
| C56 | CU3035 | Chip C. | C1608JH102KT-A |
| C57 | CU3035 | Chip C. | C1608JF1E473ZT-A |
| C58 | CU3059 | Chip C. | C1608JF1E104ZT-A |
| C73 | CU3025 | Chip C. | C1608CH1H15JT-A |
| C74 | CU3034 | Chip C. | C1608JH182KT-A |
| C75 | CU3034 | Chip C. | C1608JH182KT-A |
| C76 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C77 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| D12 | X00266 | Diode | DAP236U T106 |
| D13 | X00272 | Diode | 1SS356 TM11 |
| L22 | OC0079 | Chip L. | NL322522T-270J |
| L23 | OC0078 | Chip L. | NL322522T-220J |
| L33 | OC0043 | Chip L. | NL322522T-2R2J |
| L34 | OC0129 | Chip L. | NL322522T-R39J-3 |
| L35 | OC0129 | Chip L. | NL322522T-R39J-3 |
| R39 | RK4070 | Chip R. | ERJ14YJ271H |
| R40 | RK3015 | Chip R. | ERJ3GSJ120V |
| R41 | RK3031 | Chip R. | ERJ3GSJ271V |
| R47 | RK3028 | Chip R. | ERJ3GSJ151V |
| R48 | RK4068 | Chip R. | ERJ14YJ151H |
| C59 | CU3040 | Chip C. | C1608JH182KT-A |
| C60 | CU3042 | Chip C. | C1608JH1892KT-A |
| C61 | CU3040 | Chip C. | C1608JH182KT-A |
| C62 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C78 | CU3024 | Chip C. | C1608CH1H21JT-A |
| C79 | CU3033 | Chip C. | C1608JH188KT-A |
| C80 | CU3033 | Chip C. | C1608JH188KT-A |
| C81 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C82 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| D14 | X00266 | Diode | DAP236U T106 |
| D15 | X00266 | Diode | DAP236U T106 |
| L24 | OC0045 | Chip L. | NL322522T-3R3J |
| L25 | OC0045 | Chip L. | NL322522T-3R3J |
| L26 | OC0497 | Chip L. | LOHANI02J04 |
| L36 | OC0041 | Chip L. | NL322522T-1R5J |
| L37 | OC0127 | Chip L. | NL322522T-R27J-3 |
| L38 | OC0127 | Chip L. | NL322522T-R27J-3 |
| R42 | RK4069 | Chip R. | ERJ14YJ221H |
| R49 | RK3028 | Chip R. | ERJ3GSJ151V |
| R50 | RK4068 | Chip R. | ERJ14YJ151H |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| C63 | CU3034 | Chip C. | C1608JH182KT-A |
| C64 | CU3037 | Chip C. | C1608JH152KT-A |
| C65 | CU3037 | Chip C. | C1608JH152KT-A |
| C66 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C67 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C68 | CU3022 | Chip C. | C1608CH1H20JT-A |
| C68 | CU3030 | Chip C. | C1608JH189KT-A |
| C85 | CU3030 | Chip C. | C1608JH189KT-A |
| C86 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C87 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| D16 | X00266 | Diode | DAP236U T106 |
| D17 | X00266 | Diode | DAP236U T106 |
| L27 | OC0046 | Chip L. | NL322522T-3R9J |
| L28 | OC0043 | Chip L. | NL322522T-2R2J |
| L29 | OC0043 | Chip L. | NL322522T-2R2J |
| L39 | OC0039 | Chip L. | NL322522T-1R0J |
| L40 | OC0126 | Chip L. | NL322522T-R22J-3 |
| L41 | OC0126 | Chip L. | NL322522T-R22J-3 |
| R43 | RK3028 | Chip R. | ERJ3GSJ151V |
| R44 | RK4068 | Chip R. | ERJ14YJ151H |
| R51 | RK3028 | Chip R. | ERJ3GSJ151V |
| R52 | RK4068 | Chip R. | ERJ14YJ151H |
| C69 | CU3030 | Chip C. | C1608JH182KT-A |
| C70 | CU3034 | Chip C. | C1608JH182KT-A |
| C71 | CU3034 | Chip C. | C1608JH182KT-A |
| C72 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C88 | CU3092 | Chip C. | C1608CH1H510JT-A |
| C89 | CU3029 | Chip C. | C1608JH183KT-A |
| C90 | CU3029 | Chip C. | C1608JH183KT-A |
| C91 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| C92 | CU3056 | Chip C. | C1608JF1E473ZT-A |
| D18 | X00266 | Diode | DAP236U T106 |
| D19 | X00266 | Diode | DAP236U T106 |
| L30 | OC0043 | Chip L. | NL322522T-2R2J |
| L31 | OC0039 | Chip L. | NL322522T-1R0J |
| L32 | OC0039 | Chip L. | NL322522T-1R0J |
| L42 | OC0133 | Chip L. | NL322522T-R82J-3 |
| L43 | OC0123 | Chip L. | NL322522T-R12J-3 |
| L44 | OC0123 | Chip L. | NL322522T-R12J-3 |
| R45 | RK3028 | Chip R. | ERJ3GSJ151V |
| R46 | RK4068 | Chip R. | ERJ14YJ151H |
| R53 | RK3028 | Chip R. | ERJ3GSJ151V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|---------------|------------------|
| R54 | RK4068 | Chip R. | ERJ14YJ151H |
| C93 | CU3013 | Chip C. | C1608CH1H150JT-A |
| C94 | CU3026 | Chip C. | C1608CH1H18JT-A |
| C95 | CU3026 | Chip C. | C1608CH1H18JT-A |
| C96 | CU3047 | Chip C. | C1608JH103KT-A |
| C97 | CU3047 | Chip C. | C1608JH103KT-A |
| D27 | X00272 | Diode | 1SS356 TM11 |
| D28 | X00272 | Diode | 1SS356 TM11 |
| L45 | OC0031 | Chip L. | NL322522T-R56J-3 |
| L46 | OC0063 | Chip L. | NL322522T-047J |
| L47 | OC0063 | Chip L. | NL322522T-047J |
| R55 | RK3030 | Chip R. | ERJ3GSJ221V |
| R56 | RK4069 | Chip R. | ERJ14YJ221H |
| CN7 | UE0266 | Connector | S1ZB-EH |
| CN8 | UE0254 | Connector | S13B-ZH |
| CN14 | UE0263 | Connector | MSA-9120S-13 |
| CN15 | UE0263 | Connector | MSA-9120S-13 |
| CN10 | UE0261 | Connector | 09R-JE |
| J6 | UE0035 | Connector | MIC FM214-8SMPY |
| L78 | OC0086 | Chip L. | NL322522T-101J |
| L79 | OC0086 | Chip L. | NL322522T-101J |
| C701 | CU3017 | Chip C. | C1608CH1H330JT-A |
| C702 | CU3022 | Chip C. | C1608CH1H20JT-A |
| C703 | CU3047 | Chip C. | C1608JH103KT-A |
| C704 | CU3047 | Chip C. | C1608JH103KT-A |
| C705 | CU3013 | Chip C. | C1608CH1H150JT-A |
| C706 | CU3035 | Chip C. | C1608JH102KT-A |
| C707 | CU3035 | Chip C. | C1608JH102KT-A |
| C708 | CU3035 | Chip C. | C1608JH102KT-A |
| C709 | CU3035 | Chip C. | C1608JH102KT-A |
| C710 | CU3023 | Chip C. | C1608CH1H101JT-A |
| C711 | CS0372 | Chip Tantalum | TMCMB1C106MTR |
| C712 | CU3035 | Chip C. | C1608JH102KT-A |
| C713 | CS0372 | Chip Tantalum | TMCMB1C106MTR |
| C714 | CU3035 | Chip C. | C1608JH102KT-A |
| C715 | CU3035 | Chip C. | C1608JH102KT-A |
| C716 | CS0220 | Chip Tantalum | TMCMA1C225MTR |
| C717 | CS0220 | Chip Tantalum | TMCMA1C225MTR |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-----------------|------------------|
| C718 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C719 | CU3042 | Chip C. | C2012JBI104KT-A |
| C720 | CE0374 | Electrolytic C. | 16CY100B5 |
| C721 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C722 | CU3014 | Chip C. | C1608CHI180JT-A |
| C723 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C724 | CS0372 | ChipTantalum | TMCB1C105MTR |
| C725 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C726 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C727 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C728 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C729 | CU3033 | Chip C. | C1608JBIH68IKT-A |
| C730 | CU3019 | Chip C. | C1608CHI1470JT-A |
| C731 | CU3034 | Chip C. | C1608JBIH82IKT-A |
| C732 | CU3024 | Chip C. | C1608JBIH121JT-A |
| C733 | CU3032 | Chip C. | C1608JBIH56IKT-A |
| C734 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C735 | CS0225 | ChipTantalum | TMCAD1D15MTR |
| C736 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C737 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C738 | CU3051 | Chip C. | C1608JBIH102KT-A |
| C739 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C740 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C741 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C742 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C743 | CS0061 | ChipTantalum | TMCSA1Y224MTR |
| C744 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C745 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C746 | CU3012 | Chip C. | C1608CHI1010CT-A |
| C747 | CU3002 | Chip C. | C1608CHI1010CT-A |
| C748 | CU3002 | Chip C. | C1608CHI1010CT-A |
| C749 | CU3012 | Chip C. | C1608CHI1020JT-A |
| C750 | CU3007 | Chip C. | C1608CHI1060CT-A |
| C751 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C752 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C753 | CU3014 | Chip C. | C1608CHI180JT-A |
| C754 | CU3001 | Chip C. | C1608CHI1095CT-A |
| C755 | CU3088 | Chip C. | C1608CHI200JT-A |
| C756 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C757 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C758 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C759 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C760 | CE0310 | Electrolytic C. | ECEV1AA330P |
| C761 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C762 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C763 | CU3035 | Chip C. | C1608JBIH102KT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-----------------|------------------|
| C764 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C765 | CU3014 | Chip C. | C1608CHI180JT-A |
| C766 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C767 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C768 | CE0313 | Electrolytic C. | ECEV1CA220P |
| C769 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C770 | CE0313 | Electrolytic C. | ECEV1CA220P |
| C771 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C772 | CU3014 | Chip C. | C1608CHI180JT-A |
| C773 | CU3004 | Chip C. | C1608CHI1030CT-A |
| C774 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C775 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C776 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C777 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C780 | CU3046 | Chip C. | C1608JBIH82IKT-A |
| C781 | CU3046 | Chip C. | C1608JBIH82IKT-A |
| C782 | CU3041 | Chip C. | C1608JBIH332KT-A |
| C783 | CS0069 | ChipTantalum | TMCSA1V154MTR |
| C784 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C785 | CU3051 | Chip C. | C1608JBIH102KT-A |
| C786 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C787 | CU3042 | Chip C. | C2012JBI104KT-A |
| C788 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C789 | CU3015 | Chip C. | C1608JBIH220JT-A |
| C790 | CU3015 | Chip C. | C1608JBIH220JT-A |
| C791 | CU3027 | Chip C. | C1608CHI102KT-A |
| C792 | CU3027 | Chip C. | C1608CHI102KT-A |
| C793 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C794 | CS0372 | ChipTantalum | TMCMB1C105MTR |
| C795 | CU3051 | Chip C. | C1608JBIH102KT-A |
| C796 | CS0372 | ChipTantalum | TMCMB1C105MTR |
| C797 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C798 | CU3042 | Chip C. | C2012JBI104KT-A |
| C799 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C800 | CS0049 | ChipTantalum | TMCSA1C105MTR |
| C801 | CS0049 | ChipTantalum | TMCSA1C105MTR |
| C802 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C803 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C804 | CU3015 | Chip C. | C1608CHI1020JT-A |
| C805 | CU3025 | Chip C. | C1608CHI151KT-A |
| C806 | CU3025 | Chip C. | C1608CHI151KT-A |
| C807 | CU3016 | Chip C. | C1608CHI1020JT-A |
| C808 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C809 | CU3021 | Chip C. | C1608CHI1680JT-A |
| C810 | CU3011 | Chip C. | C1608JBIH100CT-A |
| C811 | CU3016 | Chip C. | C1608CHI1020JT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-----------------|------------------|
| C812 | CU3020 | Chip C. | C1608CHI180JT-A |
| C813 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C814 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C816 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C817 | CE0310 | Electrolytic C. | ECEV1A330P |
| C818 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C819 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C820 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C821 | CU3101 | Chip C. | C1608JBIH102KT-A |
| C823 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C824 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C825 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C826 | CU3020 | Chip C. | C1608CHI180JT-A |
| C827 | CU3019 | Chip C. | C1608CHI1470JT-A |
| C828 | CU3024 | Chip C. | C1608CHI121JT-A |
| C829 | CU3013 | Chip C. | C1608CHI150JT-A |
| C830 | CU3043 | Chip C. | C1608CHI150JT-A |
| C831 | CU3043 | Chip C. | C1608JBIH472KT-A |
| C832 | CU3043 | Chip C. | C1608JBIH472KT-A |
| C833 | CU3049 | Chip C. | C1608JBIH153KT-A |
| C834 | CU3101 | Chip C. | C1608JBIH472KT-A |
| C835 | CU3101 | Chip C. | C1608JBIH472KT-A |
| C836 | CU3101 | Chip C. | C1608JBIH472KT-A |
| C838 | CU3035 | Chip C. | C1608CHI1020JT-A |
| C840 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C841 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C842 | CU3013 | Chip C. | C1608CHI150JT-A |
| C844 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C845 | CU3006 | Chip C. | C1608CHI1050CT-A |
| C846 | CU3020 | Chip C. | C1608CHI180JT-A |
| C847 | CU3020 | Chip C. | C1608CHI180JT-A |
| C848 | CU3027 | Chip C. | C1608CHI221JT-A |
| C849 | CU3016 | Chip C. | C1608CHI1020JT-A |
| C850 | CU3014 | Chip C. | C1608CHI180JT-A |
| C851 | CU3016 | Chip C. | C1608CHI1020JT-A |
| C852 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C853 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C854 | CU3022 | Chip C. | C1608CHI180JT-A |
| C855 | CU3019 | Chip C. | C1608CHI1470JT-A |
| C856 | CU3010 | Chip C. | C1608CHI1090CT-A |
| C857 | CU3002 | Chip C. | C1608CHI1010CT-A |
| C858 | CU3011 | Chip C. | C1608CHI100CT-A |
| C859 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C860 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C861 | CU3002 | Chip C. | C1608CHI1010CT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| C862 | CU3011 | Chip C. | C1608CHI100CT-A |
| C863 | CU3011 | Chip C. | C1608CHI100CT-A |
| C864 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C865 | CU3035 | Chip C. | C1608JBIH102KT-A |
| C866 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C867 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C868 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C869 | CU3013 | Chip C. | C1608CHI150JT-A |
| C870 | CU3006 | Chip C. | C1608CHI1050CT-A |
| C871 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C872 | CU3016 | Chip C. | C1608CHI1020JT-A |
| C873 | CU3002 | Chip C. | C1608CHI1010CT-A |
| C874 | CU3002 | Chip C. | C1608CHI1010CT-A |
| C875 | CU3016 | Chip C. | C1608CHI1020JT-A |
| C876 | CU3016 | Chip C. | C1608CHI1020JT-A |
| C877 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C878 | CU3006 | Chip C. | C1608CHI1050CT-A |
| C879 | CU3047 | Chip C. | C1608JBIH102KT-A |
| C880 | CU3101 | Chip C. | C1608JBIH102KT-A |
| CN701 | UE0259 | Connector | CFP0526-0201 |
| CN702 | UE0165 | Connector | B4B-2F |
| D701 | XD0254 | Diode | 1SS355 TE17 |
| D702 | XD0254 | Diode | 1SS355 TE17 |
| D703 | XD0254 | Diode | 1SS355 TE17 |
| D704 | XD0289 | Diode | S9275(TE12L) |
| D705 | XD0039 | Diode | RLS4152 TE-11 |
| D706 | XD0233 | Diode | 1SV2177PH4 |
| D707 | XD0254 | Diode | 1SS355 TE17 |
| D708 | XD0231 | Diode | DAP2020 T106 |
| D709 | XD0230 | Diode | DAN2020 T106 |
| D710 | XD0254 | Diode | 1SS355 TE17 |
| D711 | XD0230 | Diode | DAN2020 T106 |
| D712 | XD0230 | Diode | DAN2020 T106 |
| D713 | XD0254 | Diode | 1SS355 TE17 |
| D714 | XD0230 | Diode | DAN2020 T106 |
| D715 | XD0230 | Diode | DAN2020 T106 |
| D716 | XD0230 | Diode | DAN2020 T106 |
| D717 | XD0230 | Diode | DAN2020 T106 |
| D718 | XD0230 | Diode | DAN2020 T106 |
| D719 | XD0230 | Diode | DAN2020 T106 |
| D720 | XD0230 | Diode | DAN2020 T106 |
| D721 | XD0230 | Diode | DAN2020 T106 |
| D722 | XD0254 | Diode | 1SS355 TE17 |
| D723 | XD0254 | Diode | 1SS355 TE17 |
| D724 | XD0272 | Diode | 1SS356 TM11 |
| D725 | XD0257 | Diode | RN711H |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|---------------------|
| D725 | X00272 | Diode | 1S5355 7M11 |
| D727 | X00254 | Diode | 1S5355 TE17 |
| D728 | X00254 | Diode | 1S5355 TE17 |
| D729 | X00254 | Diode | 1S5355 TE17 |
| D730 | X00254 | Diode | 1S5355 TE17 |
| D732 | X00254 | Diode | 1S5355 TE17 |
| D733 | X00254 | Diode | 1S5355 TE17 |
| D734 | X00254 | Diode | 1S5355 TE17 |
| D735 | X00254 | Diode | 1S5355 TE17 |
| FL701 | XC0013 | Ceramic Filter | SK117M3-AE-20(A) |
| IC701 | XA0379 | IC | MB87086APF-G-BND-TF |
| IC702 | XA0297 | IC | MB87014APF-G-BND-TF |
| IC703 | XA0298 | IC | MC74HC390FL2 |
| IC705 | XA0294 | IC | UPC10376R-EI (MS) |
| IC706 | XA0379 | IC | MB87086APF-G-BND-TF |
| IC707 | XA0297 | IC | MB87086APF-G-BND-TF |
| IC708 | XA0346 | IC | MC77805CT |
| IC709 | XA0379 | IC | UPC10376R-EI (MS) |
| IC710 | XA0305 | IC | TC74AC74F (EL) |
| IC711 | XA0304 | IC | BM4425F-EI |
| IC712 | XA0379 | IC | UPC10376R-EI (MS) |
| IC714 | XA0294 | IC | MC74HC390FL2 |
| IC715 | XA0115 | IC | TC4568FTBESL |
| IC716 | XA0246 | IC | BU4094BF-T1 |
| L701 | 0C0131 | Chip L. | NL322522T-R56J-3 |
| J701 | UX1087 | Wire | PLL - |
| L702 | 0A0108 | Coil | 0A0108 |
| J702 | UX1087 | Wire | PLL - |
| L703 | 0C0085 | Chip L. | NL322522T-R82J |
| J703 | UX1087 | Wire | PLL - |
| L704 | 0C0084 | Chip L. | NL322522T-680J |
| L705 | 0C0086 | Chip L. | NL322522T-101J |
| L706 | 0A0107 | Coil | 0A0107 |
| L707 | 0A0107 | Coil | 0A0107 |
| L708 | 0A0107 | Coil | 0A0107 |
| L709 | 0A0107 | Coil | 0A0107 |
| L710 | 0A0107 | Coil | 0A0107 |
| L711 | 0A0107 | Coil | 0A0107 |
| L712 | 0A0107 | Coil | 0A0107 |
| L713 | 0C0132 | Chip L. | NL322522T-R68J-3 |
| L714 | 0C0075 | Chip L. | NL322522T-120J |
| L715 | 0C0080 | Chip L. | NL322522T-330J |
| L716 | 0C0076 | Chip L. | NL322522T-150J |
| L717 | 0C0074 | Chip L. | NL322522T-8R2J |
| L718 | 0C0072 | Chip L. | NL322522T-56R2J |
| L719 | 0C0048 | Chip L. | NL322522T-100J |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| L720 | 0A0108 | Coil | 0A0108 |
| L721 | 0A0108 | Coil | 0A0108 |
| L722 | 0A0108 | Coil | 0A0108 |
| L724 | 0C0124 | Chip L. | NL322522T-R15J-3 |
| L725 | 0C0126 | Chip L. | NL322522T-R22J-3 |
| L726 | 0C0076 | Chip L. | NL322522T-150J |
| L727 | 0C0064 | Chip L. | NL322522T-056J |
| L728 | 0C0123 | Chip L. | NL322522T-R12J-3 |
| L729 | 0R0017 | Coil | 0R0017 |
| L730 | 0R0017 | Coil | 0R0017 |
| L731 | 0C0130 | Chip L. | NL322522T-R47J-3 |
| L732 | 0A0118 | Coil | 0A0118 |
| L733 | 0A0118 | Coil | 0A0118 |
| L734 | 0A0118 | Coil | 0A0118 |
| L735 | 0A0118 | Coil | 0A0118 |
| L736 | 0C0048 | Chip L. | NL322522T-100J |
| L737 | 0C0473 | Chip L. | LOH4M100J04 |
| L738 | 0C0064 | Chip L. | NL322522T-056J |
| 0701 | XT0095 | Transistor | 2SC4081T106R |
| 0702 | XT0059 | Transistor | 2SC3082K1T460 |
| 0703 | XT0059 | Transistor | 2SC3082K1T460 |
| 0704 | XT0080 | Transistor | 2SC3324B |
| 0705 | XT0080 | Transistor | 2SC3324B |
| 0706 | XT0080 | Transistor | 2SC3324B |
| 0707 | XT0059 | Transistor | 2SC3082K1T460 |
| 0708 | XT0059 | Transistor | 2SC3082K1T460 |
| 0709 | XT0140 | Transistor | DT1C144EU1T06 |
| 0710 | XT0059 | Transistor | 2SC3082K1T460 |
| 0712 | XT0059 | Transistor | 2SC3082K1T460 |
| 0713 | XT0096 | Transistor | 2SC4091T106R |
| 0714 | XT0059 | Transistor | 2SC3082K1T460 |
| 0715 | XT0140 | Transistor | DT1C144EU1T06 |
| 0716 | XT0059 | Transistor | 2SC3082K1T460 |
| 0717 | XT0140 | Transistor | DT1C144EU1T06 |
| 0718 | XT0148 | Transistor | DT1C144EU1T06 |
| 0719 | XT0059 | Transistor | 2SC3082K1T460 |
| 0721 | XT0095 | Transistor | 2SC4081T106R |
| 0722 | XT0095 | Transistor | 2SC4081T106R |
| 0723 | XT0095 | Transistor | 2SC4081T106R |
| 0724 | XT0095 | Transistor | 2SC4081T106R |
| 0725 | XT0095 | Transistor | 2SC4081T106R |
| 0726 | XT0125 | Transistor | DT1C144EU1T06 |
| 0727 | XT0148 | Transistor | DT1C144EU1T06 |
| 0728 | XT0094 | Transistor | DT1C144EU1T06 |
| 0729 | XT0148 | Transistor | DT1C144EU1T06 |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|---------------|
| 0730 | XU0148 | Transistor | DT1C144EU1T06 |
| 0731 | XT0059 | Transistor | 2SC3082K1T460 |
| 0732 | XU0174 | Transistor | UN5112 |
| 0733 | XU0125 | Transistor | DT1A44EU1T06 |
| 0734 | XU0148 | Transistor | DT1C144EU1T06 |
| 0735 | XU0148 | Transistor | DT1C144EU1T06 |
| R701 | RK3030 | Chip R | ERJ36SYJ221V |
| R702 | RK3052 | Chip R | ERJ36SYJ153V |
| R703 | RK3046 | Chip R | ERJ36SYJ472V |
| R704 | RK3034 | Chip R | ERJ36SYJ471V |
| R705 | RK3022 | Chip R | ERJ36SYJ470V |
| R706 | RK3054 | Chip R | ERJ36SYJ223V |
| R707 | RK3038 | Chip R | ERJ36SYJ102V |
| R708 | RK3054 | Chip R | ERJ36SYJ223V |
| R709 | RK3042 | Chip R | ERJ36SYJ222V |
| R710 | RK3022 | Chip R | ERJ36SYJ470V |
| R711 | RK3054 | Chip R | ERJ36SYJ223V |
| R712 | RK3034 | Chip R | ERJ36SYJ102V |
| R713 | RK3054 | Chip R | ERJ36SYJ223V |
| R714 | RK3042 | Chip R | ERJ36SYJ222V |
| R715 | RK3050 | Chip R | ERJ36SYJ103V |
| R716 | RK3050 | Chip R | ERJ36SYJ103V |
| R717 | RK3034 | Chip R | ERJ36SYJ471V |
| R718 | RK3034 | Chip R | ERJ36SYJ471V |
| R719 | RK3034 | Chip R | ERJ36SYJ471V |
| R720 | RK3050 | Chip R | ERJ36SYJ103V |
| R721 | RK3038 | Chip R | ERJ36SYJ102V |
| R722 | RK3034 | Chip R | ERJ36SYJ102V |
| R723 | RK3034 | Chip R | ERJ36SYJ471V |
| R724 | RK3034 | Chip R | ERJ36SYJ471V |
| R725 | RK3042 | Chip R | ERJ36SYJ222V |
| R726 | RK3038 | Chip R | ERJ36SYJ102V |
| R727 | RK3038 | Chip R | ERJ36SYJ102V |
| R728 | RK3070 | Chip R | ERJ36SYJ474V |
| R729 | RK3026 | Chip R | ERJ36SYJ101V |
| R730 | RK3038 | Chip R | ERJ36SYJ102V |
| R731 | RK3046 | Chip R | ERJ36SYJ472V |
| R732 | RK3026 | Chip R | ERJ36SYJ101V |
| R733 | RK3026 | Chip R | ERJ36SYJ101V |
| R734 | RK3050 | Chip R | ERJ36SYJ103V |
| R735 | RK3058 | Chip R | ERJ36SYJ473V |
| R736 | RK3048 | Chip R | ERJ36SYJ682V |
| R737 | RK3035 | Chip R | ERJ36SYJ561V |
| R740 | RK3026 | Chip R | ERJ36SYJ101V |
| R741 | RK3001 | Chip R | ERJ36SYJ221V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R742 | RK3038 | Chip R | ERJ36SYJ102V |
| R743 | RK3026 | Chip R | ERJ36SYJ101V |
| R744 | RK3030 | Chip R | ERJ36SYJ221V |
| R745 | RK3050 | Chip R | ERJ36SYJ103V |
| R746 | RK3041 | Chip R | ERJ36SYJ182V |
| R747 | RK3038 | Chip R | ERJ36SYJ102V |
| R748 | RK3026 | Chip R | ERJ36SYJ101V |
| R749 | RK3001 | Chip R | ERJ36SYJ090V |
| R750 | RK3022 | Chip R | ERJ36SYJ470V |
| R751 | RK3026 | Chip R | ERJ36SYJ101V |
| R752 | RK3026 | Chip R | ERJ36SYJ101V |
| R753 | RK3038 | Chip R | ERJ36SYJ102V |
| R754 | RK3054 | Chip R | ERJ36SYJ223V |
| R755 | RK3042 | Chip R | ERJ36SYJ222V |
| R756 | RK3054 | Chip R | ERJ36SYJ223V |
| R757 | RK3050 | Chip R | ERJ36SYJ103V |
| R758 | RK3034 | Chip R | ERJ36SYJ471V |
| R759 | RK3034 | Chip R | ERJ36SYJ471V |
| R760 | RK3034 | Chip R | ERJ36SYJ471V |
| R761 | RK3034 | Chip R | ERJ36SYJ471V |
| R762 | RK3026 | Chip R | ERJ36SYJ101V |
| R763 | RK3050 | Chip R | ERJ36SYJ103V |
| R764 | RK3046 | Chip R | ERJ36SYJ472V |
| R765 | RK3038 | Chip R | ERJ36SYJ102V |
| R766 | RK3066 | Chip R | ERJ36SYJ224V |
| R767 | RK3074 | Chip R | ERJ36SYJ105V |
| R769 | RK3062 | Chip R | ERJ36SYJ104V |
| R770 | RK3034 | Chip R | ERJ36SYJ471V |
| R771 | RK3034 | Chip R | ERJ36SYJ471V |
| R773 | RK3042 | Chip R | ERJ36SYJ222V |
| R774 | RK3042 | Chip R | ERJ36SYJ222V |
| R775 | RK3046 | Chip R | ERJ36SYJ472V |
| R776 | RK3026 | Chip R | ERJ36SYJ101V |
| R777 | RK3038 | Chip R | ERJ36SYJ102V |
| R778 | RK3042 | Chip R | ERJ36SYJ222V |
| R779 | RK3034 | Chip R | ERJ36SYJ471V |
| R780 | RK3042 | Chip R | ERJ36SYJ222V |
| R781 | RK3054 | Chip R | ERJ36SYJ223V |
| R782 | RK3054 | Chip R | ERJ36SYJ223V |
| R783 | RK3042 | Chip R | ERJ36SYJ222V |
| R784 | RK3054 | Chip R | ERJ36SYJ223V |
| R785 | RK3052 | Chip R | ERJ36SYJ153V |
| R786 | RK3062 | Chip R | ERJ36SYJ104V |
| R787 | RK3062 | Chip R | ERJ36SYJ104V |
| R788 | RK3046 | Chip R | ERJ36SYJ472V |
| R794 | RK3026 | Chip R | ERJ36SYJ101V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R795 | RK3050 | Chip R | ERJ3GSYJ103V |
| R796 | RK3074 | Chip R | ERJ3GSYJ105V |
| R797 | RK3046 | Chip R | ERJ3GSYJ472V |
| R798 | RK3054 | Chip R | ERJ3GSYJ223V |
| R800 | RK3038 | Chip R | ERJ3GSYJ102V |
| R801 | RK3030 | Chip R | ERJ3GSYJ221V |
| R802 | RK3036 | Chip R | ERJ3GSYJ681V |
| R803 | RK3050 | Chip R | ERJ3GSYJ103V |
| R804 | RK3050 | Chip R | ERJ3GSYJ103V |
| R805 | RK3039 | Chip R | ERJ3GSYJ122V |
| R806 | RK3054 | Chip R | ERJ3GSYJ223V |
| R807 | RK3052 | Chip R | ERJ3GSYJ153V |
| R808 | RK3046 | Chip R | ERJ3GSYJ472V |
| R809 | RK3046 | Chip R | ERJ3GSYJ472V |
| R810 | RK3030 | Chip R | ERJ3GSYJ221V |
| R811 | RK3046 | Chip R | ERJ3GSYJ472V |
| R812 | RK3030 | Chip R | ERJ3GSYJ221V |
| R813 | RK3046 | Chip R | ERJ3GSYJ472V |
| R814 | RK3046 | Chip R | ERJ3GSYJ472V |
| R815 | RK3042 | Chip R | ERJ3GSYJ222V |
| R816 | RK3030 | Chip R | ERJ3GSYJ221V |
| R817 | RK3046 | Chip R | ERJ3GSYJ472V |
| R818 | RK3052 | Chip R | ERJ3GSYJ104V |
| R819 | RK3039 | Chip R | ERJ3GSYJ104V |
| R820 | RK3026 | Chip R | ERJ3GSYJ101V |
| R821 | RK3026 | Chip R | ERJ3GSYJ101V |
| R822 | RK3054 | Chip R | ERJ3GSYJ223V |
| R823 | RK3054 | Chip R | ERJ3GSYJ223V |
| R824 | RK3042 | Chip R | ERJ3GSYJ222V |
| R825 | RK3038 | Chip R | ERJ3GSYJ102V |
| R826 | RK3026 | Chip R | ERJ3GSYJ101V |
| R827 | RK3056 | Chip R | ERJ3GSYJ333V |
| R828 | RK3050 | Chip R | ERJ3GSYJ103V |
| R829 | RK3014 | Chip R | ERJ3GSYJ100V |
| R830 | RK3032 | Chip R | ERJ3GSYJ331V |
| R831 | RK3026 | Chip R | ERJ3GSYJ101V |
| R832 | RK3026 | Chip R | ERJ3GSYJ101V |
| R833 | RK3033 | Chip R | ERJ3GSYJ391V |
| R834 | RK3042 | Chip R | ERJ3GSYJ222V |
| R835 | RK3026 | Chip R | ERJ3GSYJ102V |
| R836 | RK3050 | Chip R | ERJ3GSYJ103V |
| R838 | RK3042 | Chip R | ERJ3GSYJ101V |
| R839 | RK3026 | Chip R | ERJ3GSYJ101V |
| R840 | RK3062 | Chip R | ERJ3GSYJ104V |
| R841 | RK3042 | Chip R | ERJ3GSYJ222V |
| R842 | RK3033 | Chip R | ERJ3GSYJ391V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|---------------|
| R843 | RK3046 | Chip R | ERJ3GSYJ472V |
| R844 | RK3030 | Chip R | ERJ3GSYJ221V |
| R845 | RK3034 | Chip R | ERJ3GSYJ471V |
| R846 | RK3050 | Chip R | ERJ3GSYJ103V |
| R847 | RK3034 | Chip R | ERJ3GSYJ471V |
| R848 | RK3014 | Chip R | ERJ3GSYJ100V |
| R849 | RK3034 | Chip R | ERJ3GSYJ471V |
| R850 | RK3054 | Chip R | ERJ3GSYJ223V |
| R851 | RK3046 | Chip R | ERJ3GSYJ103V |
| R852 | RK3028 | Chip R | ERJ3GSYJ151V |
| R853 | RK3026 | Chip R | ERJ3GSYJ101V |
| R854 | RK3022 | Chip R | ERJ3GSYJ470V |
| R855 | RK3018 | Chip R | ERJ3GSYJ220V |
| R856 | RK3050 | Chip R | ERJ3GSYJ103V |
| R857 | RK3038 | Chip R | ERJ3GSYJ102V |
| R858 | RK3030 | Chip R | ERJ3GSYJ221V |
| R859 | RK3051 | Chip R | ERJ3GSYJ123V |
| R860 | RK3034 | Chip R | ERJ3GSYJ471V |
| R861 | RK3032 | Chip R | ERJ3GSYJ331V |
| R862 | RK3038 | Chip R | ERJ3GSYJ102V |
| R863 | RK3062 | Chip R | ERJ3GSYJ104V |
| R864 | RK3032 | Chip R | ERJ3GSYJ331V |
| R865 | RK3026 | Chip R | ERJ3GSYJ101V |
| R866 | RK3034 | Chip R | ERJ3GSYJ471V |
| R867 | RK3034 | Chip R | ERJ3GSYJ471V |
| R868 | RK3062 | Chip R | ERJ3GSYJ104V |
| R869 | RK3034 | Chip R | ERJ3GSYJ471V |
| R870 | RK3026 | Chip R | ERJ3GSYJ101V |
| R871 | RK3042 | Chip R | ERJ3GSYJ222V |
| R872 | RK3038 | Chip R | ERJ3GSYJ102V |
| R873 | RK3034 | Chip R | ERJ3GSYJ471V |
| R874 | RK3054 | Chip R | ERJ3GSYJ223V |
| R875 | RK3026 | Chip R | ERJ3GSYJ101V |
| R876 | RK3058 | Chip R | ERJ3GSYJ473V |
| R877 | RK3026 | Chip R | ERJ3GSYJ101V |
| R878 | RK3001 | Chip R | ERJ3GSYJ0R00V |
| R879 | RK3042 | Chip R | ERJ3GSYJ222V |
| R881 | RK3050 | Chip R | ERJ3GSYJ103V |
| R882 | RK3050 | Chip R | ERJ3GSYJ103V |
| R883 | RK3050 | Chip R | ERJ3GSYJ103V |
| R884 | RK3050 | Chip R | ERJ3GSYJ103V |
| R885 | RK3050 | Chip R | ERJ3GSYJ103V |
| R886 | RK3050 | Chip R | ERJ3GSYJ103V |
| R887 | RK3050 | Chip R | ERJ3GSYJ103V |
| R888 | RK3050 | Chip R | ERJ3GSYJ103V |
| R889 | RK3026 | Chip R | ERJ3GSYJ101V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|----------------------|
| R890 | RK3024 | Chip R | ERJ3GSYJ680V |
| R891 | RK3030 | Chip R | ERJ3GSYJ221V |
| R892 | RK3030 | Chip R | ERJ3GSYJ471V |
| R893 | RK3030 | Chip R | ERJ3GSYJ221V |
| R894 | RK3052 | Chip R | ERJ3GSYJ153V |
| RL701 | UL0010 | Relay | FBR2D12 |
| TC701 | CT0012 | Trimmer | CTZ-10AM |
| TC702 | CT0034 | Trimmer | CTZ35-30CW1-P |
| TC703 | CT0034 | Trimmer | CTZ35-30CW1-P |
| TC704 | CT0034 | Trimmer | CTZ35-30CW1-P |
| TC705 | CT0012 | Trimmer | CTZ-10AM |
| TH701 | XS0014 | Thermistor | TBPS1R223K460H50 |
| VR701 | RH0104 | Trim Pot | EW1Y5A50BE4 |
| VR702 | RH0104 | Trim Pot | EW1Y5A50BE4 |
| X701 | X00065 | Crystal | 49U-30 00MHz |
| X702 | X00066 | Crystal | 49U-9.420MHz |
| X703 | X00067 | Crystal | 49U-9.875MHz |
| TZ0056 | 49U | | |
| TZ0056 | 49U | | |
| TZ0056 | 49U | | |
| UA0048 | | P. C. B | SMC026-50-BDx6-Pl. 0 |
| UP0284 | | | Circuit Board A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|---------------|
| 0932 | XT0059 | Transistor | 2SC3082K11460 |
| 0933 | XT0095 | Transistor | 2SC4081T106R |
| 0926 | RK3050 | Chip R | ERJ3GSYJ103V |
| 0927 | RK3030 | Chip R | ERJ3GSYJ221V |
| 0928 | RK3026 | Chip R | ERJ3GSYJ101V |
| 0929 | RK3065 | Chip R | ERJ3GSYJ184V |
| 0930 | RK3038 | Chip R | ERJ3GSYJ102V |
| 0931 | RK3050 | Chip R | ERJ3GSYJ103V |
| 0932 | RK3062 | Chip R | ERJ3GSYJ104V |
| 0933 | RK3062 | Chip R | ERJ3GSYJ104V |
| 0934 | RK3028 | Chip R | ERJ3GSYJ151V |
| 0935 | RK3050 | Chip R | ERJ3GSYJ103V |
| 0936 | RK3050 | Chip R | ERJ3GSYJ103V |
| 0937 | RK3030 | Chip R | ERJ3GSYJ221V |
| 0939 | RK3038 | Chip R | ERJ3GSYJ102V |
| TS0106 | | Chip R | VC0 Case (A) |

| VC02 Unit | | | |
|-----------|-----------|---------------|------------------|
| Ref. No. | Parts No. | Description | Parts Name |
| C941 | CU3035 | Chip C | C1608JB1H102KT-A |
| C942 | CU3021 | Chip C | C1608CHH680JT-A |
| C943 | CU3020 | Chip C | C1608CHH560JT-A |
| C944 | CU3017 | Chip C | C1608CHH330JT-A |
| C945 | CU3012 | Chip C | C1608CHH120JT-A |
| C946 | CU3012 | Chip C | C1608CHH120JT-A |
| C947 | CU3004 | Chip C | C1608CHH030CT-A |
| C948 | CU3035 | Chip C | C1608JB1H102KT-A |
| C949 | CU3004 | Chip C | C1608CHH030CT-A |
| C950 | CS0382 | Chip Tantulum | TMCMB1A225MTR |
| C951 | CU3035 | Chip C | C1608JB1H102KT-A |
| C952 | CU3035 | Chip C | C1608JB1H102KT-A |
| C953 | CU3035 | Chip C | C1608JB1H102KT-A |
| C954 | CU3035 | Chip C | C1608JB1H102KT-A |
| C955 | CU3035 | Chip C | C1608JB1H102KT-A |
| C956 | CS0237 | Chip Tantulum | TMCMA1A475MTR |
| C957 | CU3047 | Chip C | C1608JB1H102KT-A |
| C958 | UE0185 | Connector | B6P-8C-2 |
| CM902 | UE0185 | Connector | B6P-8C-2 |
| D941 | X00233 | Diode | 1SV217TPH4 |
| L941 | 0A0110 | Coil | 0A0110 |
| L942 | 0C0047 | Chip L | NL32252T-4R7J |
| 0941 | XE0006 | FET | 2SK210GR-TE85L |
| 0942 | XT0059 | Transistor | 2SC3082K11460 |
| 0943 | XT0059 | Transistor | 2SC3082K11460 |
| 0944 | XT0059 | Transistor | 2SC3082K11460 |
| 0945 | XT0059 | Transistor | 2SC3082K11460 |
| 0925 | RK3062 | Chip R | ERJ3GSYJ104V |

VC01 Unit

| Ref. No. | Parts No. | Description | Parts Name |
|------------------|-----------|---------------|-----------------|
| R940 | RK3026 | Chip R | ERJ3G5YJ101V |
| R941 | RK3050 | Chip R | ERJ3G5YJ103V |
| R942 | RK3054 | Chip R | ERJ3G5YJ223V |
| R943 | RK3062 | Chip R | ERJ3G5YJ104V |
| R944 | RK3062 | Chip R | ERJ3G5YJ104V |
| R945 | RK3031 | Chip R | ERJ3G5YJ271V |
| R946 | RK3054 | Chip R | ERJ3G5YJ223V |
| R947 | RK3054 | Chip R | ERJ3G5YJ223V |
| R948 | RK3042 | Chip R | ERJ3G5YJ222V |
| R949 | RK3054 | Chip R | ERJ3G5YJ223V |
| R950 | RK3054 | Chip R | ERJ3G5YJ223V |
| R951 | RK3038 | Chip R | ERJ3G5YJ102V |
| R952 | RK3030 | Chip R | ERJ3G5YJ221V |
| R953 | RK3030 | Chip R | ERJ3G5YJ221V |
| R954 | RK3040 | Chip R | ERJ3G5YJ152V |
| R955 | RK3032 | Chip R | ERJ3G5YJ331V |
| R956 | RK3035 | Chip R | ERJ3G5YJ561V |
| R957 | RK3036 | Chip R | ERJ3G5YJ681V |
| R958 | RK3050 | Chip R | ERJ3G5YJ103V |
| R959 | RK3047 | Chip R | ERJ3G5YJ562V |
| T30105 | | VC0 Case(A) | |
| VCO3 Unit | | | |
| R961 | CU3026 | Chip C | C1608CH1810CT-A |
| R962 | CU3011 | Chip C | C1608CH100CT-A |
| R963 | CU3020 | Chip C | C1608CH1660JT-A |
| R964 | CU3013 | Chip C | C1608CH150JT-A |
| R965 | CU3012 | Chip C | C1608CH120JT-A |
| R966 | CU3006 | Chip C | C1608CH1050CT-A |
| R967 | CU3035 | Chip C | C1608CH102KT-A |
| R968 | C50382 | Chip Tantalum | TMCMBAJ225MTR |
| R969 | CU3035 | Chip C | C1608CH102KT-A |
| R970 | CU3035 | Chip C | C1608CH102KT-A |
| R971 | CU3022 | Chip C | C1608CH1820JT-A |
| R972 | CU3009 | Chip C | C1608CH1080CT-A |
| R973 | CU3018 | Chip C | C1608CH1390JT-A |
| R974 | CU3012 | Chip C | C1608CH120JT-A |
| R975 | CU3010 | Chip C | C1608CH1090CT-A |
| R976 | CU3006 | Chip C | C1608CH1050CT-A |
| R977 | CU3035 | Chip C | C1608CH102KT-A |
| R978 | C50382 | Chip Tantalum | TMCMBAJ225MTR |
| R979 | CU3035 | Chip C | C1608CH102KT-A |
| R980 | CU3035 | Chip C | C1608CH102KT-A |
| R981 | CU3018 | Chip C | C1608CH1830JT-A |
| R982 | CU3005 | Chip C | C1608CH1040CT-A |
| R983 | CU3017 | Chip C | C1608CH1830JT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|-------------------|
| C502 | CU3047 | Chip C | C1608JBIH103KT-A |
| C503 | CC5095 | Ceramic C | RCC12SL471J-L46AU |
| C504 | CC5093 | Ceramic C | RCC12SL391J-L46AU |
| C505 | CM0008 | Mica C | DM19 222J 500V |
| C506 | CC5083 | Ceramic C | RCC08SL151J-L46AU |
| C507 | CC5095 | Ceramic C | RCC12SL471J-L46AU |
| C508 | CU3047 | Chip C | C1608JBIH103KT-A |
| C509 | CU3047 | Chip C | C1608JBIH103KT-A |
| C510 | CC5091 | Ceramic C | RCC11SL331J-L46AU |
| C511 | CC5089 | Ceramic C | RCC10SL271J-L46AU |
| C512 | CC5095 | Ceramic C | RCC12SL471J-L46AU |
| C513 | CC5077 | Ceramic C | RCC07SL820J-L46AU |
| C514 | CC5099 | Ceramic C | HM15SJ-SL681J |
| C515 | CU3047 | Chip C | C1608JBIH103KT-A |
| C516 | CU3047 | Chip C | C1608JBIH103KT-A |
| C517 | CC5095 | Ceramic C | RCC12SL471J-L46AU |
| C518 | CC5069 | Ceramic C | RCC06SL470J-L46AU |
| C519 | CC5099 | Ceramic C | HM15SJ-SL681J |
| C520 | CC5081 | Ceramic C | RCC07SL121J-L46AU |
| C521 | CC5079 | Ceramic C | RCC07SL101J-L46AU |
| C522 | CU3047 | Chip C | C1608JBIH103KT-A |
| C523 | CU3047 | Chip C | C1608JBIH103KT-A |
| C524 | CC5083 | Ceramic C | RCC08SL151J-L46AU |
| C525 | CC5088 | Ceramic C | RCC06SL390J-L46AU |
| C526 | CC5091 | Ceramic C | RCC11SL331J-L46AU |
| C527 | CC5077 | Ceramic C | RCC07SL820J-L46AU |
| C528 | CC5085 | Ceramic C | RCC08SL181J-L46AU |
| C529 | CU3047 | Chip C | C1608JBIH103KT-A |
| C530 | CU3047 | Chip C | C1608JBIH103KT-A |
| C531 | CC5079 | Ceramic C | RCC07SL101J-L46AU |
| C532 | CC5060 | Ceramic C | RCC05SL50J-L46AE |
| C533 | CC5085 | Ceramic C | RCC09SL181J-L46AU |
| C534 | CC5069 | Ceramic C | RCC06SL470J-L46AU |
| C535 | CC5077 | Ceramic C | RCC07SL820J-L46AU |
| C536 | CU3047 | Chip C | C1608JBIH103KT-A |
| C537 | CU3047 | Chip C | C1608JBIH103KT-A |
| C538 | CC5064 | Ceramic C | RCC05SL220J-L46AE |
| C539 | CC5065 | Ceramic C | RCC05SL270J-L46AE |
| C540 | CC5081 | Ceramic C | RCC07SL121J-L46AU |
| C542 | CC5084 | Ceramic C | RCC05SL220J-L46AE |
| C543 | CC5073 | Ceramic C | RCC06SL560J-L46AU |
| C544 | CU3047 | Chip C | C1608JBIH103KT-A |
| C545 | CU3027 | Chip C | C1608CHI4221JT-A |
| C546 | CU3027 | Chip C | C1608CHI4221JT-A |
| C547 | CU3029 | Chip C | C1608JBIH331KT-A |
| C548 | CU3031 | Chip C | C1608JBIH411KT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|------------------|-----------|---------------|----------------------|
| R978 | RK3046 | Chip R | ERJ3G5YJ472V |
| TC961 | CT0012 | Trimmer | CTZ-104W |
| TC962 | CT0012 | Trimmer | CTZ-104W |
| TC963 | CT0012 | Trimmer | CTZ-104W |
| TS0107 | | | VC0 Case(B) |
| NFB Unit | | | |
| C633 | CM0012 | Mica C | DM19 472J 500V |
| C637 | CM0012 | Mica C | DM19 472J 500V |
| D604 | X00264 | Diode | MA30-B(TX) |
| D605 | X00264 | Diode | MA30-B(TX) |
| L612 | OC0048 | Chip L | NL322522T-100J |
| R621 | RK6026 | Chip R | ERJ1WYJ101H |
| R622 | RK6026 | Chip R | ERJ1WYJ101H |
| R623 | RK6023 | Chip R | ERJ1WYJ560H |
| R626 | RK6026 | Chip R | ERJ1WYJ101H |
| R627 | RK6026 | Chip R | ERJ1WYJ101H |
| R628 | RK6023 | Chip R | ERJ1WYJ560H |
| TH601 | X80021 | Thermistor | T8P5R103K440H50 |
| TONE Unit | | | |
| C901 | C50049 | Chip Tantalum | TMCSA1C105MTR 70T |
| C902 | CU3047 | Chip C | C1608JBIH103KT-A 70T |
| C903 | C50372 | Chip Tantalum | TMCMBA1C105MTR 70T |
| C904 | C50220 | Chip Tantalum | TMCMBA225MTR 70T |
| C905 | CU3006 | Chip C | C1608CH1050CT-A 70T |
| C907 | CU3101 | Chip C | C1608JBI473KT-A 70T |
| CN991 | UX1049 | Wire | E-19U 70T |
| D901 | X00254 | Diode | 1S5355 TE17 70T |
| IC901 | XA0052 | IC | ST116A 70T |
| C901 | XT0095 | Transistor | 2SC4081T106R 70T |
| R901 | RK3050 | Chip R | ERJ3G5YJ103V 70T |
| R902 | RK3058 | Chip R | ERJ3G5YJ473V 70T |
| R903 | RK3026 | Chip R | ERJ3G5YJ101V 70T |
| R904 | RK3066 | Chip R | ERJ3G5YJ224V 70T |
| R905 | RK3046 | Chip R | ERJ3G5YJ472V 70T |
| R906 | RK3057 | Chip R | ERJ3G5YJ393V 70T |
| R907 | RK3034 | Chip R | ERJ3G5YJ393V 70T |
| R908 | RK3057 | Chip R | ERJ3G5YJ473V 70T |
| R909 | RK3058 | Chip R | ERJ3G5YJ393V 70T |
| R910 | RK3054 | Chip R | ERJ3G5YJ223V 70T |
| SN901 | U00205 | Switch | SGM18001A 70T |
| X901 | X80201 | Cystal | FARC4CA0380K01R 70T |
| FILT Unit | | | |
| C501 | CU7003 | Chip C | C3K31MR102K |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|-------------------|
| C549 | CU3031 | Chip C | C1608BH1H03KT-A |
| C550 | CU3047 | Chip C | C1608BH1H03KT-A |
| C551 | CU3047 | Chip C | C1608BH1H03KT-A |
| C552 | CU3047 | Chip C | C1608BH1H03KT-A |
| C553 | CU3047 | Chip C | C1608BH1H03KT-A |
| C554 | CU3047 | Chip C | C1608BH1H03KT-A |
| C555 | CU3047 | Chip C | C1608BH1H03KT-A |
| C556 | CU3047 | Chip C | C1608BH1H03KT-A |
| C557 | CU3047 | Chip C | C1608BH1H03KT-A |
| C558 | CU3047 | Chip C | C1608BH1H03KT-A |
| C559 | CU3047 | Chip C | C1608BH1H03KT-A |
| C560 | CU3047 | Chip C | C1608BH1H03KT-A |
| C561 | CU3047 | Chip C | C1608BH1H03KT-A |
| C562 | CU3019 | Chip C | C1608BH1H03KT-A |
| C563 | CU3027 | Chip C | C1608BH1H03KT-A |
| C564 | CU3019 | Chip C | C1608BH1H03KT-A |
| C565 | CU3015 | Chip C | C1608BH1H03KT-A |
| C566 | CU3023 | Chip C | C1608BH1H03KT-A |
| C567 | CU3031 | Chip C | C1608BH1H03KT-A |
| C568 | CU3029 | Chip C | C1608BH1H03KT-A |
| C569 | CU3031 | Chip C | C1608BH1H03KT-A |
| C570 | CU9032 | Chip C | CM316C46620J |
| C572 | CU7007 | Chip C | C2C31N2AC6620J |
| C573 | CU7026 | Chip C | C2C31N2AC6660D |
| C574 | CU7037 | Chip C | C2C31N2AC6470J |
| C575 | CU7032 | Chip C | C3K31NARI02K |
| C576 | CU3047 | Chip C | C1608BH1H03KT-A |
| C580 | CU3024 | Chip C | C1608BH1H03KT-A |
| C581 | CU3026 | Chip C | C1608BH1H03KT-A |
| C582 | CU3024 | Chip C | C1608BH1H03KT-A |
| C583 | CU8042 | Chip C | C2012JB1C104KT-A |
| C584 | CU8042 | Chip C | C2012JB1C104KT-A |
| C585 | CU3047 | Chip C | C1608BH1H03KT-A |
| C586 | CU3042 | Chip C | C2012JB1C104KT-A |
| C587 | CU8042 | Chip C | C2012JB1C104KT-A |
| C588 | CU8042 | Chip C | C2012JB1C104KT-A |
| C589 | CU8042 | Chip C | C2012JB1C104KT-A |
| C590 | CC5095 | Ceramic C | RCC12SL471J-L46AU |
| C591 | CC5099 | Ceramic C | HM15SJ-SL68J |
| C592 | CC5095 | Ceramic C | RCC12SL471J-L46AU |
| C593 | CU3023 | Chip C | C1608BH1H03KT-A |
| CNS01 | UE0136 | Connector | TWF-J02X-A1 |
| CNS02 | UE0136 | Connector | TWF-J02X-A1 |
| CNS03 | RD0108 | Resistor | JPM01 R-01 |
| CNS04 | RD0108 | Resistor | JPM01 R-01 |
| CNS06 | UE0043 | Connector | P12ZA0M |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|---------------|----------------------|
| CNS07 | UE0235 | Connector | 00-6208-009-112-001 |
| CNS08 | UE0070 | Connector | P12ZA0M |
| CNS09 | UE0071 | Connector | P12ZA0M |
| D501 | XD0039 | Diode | RLS4152 TE-11 |
| D502 | XD0039 | Diode | RLS4152 TE-11 |
| D503 | XD0039 | Diode | RLS4152 TE-11 |
| D504 | XD0039 | Diode | RLS4152 TE-11 |
| D505 | XD0039 | Diode | RLS4152 TE-11 |
| D506 | XD0039 | Diode | RLS4152 TE-11 |
| D507 | X00127 | Diode | MA704FA |
| D508 | X00014 | Diode | M1308 |
| D509 | X00014 | Diode | M1308 |
| D510 | X00127 | Diode | MA704FA |
| D511 | XD0039 | Diode | RLS4152 TE-11 |
| D512 | XD0039 | Diode | RLS4152 TE-11 |
| D513 | XD0039 | Diode | RLS4152 TE-11 |
| L501 | OR0004 | Coil | Troidal Core OR0004 |
| L502 | OR0005 | Coil | Troidal Core OR0005 |
| L503 | OR0006 | Coil | Troidal Core OR0006 |
| L504 | OR0007 | Coil | Troidal Core OR0007 |
| L505 | OR0009 | Coil | Troidal Core OR0009 |
| L506 | OR0008 | Coil | Troidal Core OR0008 |
| L507 | OR0011 | Coil | Troidal Core OR0011 |
| L508 | OR0010 | Coil | Troidal Core OR0010 |
| L509 | OKA75H | Air Core Coil | COIL WR10.0 7.5T 1.0 |
| L510 | OKA65H | Air Core Coil | COIL WR10.0 6.5T 1.0 |
| L511 | OKA45H | Air Core Coil | COIL WR10.0 4.5T 1.0 |
| L512 | OKA55H | Air Core Coil | COIL WR10.0 5.5T 1.0 |
| L513 | OR0013 | Coil | Troidal Core OR0013 |
| L514 | OR0017 | Coil | OR0017 |
| L515 | OC0124 | Chip L | NL3225Z2T-R15J-3 |
| L516 | OC0124 | Chip L | NL3225Z2T-R15J-3 |
| L517 | OC0338 | Coil | SP0406-3R3K-6 |
| L518 | OKA75G | Air Core Coil | COIL WRS.0 7.5T 0.6 |
| L519 | OR0013 | Coil | Troidal Core OR0013 |
| L520 | OKA75G | Air Core Coil | COIL WRS.0 7.5T 0.6 |
| L521 | OKA55G | Air Core Coil | COIL WRS.0 5.5T 0.6 |
| L524 | OC0123 | Chip L | NL3225Z2T-R12J-3 |
| L525 | OC0126 | Chip L | NL3225Z2T-R22J-3 |
| L526 | OC0126 | Chip L | NL3225Z2T-R22J-3 |
| L527 | OC0473 | Chip L | LOHANI00J04 |
| L528 | OC0087 | Chip L | RL3225Z2T-121J |
| L529 | OC0087 | Chip L | RL3225Z2T-121J |
| L530 | OC0087 | Chip L | RL3225Z2T-121J |
| L531 | OC0048 | Chip L | NL3225Z2T-100J |
| L532 | OC0048 | Chip L | NL3225Z2T-100J |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| L533 | OC0048 | Chip L | NL3225Z2T-100J |
| L534 | RD1013 | Resistor | JPM02R-01 |
| L535 | RD1013 | Resistor | JPM02R-01 |
| L536 | OC0132 | Chip L | NL3225Z2T-R68J-3 |
| Q501 | XU0155 | Transistor | DTB123VK |
| Q502 | XU0148 | Transistor | DTI144EUT106 |
| Q503 | XE0026 | FET | 2SK2171-4 |
| Q504 | XU0078 | Transistor | 5N5211-TX |
| Q505 | XT0067 | Transistor | FMA4 |
| Q506 | XT0067 | Transistor | FMA4 |
| Q507 | XT0067 | Transistor | FMA4 |
| Q508 | XU0116 | Transistor | DTA123EUT106 |
| Q509 | XU0175 | Transistor | 5N5111-TX |
| R501 | RK4029 | Chip R | ERJ-12YJ181H |
| R502 | RK4024 | Chip R | ERJ-12YJ680H |
| R503 | RK0107 | Chip R | ERJ6GEYJ000V |
| R504 | RK3050 | Chip R | ERJ3GSYJ103V |
| R505 | RK3050 | Chip R | ERJ3GSYJ103V |
| R506 | RK3052 | Chip R | ERJ3GSYJ153V |
| R507 | RK3052 | Chip R | ERJ3GSYJ153V |
| R508 | RK3062 | Chip R | ERJ3GSYJ104V |
| R509 | RK3062 | Chip R | ERJ3GSYJ104V |
| R510 | RK3032 | Chip R | ERJ3GSYJ102V |
| R511 | RK3038 | Chip R | ERJ3GSYJ102V |
| R512 | RK3038 | Chip R | ERJ3GSYJ102V |
| R513 | RK3038 | Chip R | ERJ3GSYJ102V |
| R514 | RK3038 | Chip R | ERJ3GSYJ102V |
| R515 | RK3038 | Chip R | ERJ3GSYJ102V |
| R516 | RK4028 | Chip R | ERJ-12YJ151H |
| R517 | RK3026 | Chip R | ERJ3GSYJ101V |
| R518 | RK3026 | Chip R | ERJ3GSYJ101V |
| R519 | RK3018 | Chip R | ERJ3GSYJ220V |
| R520 | RK3026 | Chip R | ERJ3GSYJ101V |
| R521 | RK3052 | Chip R | ERJ3GSYJ153V |
| R522 | RK3066 | Chip R | ERJ3GSYJ224V |
| R523 | RK3046 | Chip R | ERJ3GSYJ472V |
| R524 | RK4029 | Chip R | ERJ-12YJ181H |
| R525 | RK3046 | Chip R | ERJ3GSYJ472V |
| R526 | RK0069 | Chip R | ERJ66EYJ104V |
| R527 | RC0065 | Chip R | ERJ66EYJ683V |
| R528 | RK3034 | Chip R | ERJ3GSYJ471V |
| R529 | RK3038 | Chip R | ERJ3GSYJ102V |
| R530 | RK0008 | Chip R | ERJ66EYJ330V |
| R531 | RK3023 | Chip R | ERJ3GSYJ560V |
| R532 | RK0008 | Chip R | ERJ66EYJ330V |
| R533 | RK3001 | Chip R | ERJ3GSY0R00V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|------------------|
| R534 | RD0108 | Resistor | JPM01 R-01 |
| RL501 | UL0006 | Relay | AG201344 |
| RL502 | UL0006 | Relay | AG201344 |
| RL503 | UL0006 | Relay | AG201344 |
| RL504 | UL0006 | Relay | AG201344 |
| RL505 | UL0006 | Relay | AG201344 |
| RL506 | UL0006 | Relay | AG201344 |
| RL508 | UL0006 | Relay | AG201344 |
| RL509 | UL0006 | Relay | AG201344 |
| RL510 | UL0006 | Relay | AG201344 |
| RL511 | UL0006 | Relay | AG201344 |
| RL512 | UL0006 | Relay | AG201344 |
| RL513 | UL0006 | Relay | AG201344 |
| RL514 | UL0010 | Relay | FBR2D012 |
| RL515 | UL0010 | Relay | FBR2D012 |
| SN501 | EU0001 | Surge absorber | DSA-301LA |
| TC501 | CT0035 | Trimmer | ECV1ZK20453T |
| TC502 | CT0035 | Trimmer | ECV1ZK20453T |
| W506 | UA1079 | Wire | ER- 2 |
| W507 | UA0050 | Power cord | FFC SMC0-1295-BD |
| W508 | UX1080 | Wire | ER- 3 |
| Y20042 | | | Adhes on G-17 lg |

| PA Unit | | | |
|----------|-----------|----------------|------------------|
| Ref. No. | Parts No. | Description | Parts Name |
| C601 | CU8042 | Chip C | C2012JB1C104KT-A |
| C602 | CU8042 | Chip C | C2012JB1C104KT-A |
| C603 | CU3006 | Chip C | C1608BH1H03KT-A |
| C604 | CU3012 | Chip C | C1608BH1H03KT-A |
| C606 | CU3029 | Chip C | C1608BH1H03KT-A |
| C607 | CU3023 | Chip C | C1608BH1H03KT-A |
| C608 | CU8042 | Chip C | C2012JB1C104KT-A |
| C609 | CU3035 | Chip C | C1608BH1H03KT-A |
| C610 | CE0350 | Electrolytic C | 16WV100HC |
| C611 | CU8042 | Chip C | C2012JB1C104KT-A |
| C612 | CU3035 | Chip C | C1608BH1H03KT-A |
| C613 | CU8002 | Chip C | C2012JB1H103KT-A |
| C614 | CU0089 | Chip C | C2012CH1H331J |
| C615 | CU8002 | Chip C | C2012JB1H103KT-A |
| C616 | CU9023 | Chip C | C3216GH1H121JT-A |
| C617 | CE0350 | Electrolytic C | 16WV100HC |
| C618 | CU8042 | Chip C | C2012JB1C104KT-A |
| C619 | CU3035 | Chip C | C1608BH1H03KT-A |
| C620 | CU7005 | Chip C | C2C31N2AC6330J |
| C621 | CU9009 | Chip C | C3216JB1H103KT-A |
| C622 | CU7038 | Chip C | C2C31N2AC6560J |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|--------------------|
| C623 | CU8032 | Chip C | C2012JBI1E223KT-A |
| C624 | CU8032 | Chip C | C2012JBI1E223KT-A |
| C625 | CU8032 | Chip C | C2012JBI1E223KT-A |
| C626 | CM0005 | Mica C | DM19 152J 500V |
| C627 | CU8032 | Chip C | C2012JBI1E223KT-A |
| C628 | CU8032 | Chip C | C2012JBI1E223KT-A |
| C629 | CU8032 | Chip C | C2012JBI1E223KT-A |
| C630 | CE0364 | Electrolytic C | 16MW470HC |
| C631 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C632 | CU3035 | Chip C | C1608JBI1H103KT-A |
| C634 | CM0004 | Mica C | DM19 102J 500V |
| C635 | CC5095 | Ceramic C | RCC12SL471-J-L66AU |
| C636 | CC5067 | Ceramic C | RCC05SL330J-L66AE |
| C638 | CU3035 | Chip C | C1608JBI1H103KT-A |
| C639 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C640 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C641 | CE0353 | Electrolytic C | 16MW470HC |
| C642 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C643 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C644 | CU3035 | Chip C | C1608JBI1H103KT-A |
| C645 | CU3035 | Chip C | C1608JBI1H103KT-A |
| C646 | CU3035 | Chip C | C1608JBI1H103KT-A |
| C647 | CE0343 | Electrolytic C | 16MW 1000HC+T |
| C648 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C649 | CU9009 | Chip C | C3216JBI1H103KT-A |
| C650 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C651 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C652 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C653 | CU3035 | Chip C | C1608JBI1H103KT-A |
| C654 | CE0201 | Electrolytic C | 16MW10S2 |
| C655 | CE0353 | Electrolytic C | 16MW470HC |
| C656 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C657 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C658 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C659 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C661 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C662 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C663 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C664 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C665 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C666 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C667 | CU8042 | Chip C | C2012JBI1E223KT-A |
| C668 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C669 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C670 | CU3047 | Chip C | C1608JBI1H103KT-A |
| C671 | CU3023 | Chip C | C1608CH1010JT-A |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|---------------|---------------------|
| C672 | CU3059 | Chip C | C1608JFE1042T-A |
| C673 | CU3059 | Chip C | C1608JFE1042T-A |
| CN608 | UE0071 | Connector | P122AQ5M |
| CN609 | UE0226 | Connector | B2B-PH-K-S |
| CP601 | UE0047 | Round Pin | RX110 |
| CP602 | UE0047 | Round Pin | RX110 |
| CP603 | UE0047 | Round Pin | RX110 |
| CP604 | UE0047 | Round Pin | RX110 |
| CP605 | UE0047 | Round Pin | RX110 |
| CP606 | UE0047 | Round Pin | RX110 |
| CP607 | UE0047 | Round Pin | RX110 |
| CP608 | UE0047 | Round Pin | RX110 |
| CP609 | UE0047 | Round Pin | RX110 |
| CP610 | UE0047 | Round Pin | RX110 |
| CP611 | UE0047 | Round Pin | RX110 |
| D601 | XD0263 | Diode | MA27-B |
| D602 | XD0039 | Diode | RLS4152 TE-11 |
| D606 | XD0039 | Diode | RLS4152 TE-11 |
| D607 | XD0265 | Diode | SG5LR |
| D608 | XD0231 | Diode | DAP202U T106 |
| D609 | XD0039 | Diode | RLS4152 TE-11 |
| D610 | XD0039 | Diode | RLS4152 TE-11 |
| D611 | XD0039 | Diode | RLS4152 TE-11 |
| D612 | XD0039 | Diode | RLS4152 TE-11 |
| F6601 | 0B0037 | Ferrite Beads | ZBF253D-00 |
| F6602 | 0B0037 | Ferrite Beads | ZBF253D-00 |
| F6603 | 0B0037 | Ferrite Beads | ZBF253D-00 |
| F6604 | 0B0037 | Ferrite Beads | ZBF253D-00 |
| F6605 | 0B0037 | Ferrite Beads | ZBF253D-00 |
| F6606 | 0B0038 | Ferrite Beads | EXCELSA39 |
| F6607 | 0B0008 | Ferrite Beads | HF30ACB201209-T |
| IC601 | XA0224 | IC | NJM2904M-T1 |
| J601 | IJ0030 | Jack | JPJ2545-01-510 |
| J602 | IJ0030 | Jack | JPJ2545-01-510 |
| L601 | OC0044 | Chip L | NL322522T-2R7J |
| L602 | OR0014A | Coil | Transformer OR0014A |
| L603 | OC0039 | Chip L | NL322522T-1R0J |
| L604 | OC0039 | Chip L | NL322522T-1R0J |
| L605 | OC0048 | Chip L | NL322522T-100J |
| L606 | OR0012 | Coil | Troidal Core OR0012 |
| L607 | OR0015 | Coil | Transformer OR0015 |
| L608 | OR0015 | Coil | Transformer OR0015 |
| L609 | OR0012 | Coil | Troidal Core OR0012 |
| L610 | OR0016 | Coil | Transformer OR0016 |
| L611 | OR0012 | Coil | Troidal Core OR0012 |
| 0607 | XI0176 | Transistor | UNX223-TX |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| 0608 | XI0176 | Transistor | UNX223-TX |
| 0609 | XI0078 | Transistor | UM521L-TX |
| 0610 | XI0078 | Transistor | UM521L-TX |
| R601 | RK3007 | Chip R | ERJ36SY0R00V |
| R602 | RK3028 | Chip R | ERJ36SYJ151V |
| R603 | RK3028 | Chip R | ERJ36SYJ471V |
| R604 | RK0020 | Chip R | ERJ66EYJ151V |
| R606 | RK4083 | Chip R | ERJ14YJ566H |
| R607 | RK4023 | Chip R | ERJ12YJ566H |
| R608 | RK0028 | Chip R | ERJ66EYJ471V |
| R609 | RK4030 | Chip R | ERJ12YJ221H |
| R610 | RK4030 | Chip R | ERJ12YJ221H |
| R611 | RK4055 | Chip R | ERJ14YJ470H |
| R612 | RK4055 | Chip R | ERJ14YJ470H |
| R614 | RK4014 | Chip R | ERJ66EYJ220V |
| R615 | RK4014 | Chip R | ERJ12YJ100V |
| R616 | RK4014 | Chip R | ERJ12YJ100V |
| R617 | R03007 | Resistor | ERX1S3R3 |
| R618 | R03007 | Resistor | ERX1S3R3 |
| R619 | R03007 | Resistor | ERX1S3R3 |
| R620 | R03007 | Resistor | ERX1S3R3 |
| R624 | RK4014 | Chip R | ERJ12YJ100V |
| R625 | RK4014 | Chip R | ERJ12YJ100V |
| R629 | RE0017 | Cement R | ERX3SJAR7 |
| R630 | RK0039 | Chip R | ERJ66EYJ222V |
| R631 | RK0039 | Chip R | ERJ66EYJ222V |
| R632 | RK0005 | Chip R | ERJ66EYJ220V |
| R633 | RK3026 | Chip R | ERJ36SYJ101V |
| R634 | RK3026 | Chip R | ERJ36SYJ101V |
| R635 | RK3026 | Chip R | ERJ36SYJ101V |
| R636 | RK0028 | Chip R | ERJ66EYJ471V |
| R637 | RK3058 | Chip R | ERJ36SYJ473V |
| R638 | RK3026 | Chip R | ERJ36SYJ101V |
| R639 | RK6024 | Chip R | ERJ14YJ680H |
| R640 | RK6020 | Chip R | ERJ14YJ330H |
| R641 | RK3070 | Chip R | ERJ36SYJ474V |
| R642 | RK3050 | Chip R | ERJ36SYJ103V |
| R643 | RK3054 | Chip R | ERJ36SYJ223V |
| R644 | RK3050 | Chip R | ERJ36SYJ103V |
| R645 | RK3053 | Chip R | ERJ36SYJ163V |
| R646 | RK3056 | Chip R | ERJ36SYJ333V |
| R647 | RK3048 | Chip R | ERJ36SYJ62V |
| R648 | RK3052 | Chip R | ERJ36SYJ153V |
| R649 | RK3044 | Chip R | ERJ36SYJ322V |
| R650 | RK3038 | Chip R | ERJ36SYJ102V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|--------------|-------------------|
| R651 | RK3001 | Chip R | ERJ36SY0R00V |
| R653 | RK3001 | Chip R | ERJ36SY0R00V |
| R654 | RK3026 | Chip R | ERJ36SYJ101V |
| R655 | RK0008 | Chip R | ERJ66EYJ330V |
| R656 | RK3042 | Chip R | ERJ36SYJ222V |
| R657 | RK3046 | Chip R | ERJ36SYJ472V |
| R658 | RK1107 | Chip R | ERJ66EY0R00 |
| R659 | RK3035 | Chip R | ERJ36SYJ561V |
| R660 | RK3026 | Chip R | ERJ36SYJ101V |
| R661 | RK3026 | Chip R | ERJ36SYJ101V |
| RL601 | UL0006 | Relay | AG201344 |
| RL602 | UL0012 | Relay | AJK3241 |
| RL603 | UL0016 | Relay | AG201344 |
| VR601 | RH0164 | Trim Pot | EW08MA03BE2 |
| VR602 | RH0165 | Trim Pot | EW08MA03BE3 |
| W601 | UX1081 | Wire | PA- 1 |
| W602 | UX1081 | Wire | PA- 1 |
| W604 | UX1081 | Wire | PA- 1 |
| W605 | UX1082 | Wire | PA 1 |
| W606 | UX1083 | Wire | PA- 2 |
| W607 | UX1084 | Wire | PA-FILTER 1 |
| TT1001 | TT1001 | Tube 0.7 1mm | Tube 0.7 1mm |
| TT1001 | TT1001 | Tube 0.7 1mm | Tube 0.7 1mm |
| TT1001 | TT1001 | Tube 0.7 1mm | Tube 0.7 1mm |
| TT1001 | TT1001 | Tube 0.7 1mm | Tube 0.7 1mm |
| UP0279 | | P. C. B | Transformer Board |
| UP0308 | | P. C. B | Circuit Board B |

FRONT

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|----------------|------------------|
| C1009 | CU3035 | Chip C | C1608JBH102KT-A |
| C1010 | CS0230 | Chip tantalum | TMCMA1E105MTR |
| C1011 | CU3059 | Chip C | C1608JF1E104ZT-A |
| C1014 | CU3017 | Chip C | C1608CHH330JT-A |
| C1015 | CU3017 | Chip C | C1608CHH330JT-A |
| C1016 | CU3059 | Chip C | C1608JF1E104ZT-A |
| C1017 | CE0351 | Electrolytic C | 16WVZ20S |
| C1018 | CU3047 | Chip C | C1608JBH103KT-A |
| C1019 | CE0315 | Electrolytic C | ECEY1CA70P |
| C1020 | CU3035 | Chip C | C1608JBH102KT-A |
| C1021 | CS0061 | Chip tantalum | TMCSA1Y22MTR |
| C1022 | CE0375 | Electrolytic C | 16VZ20S |
| C1023 | CU3035 | Chip C | C1608JBH102KT-A |
| C1024 | CE0375 | Electrolytic C | 16VZ20S |
| C1025 | CS0230 | Chip tantalum | TMCMA1E105MTR |
| C1026 | CU3047 | Chip C | C1608JBH103KT-A |
| C1027 | CU3043 | Chip C | C1608JBH102KT-A |
| C1028 | CE0315 | Electrolytic C | ECEY1CA70P |
| C1029 | CU3035 | Chip C | C1608JBH102KT-A |
| C1030 | CU3059 | Chip C | C1608JF1E104ZT-A |
| C1031 | CU3047 | Chip C | C1608JBH103KT-A |
| C1032 | CU3047 | Chip C | C1608JBH103KT-A |
| C1033 | CU3047 | Chip C | C1608JBH103KT-A |
| C1034 | CU3047 | Chip C | C1608JBH103KT-A |
| C1035 | CU3047 | Chip C | C1608JBH103KT-A |
| C1036 | CU3035 | Chip C | C1608JBH102KT-A |
| C1037 | CU3047 | Chip C | C1608JBH103KT-A |
| C1038 | CU3047 | Chip C | C1608JBH103KT-A |
| C1039 | CU3047 | Chip C | C1608JBH103KT-A |
| C1040 | CU3035 | Chip C | C1608JBH102KT-A |
| C1041 | CU3035 | Chip C | C1608JBH102KT-A |
| C1042 | CU3027 | Chip C | C1608CHH22JT-A |
| C1043 | CU3027 | Chip C | C1608CHH22JT-A |
| C1044 | CU3035 | Chip C | C1608JBH102KT-A |
| C1045 | CU3032 | Chip C | C1608JBH102KT-A |
| CN1001 | UE0222 | Connector | 235T-0890 |
| CN1002 | UE0265 | Connector | B1ZB-EH |
| CN1003 | UE0174 | Connector | B13B-ZR |
| CN1004 | UE0165 | Connector | R4B-ZR |
| D1002 | XL0043 | LED | CL-170R-CD-T |
| D1003 | XL0042 | LED | CL-170G-CD-T |
| D1004 | X00230 | Diode | DAN202U T106 |
| D1005 | X00230 | Diode | DAN202U T106 |
| D1007 | X00230 | Diode | DAN202U T106 |
| D1008 | X00254 | Diode | 1SS355 TE-17 |
| D1009 | X00230 | Diode | DAN202U T106 |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|----------------|
| D1010 | X00230 | Diode | DAN202U T106 |
| D1011 | X00230 | Diode | DAN202U T106 |
| D1016 | X00254 | Diode | 1SS355 TE-17 |
| D1017 | X00254 | Diode | 1SS355 TE-17 |
| D1018 | X00160 | Diode | DTZ4_3B T111 |
| D1019 | X00254 | Diode | 1SS355 TE-17 |
| D1020 | X00230 | Diode | DAN202U T106 |
| D1021 | X00230 | Diode | DAN202U T106 |
| D1022 | X00254 | Diode | 1SS355 TE-17 |
| D1024 | X00230 | Diode | DAN202U T106 |
| D1025 | X00230 | Diode | DAN202U T106 |
| D1026 | X00230 | Diode | DAN202U T106 |
| D1027 | X00230 | Diode | DAN202U T106 |
| D1028 | X00230 | Diode | DAN202U T106 |
| D1029 | X00230 | Diode | DAN202U T106 |
| D1030 | X00230 | Diode | DAN202U T106 |
| IC1001 | XA0296 | IC | MC14011BF |
| IC1002 | XA0347 | IC | TC4030BF |
| IC1003 | XA0299 | IC | BU4001BF |
| IC1004 | XA0295 | IC | MC14024BF |
| IC1005 | XA0351 | IC | Z4LC16B |
| IC1006 | XA0393 | IC | CPU DX-70 |
| IC1007 | XA0338 | IC | L78L05B-TL/TR |
| IC1008 | XA0075 | IC | NJM78L08UA-TE1 |
| IC1009 | XA0303 | IC | LC15821M |
| L1001 | OC0469 | Chip L | L04H4221J04 |
| LC0100P | EL0027 | LCD | LCD DX70 |
| PL1001 | EP0009 | Lamp | 90031-20805A |
| PL1002 | EP0009 | Lamp | 80031-20805A |
| PL1003 | EP0009 | Lamp | 80031-20805A |
| PL1004 | EP0009 | Lamp | 80031-20805A |
| O1001 | XT0094 | Transistor | Z5A15761106R |
| O1002 | XU0061 | Transistor | UN5211-TX |
| O1003 | XT0095 | Transistor | Z5B113211000 |
| O1004 | XT0095 | Transistor | Z5C4081106R |
| O1005 | XT0095 | Transistor | Z5C4081106R |
| O1006 | XU0061 | Transistor | UN5211-TX |
| O1009 | XU0061 | Transistor | UN5211-TX |
| O1010 | XU0061 | Transistor | UN5211-TX |
| O1011 | XU0061 | Transistor | UN5211-TX |
| R1005 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1006 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1007 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1008 | RK3056 | Chip R | ERJ3GSYJ473V |
| R1009 | RK3056 | Chip R | ERJ3GSYJ473V |
| R1010 | RK3062 | Chip R | ERJ3GSYJ104V |

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|--------------|
| R1011 | RK3056 | Chip R | ERJ3GSYJ224V |
| R1012 | RK3062 | Chip R | ERJ3GSYJ104V |
| R1013 | RK3074 | Chip R | ERJ3GSYJ05V |
| R1014 | RK3052 | Chip R | ERJ3GSYJ53V |
| R1015 | RK3054 | Chip R | ERJ3GSYJ23V |
| R1016 | RK3052 | Chip R | ERJ3GSYJ04V |
| R1017 | RK3056 | Chip R | ERJ3GSYJ224V |
| R1018 | RK3052 | Chip R | ERJ3GSYJ104V |
| R1019 | RK3074 | Chip R | ERJ3GSYJ05V |
| R1020 | RK3052 | Chip R | ERJ3GSYJ53V |
| R1021 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1022 | RK3054 | Chip R | ERJ3GSYJ23V |
| R1023 | RK3074 | Chip R | ERJ3GSYJ05V |
| R1024 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1026 | RK3056 | Chip R | ERJ3GSYJ03V |
| R1027 | RK3056 | Chip R | ERJ3GSYJ03V |
| R1028 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1029 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1030 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1031 | RK0130 | Chip R | ERJ6GEYJ4R7V |
| R1032 | RK3046 | Chip R | ERJ3GSYJ472V |
| R1033 | RK3000 | Chip R | ERJ3GSYJ221V |
| R1034 | RK3038 | Chip R | ERJ3GSYJ02V |
| R1035 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1036 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1037 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1038 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1039 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1040 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1041 | RK3050 | Chip R | ERJ3GSYJ03V |
| R1042 | RK3044 | Chip R | ERJ3GSYJ332V |
| R1043 | RK3058 | Chip R | ERJ3GSYJ473V |
| R1044 | RK3058 | Chip R | ERJ3GSYJ473V |
| R1045 | RK3050 | Chip R | ERJ3GSYJ102V |
| R1046 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1047 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1048 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1049 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1050 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1051 | RK3038 | Chip R | ERJ3GSYJ02V |
| R1052 | RK3047 | Chip R | ERJ3GSYJ562V |
| R1053 | RK3046 | Chip R | ERJ3GSYJ472V |
| R1054 | RK3056 | Chip R | ERJ3GSYJ103V |
| R1055 | RK3038 | Chip R | ERJ3GSYJ102V |
| R1056 | RK3034 | Chip R | ERJ3GSYJ471V |

FRONT

| Ref. No. | Parts No. | Description | Parts Name |
|----------|-----------|-------------|------------------|
| R1057 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1058 | RK3038 | Chip R | ERJ3GSYJ102V |
| R1059 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1060 | RK3026 | Chip R | ERJ3GSYJ101V |
| R1061 | RK3030 | Chip R | ERJ3GSYJ221V |
| R1062 | RK3042 | Chip R | ERJ3GSYJ222V |
| R1063 | RK3030 | Chip R | ERJ3GSYJ221V |
| R1064 | RK3050 | Chip R | ERJ3GSYJ103V |
| R1065 | RK3038 | Chip R | ERJ3GSYJ102V |
| R1066 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1067 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1068 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1069 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1070 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1071 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1072 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1073 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1074 | RK3034 | Chip R | ERJ3GSYJ471V |
| R1075 | RK3034 | Chip R | ERJ3GSYJ221V |
| R1076 | RK3030 | Chip R | ERJ3GSYJ473V |
| R1077 | RK3058 | Chip R | ERJ3GSYJ05V |
| R1079 | RK3074 | Chip R | ERJ3GSY0R00V |
| R1080 | RK3001 | Chip R | ERJ3GSY0R00V TOT |
| R1081 | RK3001 | Chip R | ERJ3GSY0R00V |
| R1083 | RK3001 | Chip R | ERJ3GSY0R00V |
| R1087 | RK3001 | Chip R | ERJ3GSY0R00V |
| R1093 | RK3001 | Chip R | ERJ3GSY0R00V |
| R1094 | RK3062 | Chip R | ERJ3GSYJ1C4V |
| R1095 | RK3062 | Chip R | ERJ3GSYJ1E4V |
| R1096 | RK3062 | Chip R | ERJ3GSYJ1C4V |
| R1098 | RK3050 | Chip R | ERJ3GSYJ103V |
| S1001 | UR0009 | Switch | EC1B15204 |
| S1002 | UR0010 | Switch | EC24B5080 |
| SW1001 | U00020 | Switch | JPM1110-0101 |
| SW1002 | U00020 | Switch | JPM1110-0101 |
| SW1003 | U00020 | Switch | JPM1110-0101 |
| SW1004 | U00020 | Switch | JPM1110-0101 |
| SW1005 | U00020 | Switch | JPM1110-0101 |
| SW1006 | U00020 | Switch | JPM1110-0101 |
| SW1007 | U00020 | Switch | JPM1110-0101 |
| SW1008 | U00020 | Switch | JPM1110-0101 |
| SW1009 | U00020 | Switch | JPM1110-0101 |
| SW1010 | U00020 | Switch | JPM1110-0101 |
| SW1011 | U00020 | Switch | JPM1110-0101 |
| SW1012 | U00020 | Switch | JPM1110-0101 |

| Ref. No. | Parts No. | Description | Parts Name |
|----------------|-----------|-------------|-----------------------|
| SW1013 | U0020 | Switch | JPM1110-0101 |
| SW1014 | U0020 | Switch | JPM1110-0101 |
| W1001 | R00108 | Resistor | JPW01 R-01 |
| W1002 | R00108 | Resistor | JPW01 R-01 |
| W1003 | R00108 | Resistor | JPW01 R-01 |
| W1001 | X80019 | Crystal | CSAGS8 600MT |
| DG0 | | | LCD Light |
| F00192 | | | LCD Rubber Connector |
| F00192 | | | LCD Rubber Connector |
| F00192 | | | LCD Rubber Connector |
| F00192 | | | LCD Rubber Connector |
| H0105A | | | LCD Holder |
| TL0014 | | | LCD Filter |
| TL0015 | | | LCD Filter |
| TT1002 | | | Tube 1.0 13V |
| TT1002 | | | Tube 1.0 13V |
| TT1002 | | | Tube 1.0 13V |
| TT1002 | | | Tube 1.0 13V |
| TZ0028 | | | VOL Spacer |
| UP028B | P. C. B | | FRONT Circuit Board B |
| VOL | | | |
| C1001 | CU3047 | Chip C. | C1608-JBIH103KT-A |
| CN1005 | UE0223 | Connector | 53263-0890 |
| D1001 | XD0254 | Diode | 1SS355 TE-17 |
| R1001 | RK3057 | Chip R | ERJ3G3YJ393V |
| R1002 | RK3029 | Chip R | ERJ3G3YJ181V |
| R1003 | RK3053 | Chip R | ERJ3G3YJ183V |
| R1004 | RK3041 | Chip R | ERJ3G3YJ182V |
| VR1001 | RV0027 | Trim Pot | RK972210(10KBC) |
| VR1002 | RV0022 | Trim Pot | RK972210(10KB42) |
| Speaker | | | |
| SP1 | ES0013 | Speaker | VS-66-Y0811-2.0W |
| W3 | UX1047 | Wire | Harness DR130 |
| Other | | | |
| F001 | EF0011 | Fuse | F0M125V-5A |
| FH001 | UH0014 | Fuse holder | PFC5000-0301 |
| FH002 | UH0014 | Fuse holder | PFC5000-0301 |
| W1 | UX1076 | Wire | FRONT- 1 |
| W2 | UX1077 | Wire | FRONT- 2 |
| ET1008 | | Fan Motor | FBA 06T12HF |
| TZ0066 | | Attachment | 25C1971-01 Attachment |
| UE0255 | | Connector | FH-M D. R. (4) |
| UX1085 | | Connector | ACC Connector |

| Ref. No. | Parts No. | Description | Parts Name |
|-------------------------|-----------|--------------------|------------|
| XT0046 | Z5C1972 | Transistor | Z5C1972 |
| XT0101 | Z5C1971 | Transistor | Z5C1971 |
| XT0127 | Z5C3419-Y | Transistor | Z5C3419-Y |
| XT0128 | Z5C2904 | Transistor | Z5C2904 |
| YZ0001 | | Silicon Grease | |
| Mechanical Parts | | | |
| AA0007 | | Screw M2. 6+6FeCr | |
| AA0024 | | Screw M3+6FeN | |
| AA0050 | | Screw 2.6+6FeBC | |
| AA0057 | | Screw M2. 6+6FeCr | |
| AA0059 | | Screw M2. 6+6FeN | |
| AA0060 | | Screw M4+20FeCr | |
| AA0061 | | Screw M2. 6+6BC | |
| AD0005 | | Screw M4+10FeCr | |
| AF0005 | | Screw M2+3. 5FeN | |
| AJ0015 | | Screw 2. 6+6FeCr | |
| AJ0017 | | Screw 2. 6+6FeBG | |
| AJ0029 | | Screw 3+6FeCr | |
| AN0012 | | Dial Nut | |
| AP0022 | | Screw 2. 6+12BC | |
| AZ0031 | | Washer | |
| FF0015 | | Light Shield Cloth | |
| FF0031 | | Cloth 7*30 | |
| FF0032 | | Pad | |
| FF0147 | | Rubber | |
| F00197 | | SP Cushion | |
| F00206 | | TONE UNIT Cushion | 70T |
| F00216 | | IC Spring | |
| F00083 | | Washer | |
| F00102 | | IC Spring | |
| F00103 | | SP Angle | |
| F00104 | | Fan Cover Angle | |
| F00106 | | FRONT Angle B | |
| F00107 | | FRONT Angle U | |
| F00108 | | Connector Angle | |
| FF0004 | | Bind Wire | |
| KM0195 | | Shassis Case | |
| K20027 | | Top Case | |
| K20028 | | FRONT Panel S | |
| K20029 | | M. Dial Knob | |
| K20030 | | FRONT Cover S | |
| K20032 | | Under Case T | |
| NK0043 | | VOL Knob | |
| NK0044 | | SOL Knob | |
| NK0045 | | SUB Dial Knob | |

| Ref. No. | Parts No. | Description | Parts Name |
|----------------|-----------|------------------------------|------------|
| SP0008 | | Earthing Spring | |
| SP0009 | | M. Dial Spring | |
| SS0066 | | Chassis | |
| SS0067 | | Filter P.B. Chassis | |
| SS0068 | | Chassis | |
| SS0069 | | FRONT Chassis | |
| TS0042A | | VCO Cover | |
| TS0104 | | Fan Shield | |
| TS0105 | | Filter Shield | |
| Packing | | | |
| F00598A | | MIC Hanger Unit | |
| 0S0352A | | Specifications Card 70 | |
| 0S0362A | | Specifications Card 70T | |
| EHM42 | | MIC Packing | |
| FP0099 | | Indicate Seal | |
| FP0100 | | Seal 70 | |
| HK0385 | | Item Carton | |
| HM0148 | | Item Carton T | |
| HP0002 | | Protection Bag (Instr. Card) | |
| HP0039 | | Protection Bag (Radio) | |
| HU0080 | | Fixture(A) | |
| HU0081 | | Fixture(B) | |
| HU0082 | | Fixture(C) | |
| HU0084 | | Fixture T | |
| HU0088 | | Fixture(D) | |
| PH0009 | | Registration Card T 70T | |
| PK0060 | | Schematic Diagram | |
| PR0237 | | FCC Part 15 Seal 70T | |
| PR0287 | | F Seal 70T | |
| PR0288 | | Seal | |
| PS0221 | | Instruction Card T | |
| PT0004A | | Lot Number Seal | |
| UAK052 | | Power Cord | |


ADJUSTMENT

1) PA unit Adjustment


Required Test Equipment

1. Digital voltage meter
2. DC current meter
300~500mA
3A
3. DC regulated power supply
13.80V 25A or more
(should be equipped with 20~25A current limit and current meter)
100W (1.9~30MHz)
4. Power meter
5. Linear detector
6. SG or RF generator
1.9~60MHz, -10~+10dBm


PA Unit Adjustment Points

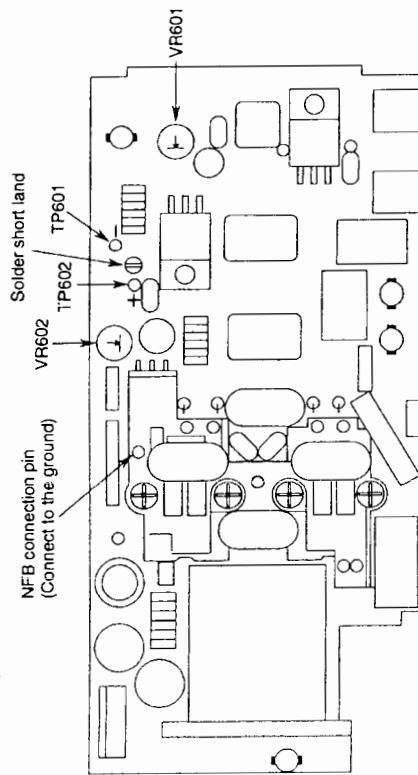


Filter Unit Adjustment Points

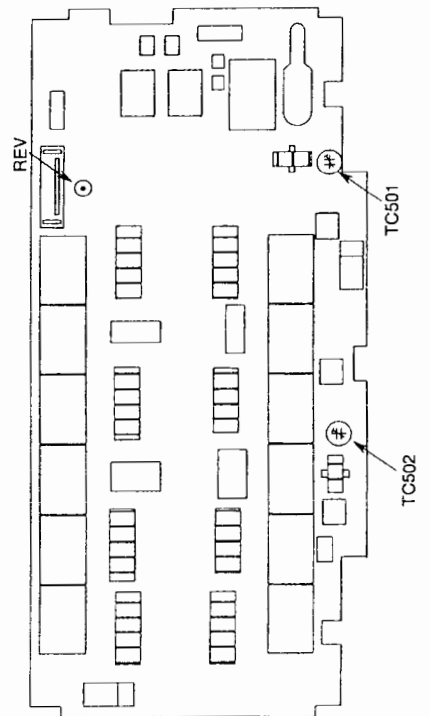

Idle Current Adjustment Setting

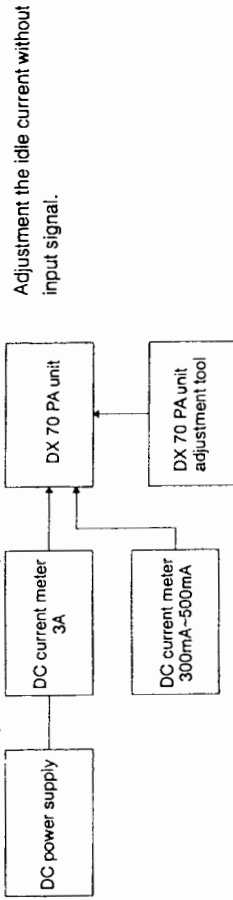

SWR Adjustment Setting

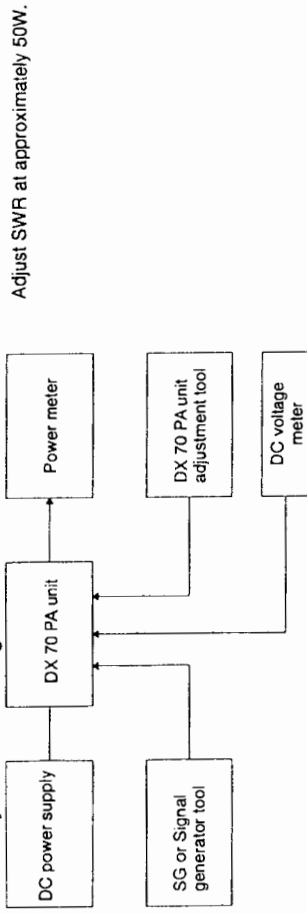

PA Adjustment

| Item | Condition | Measurement | | Adjustment | | |
|---|---|----------------------------|--------------------------------|------------|-------|---|
| | | Equipment | Terminal | Unit | Parts | Method |
| Idling current 2SC1972 x 2 | SSG: OFF Mode: USB VR601, 602: min. | Current Meter 300~500mA | TP601 ⊖ | PA | VR601 | Desolder the short-land Connect the current meter between TP601 and TP602, then adjust VR601 to 100mA. Solder the short-land |
| | | | TP602 ⊕ | | | |
| Idling current 2SC2904 x 2 | SSG: OFF Mode: USB | Current Meter 3A | CN605 unit total current | PA | VR602 | Connect terminal pin of NFB unit to the ground, check the total current in transmission mode. Then remove terminal pin from ground, adjust VR602 to increase 300mA. |
| | | | | | | |
| Connect TP1 and TP2 by soldering after adjusting. | | | | | | |
| SWR detection | f=1.9MHz SG ->PA unit | Voltage Meter | REV | Filter | TC501 | Adjust the output power to 50W, then adjust the TC501 so that REV voltage is min. |
| | | | | | | f=52MHz |

When you adjust the finished goods, set the mode to SSB, adjust the input level of microphone, and set the output power to about 50W. (To protect from accidental damage). Then proceed to "8) Transmission Adjustment".

2) PLL Adjustment

Required Test Equipment

1. Digital voltage meter
2. DC regulated power supply
3. Frequency counter
4. Spectrum Analyzer
5. Oscilloscope


13.80V 5A or more

500MHz or more

1GHz or more

100MHz or more

PLL Unit Adjustment Points

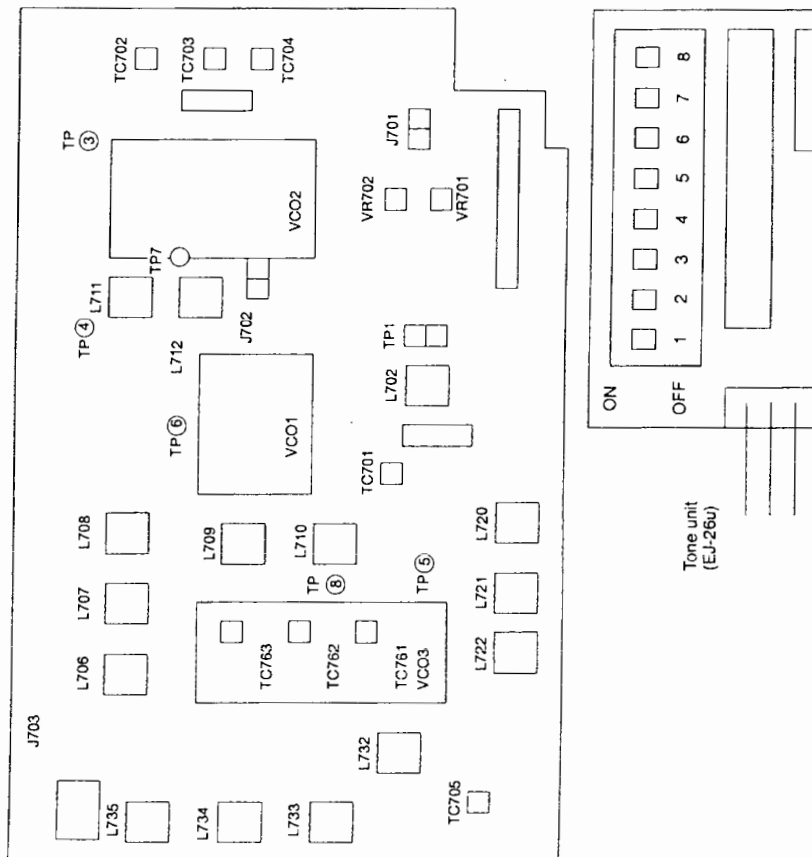

| Item | Condition | Measurement | | | Adjustment | | |
|---|--------------|----------------|------|-------------|--------------|--|--|
| | | Equipment | Unit | Terminal | Parts | Method | |
| VCO1 Frequency | PD1=1.2V | Freq. Counter | VCO1 | CN80 1-3 | | 175MHz or above | |
| | PD1=4.3V | | | | | 155MHz or below | |
| | PD1=1.5-4V | Freq. Counter | VCO2 | CN90 2-4 | | VCO2 freq.: 71MHz | |
| Attach the VCO to PLL, then adjust the unit after installing the PLL to the unit. | | | | | | | |
| VCO2 Lock range | f=7.100MHz | Digital tester | PLL | TP7 | Check | 1.5V-4V | |
| VCO1 Lock range | f=7.0999MHz | | | TP6 | | 1V-3V | |
| | f=7.1000MHz | | | | | 3V-4.3V | |
| VCO3 Lock range | f=0.1500MHz | | | TP8 | TC961 | 2.5V | |
| | f=10.4999MHz | | | | TC961 | When the voltage is 6.45V or below, adjust the unit to 6.5V again. (6.45V-7.0V) | |
| | f=10.5000MHz | | | | TC962 | 2.5V | |
| | f=21.4999MHz | | | | TC962 | When the voltage is 6.45V or below, adjust the unit to 6.5V again. (6.45V-7.0V) | |
| | f=21.5000MHz | | | | TC963 | 2.5V | |
| 2nd LO Level | f=7.100MHz | Oscilloscope | | TP4 | Check | 6.5V or below | |
| 1st LO Level | f=7.100MHz | | | TP5 | L711 L712 | Turn the coils to the max. repeatedly. | |
| | f=7.100MHz | | | | L709 L710 | Turn the coils to the max. repeatedly. | |
| | f=7.100MHz | | | | L706 L707 | Turn the coils to the max. repeatedly. | |

3) Tone Unit Adjustment

- 1 Attach EJ26U to DX70.
- 2 When the subaudible Tone is ON in FM mode, adjust the unit according to following table.
- 3 When the subaudible Tone is OFF in FM mode, the tone should not be emitted.

| Item | Condition | Measurement | | | Adjustment | | |
|--|--------------------------|-------------------|------|------------------------------|--|------------------------|------|
| | | Equipment | Unit | Terminal | Parts | Method | |
| Frequency (Mode) | RX LSB | Freq. Counter | PLL | TP3 | TC702 | 9873.60kHz +/- 0.02kHz | |
| | RX USB | | | | TC704 | 9876.40kHz +/- 0.02kHz | |
| | RX AM and FM | | | | TC703 | 9875.00kHz +/- 0.02kHz | |
| | RX CWU | | | | Check | 9875.60kHz +/- 0.3kHz | |
| | RX CWL | | | | | 9874.20kHz +/- 0.3kHz | |
| Frequency (IF Shift) | RX LSB | Spectrum Analyzer | PLL | J701 | VR702 | 453.60kHz +/- 0.1kHz | |
| | TX LSB | | | | VR701 | 453.60kHz +/- 0.01kHz | |
| | RX LT, (IF Shift center) | | | | Check | 453.30kHz +/- 0.2kHz | |
| | TX LT, (IF Shift center) | | | | | 453.50kHz +/- 0.2kHz | |
| | RX UT, (IF Shift center) | | | | | 456.70kHz +/- 0.2kHz | |
| | TX UT, (IF Shift center) | | | | | 456.50kHz +/- 0.2kHz | |
| | Frequency f=7.100MHz, FM | | | | | | J703 |
| Level f=7.100MHz, USB | | | J701 | Check | -6-0dBm I=456.4kHz | | |
| Level f=7.100MHz, USB | | | J702 | | 1-6dBm I=71.295MHz | | |
| Level f=53.9999MHz | | | J703 | L720 L721 L722 | Turn the coils to the max. repeatedly. f=123.75MHz | | |
| Level f=53.9999MHz | | | | L732 L733 L734 L745 | Turn the coils to the max. repeatedly f=123.75MHz 1-6dBm | | |
| Spurious f=53.9999MHz | | | | TC705 | Spurious min. (60dB or more) | | |
| Level f=150kHz f=10.400MHz f=10.500MHz f=21.400MHz f=21.500MHz f=29.9999MHz | | | | Check | Level: 2-6dBm +/-2dB | | |


| Item | Condition | Measurement | | | Adjustment | | |
|----------------|---|---------------|-----------|-------------|------------|---------------|---|
| | | Equipment | Unit | Terminal | Parts | Method | |
| Tone Frequency | 250.3Hz 1 2 3 4 5 6 7 8 • • • • • • • • | Freq. Counter | EJ26 u | CN99 1-1 | | 249.6-251.0Hz | |
| | Tone Frequency | | | | | | 156.3Hz 1 2 3 4 5 6 7 8 • • • • • • • • |
| Tone Level | 156.3Hz 1 2 3 4 5 6 7 8 • • • • • • • • | Oscilloscope | EJ26 u | CN99 1-1 | | 1.8-3.0V p-p | |
| | Tone Level | | | | | | 156.3Hz 1 2 3 4 5 6 7 8 • • • • • • • • |
| Tone Level | 156.3Hz 1 2 3 4 5 6 7 8 • • • • • • • • | Oscilloscope | EJ26 u | CN99 1-1 | | 3.8-4.8V p-p | |
| | Final Setting | | | | | | 88.5Hz 1 2 3 4 5 6 7 8 • • • • • • • • |

* indicates the number is ON.


Required Test Equipment

1. Digital voltage meter
2. DC regulated power supply
3. SG
13.80V 3A or more
about 200MHz
4. Distortion meter, AF voltage meter
5. 8Ω speaker
6. Oscilloscope
7. (NB adjustment tool)

Main Unit Adjustment Setting

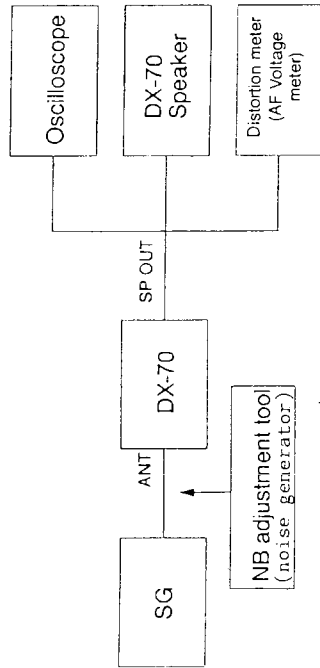

Main Unit Adjustment Points

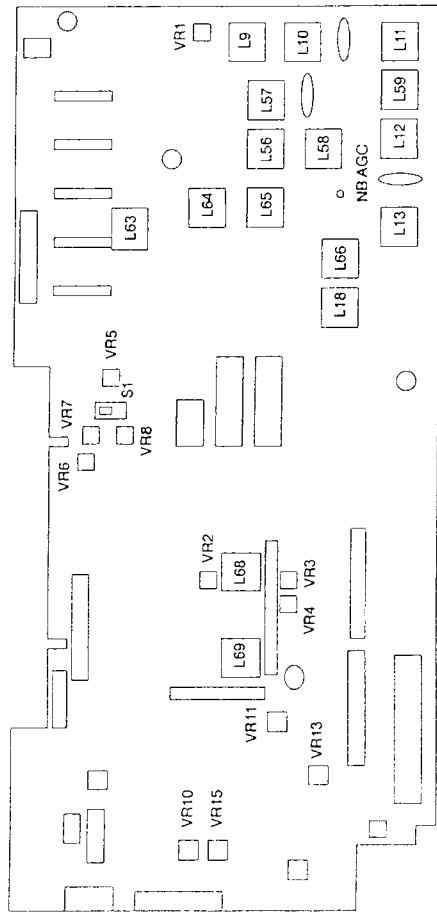

4) Sensitivity Adjustment

SG Output Frequency: 14.1000MHz
 Frequency: 14.0993MHz
 RF Gain: +10dB
 Filter: Wide

Connect to HF Antenna Terminal.
 RIT: OFF
 AGC: FAST
 NB: OFF

Mode: USB
 ΔF: Center

Squeich VR: Turn the knob counterclockwise fully.

| Item | Condition | Measurement | | | Adjustment | |
|--------|---|------------------|----------|------|------------|--|
| | | Equipment | Terminal | Unit | Parts | Method |
| Tuning | SG output: 0dBμ Mod: OFF AF output: 300mV | Audio Voltmeter | SP | Main | L56 | Adjust every following group repeatedly to obtain the maximum receiving signal; L56, 57, 58 L59, 12, 13 L66 L68, L69 |
| | | | | | L57 | |
| | | | | | L58 | |
| | Mode: FM f=14.1000MHz SG output: 0dBμ Mod: 1kHz, 3.5kHzDEV | Distortion Meter | | | L59 | Adjust repeatedly to obtain the maximum SINAD. SINAD should be 13dB or more. |
| | | | | | L12 | |
| | | | | | L13 | |
| | SG output: 60dBμ 1kHz, 3.5kHzDEV | | | | Check | SINAD should be 30dB or more. If SINAD is below 30dB, adjust L59, L12 and L13 again. |
| | | | | | Check | Make sure that S/N is 10.5dB or more by turning ON/OFF SG output. |
| | SG output: -6dBμ Mod: OFF Mode: USB f=14.0993MHz AF output: 300mV | | | | Check | Make sure that S/N is 10.5dB or more by turning ON/OFF SG output. |
| | | | | | Check | Make sure S/N is 10dB or more by turning ON/OFF SG modulation. |

5) Noise Blanker Adjustment

SG Output Frequency: 14.1000MHz Connect to HF Antenna Terminal.
 Frequency: 14.0993MHz Mode: USB RIT: OFF AGC: FAST NB: OFF
 RF Gain: +10dB ΔF: Center Squelch VR: Turn the knob counterclockwise fully.
 Filter: Wide

| Item | Condition | Measurement | | | Adjustment | |
|--------|--|--------------|---------------|------|-------------------|--|
| | | Equipment | Terminal | Unit | Parts | Method |
| Tuning | SG output: 0dBμ Mod: OFF Mode: USB f=14.0993MHz NB: ON RF Gain: +10dB | Oscilloscope | NB AGC (MAIN) | Main | L63 L64 L65 | Adjust the coils, and set DC voltage of the terminal to the minimum with the oscilloscope. |

6) S Meter Adjustment

| Item | Condition | Measurement | | | Adjustment | |
|---------------|---|--------------|-------------------------------|------|-----------------------|--|
| | | Equipment | Terminal | Unit | Parts | Method |
| RX Total Gain | SG output: 40dBμ Mod: OFF Mode: USB f=14.0993MHz RF Gain: 0dB | AF Voltmeter | SP | Main | VR2 | Adjust SP output by setting the AF gain to about 1V. The output level should be 0dB. Adjust only the noise output to -28dB by turning OFF SG output. |
| S Meter | SG output: 20dBμ Mod: OFF SG output: 40dBμ SG: OFF | S Meter | S Meter | | VR10 VR15 Check | The indicator between first and second digits is turned ON. The 9th digit starts flashing. Adjust VR10 and VR15 repeatedly. S Meter is not turned ON. |
| Squelch | SG: OFF | | BUSY RX LED (Green) AF output | | Check | Turn the Squelch VR to make sure that the squelch closes at about 10 o'clock. |

7) Receiving Function Adjustment


SG Output Frequency: 14.1000MHz Connect to HF Antenna Terminal.
 Frequency: 14.0993MHz Mode: USB RIT: OFF AGC: FAST NB: OFF
 RF Gain: +10dB ΔF: Center Squelch VR: Turn the knob counterclockwise fully.
 Filter: Wide

| Item | Condition | Measurement | | | Adjustment | |
|-------------------|---|------------------|----------|------|------------|---|
| | | Equipment | Terminal | Unit | Parts | Method |
| AGC | SG output: 40dBμ Output: ON/OFF Mod: OFF | | S Meter | | Check | Switch AGC. When SG is turned OFF, the meter moves slowly in SLOW, and fast in FAST. |
| RF GAIN | SG output: 40dBμ | | S Meter | | Check | Switch the RF GAIN from +10dB ordinarily, the meter swings shorter and shorter. |
| FILTER Switching | Output: OFF Mode: USB, AM, CW | | | | Check | Switch the FILTER in every mode (except FM), the noise sound should be changed. |
| Band Sensitivity | SG output: -6dBμ f=1.9000MHz f=3.6000MHz f=7.0000MHz f=10.1000MHz f=21.1000MHz f=28.1000MHz Mode: USB or LSB | Audio Voltmeter | SP | | Check | In USB mode, SG frequency is -700Hz. In LSB mode, SG frequency is +700Hz. Make sure that S/N is 10dB or more. |
| 50MHz Sensitivity | Connect SG to 50MHz antenna terminal. SG output: -10dBμ SG freq.: 52.1000MHz Mode: USB f=52.0993MHz | Distortion Meter | | | Check | S/N is 10.5dB or more when turning ON/OFF SG output. |
| | SG output: -4dBμ Mod: 1kHz, 3.5kHzDev Mode: FM f=52.0000MHz | | | | Check | SINAD: 13dB or more |

Required Test Equipment

1. Digital voltage meter
2. DC current meter
3. DC regulated power supply
20-30A
13.80V 25A or more
(should be equipped with 20-25A current limit)
100W (1.9-30MHz)
4. Power meter
10W (1.9-60MHz or more)
5. Linear detector
6. AF generator (600Ω)
7. AF voltage meter
8. Oscilloscope
9. Electronic keyer (CW telegraphy key)
10. TUNE operation tool

TX Adjustment Setting

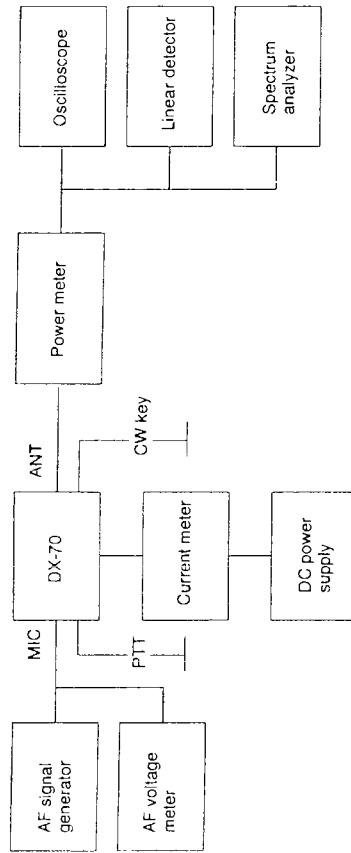

8) Transmission Adjustment

Connect the power meter to HF antenna terminal.
 Frequency: 7.1000MHz Mode: USB Power: High
 Speech Compressor (SET mode): OFF FM-TONE: OFF

| Item | Condition | Measurement | | Adjustment | | |
|------------------------|--|-----------------|------------------------|------------|-------|---|
| | | Equipment | Terminal | Unit | Parts | Method |
| Tuning | Slide S1 to rear panel side. AG output: -50dBm | Power Meter | HF Antenna Terminal | Main | L18 | Adjust to the maximum power. (Adjust the AG input level so that the power becomes the maximum at about 50W. |
| | | | | | L11 | |
| L10 | | | | | | |
| L9 | | | | | | |
| Current Limit | AG output: OFF Mode: FM Set VR7 to 9 o'clock. Set VR6 to 3 o'clock. | Current Meter | Power Supply Terminal | Main | VR6 | Turn VR6 counterclockwise so that the total current becomes 20A. Be careful not to run much current for short time. |
| | | | | | VR7 | Turn VR7 clockwise to decrease the power, then adjust to 100W. |
| Power | Mode: FM Slide S1 to front panel side. Slide S1 to rear panel side. Operate TUNE with tool. | Power Meter | HF Antenna Terminal | Main | VR5 | Turn VR5 to obtain the power of 50W. |
| | | | | | VR8 | Turn VR8 to obtain the power of 10W. |
| | | | | | TC502 | Set the power to 10W or approximate value. 10W +/- within 1W |
| | | | | | VR13 | Adjust the maximum frequency deviation to 4.3kHz. |
| FM Frequency Deviation | AG output: -30dBm f: 52.0000MHz Mode: FM FM-TONE: ON (only the unit equipped with TONE) | Linear Detector | 50MHz Antenna Terminal | Filter | Check | The frequency deviation is increased. (Approx. 5kHz) |

9) Spurious Adjustment

Connect the power meter to HF or 50MHz antenna terminal.
 Frequency: 52.000MHz Mode: FM Power: High
 Speech Compressor (SET mode): OFF FM-TONE: OFF


Connect the power meter to 50MHz antenna terminal.
 Frequency: 52.000MHz Mode: USB Power: High
 Speech Compressor (SET mode): OFF FM-TONE: OFF

| Item | Condition | Measurement | | Adjustment | | |
|------------------|--|-------------------------|------------------------|------------|-----------------|---|
| | | Equipment | Terminal | Unit | Parts | Method |
| Spurious Balance | AG output: OFF Mode: FM FM-TONE: OFF f: 52.000MHz | ATT + spectrum Analyzer | 50MHz Antenna Terminal | Main | VR1 | Balance the spurious to obtain the minimum value. -60dB or below |
| | HF Antenna Terminal | | | | | |
| Spurious | AG output: OFF Mode: FM Band (MHz): 1.9, 3.5, 10, 14, 18, 21, 24, 28 | | | | L9 | Adjust so that the value is within the regulation. (Adjust L9 when the spurious is not -52dB or below in 24/28MHz band.) |
| | | | | | | |
| Carrier Balance | AG output: OFF Mode: LSB/USB | | | | Check (VR3 VR4) | -50dB or below (Adjust VR3 and VR4 when the carrier suppression is not -50dB or below.) |
| | | | | | | |
| Modulation | Mode: CW Keying: OFF f: 53.99MHz | | | | Check | -60dB or below |
| | Mode: FM, AM, USB/LSB Connect the microphone. | | | | | Monitor Transceiver |


| Item | Condition | Measurement | | Adjustment | | |
|-----------------|---|--------------------------------|------------------------|------------|---|--|
| | | Equipment | Terminal | Unit | Parts | Method |
| Filter Tuning | AG output: -30dBm Mode: FM FM-TONE: OFF | Oscilloscope (Linear Detector) | 50MHz Antenna Terminal | Main | L11 L10 L9 | Set the AM modulation factor to the minimum. It should be 5% or below. |
| | HF Antenna Terminal | | VR3 VR4 | | Adjust VR3 and VR4 so that the carrier suppression is 50dB (1/300) or below at 100W. The carrier suppression should be decreased in both USB and LSB. | |
| Carrier Balance | AG output: OFF f: 7.1000MHz Mode: LSB/USB | Oscilloscope | | | Check | Make sure of the wave form. The wave form of rise and fall should be symmetry. (The inclination is approx. 5mS.) The side tone of CW is should be heard from speaker. |
| | | | | | | |
| CW Wave Form | Mode: CW-LCW-U Electronic-keyer (dot): approx. 20mS | | | | Check | Within 10~20W |
| | | | | | | |
| Low Power | Mode: FM Power: Low | Power Meter | | | Check | 35~50W |
| | | | | | | |
| AM Power | AG output: OFF Mode: AM Power: High | | | | Check | Make sure that the power is 95~105W. |
| | | | | | | |
| Band Power | Mode: FM Band (MHz): 1.9, 3.5, 10, 14, 18, 21, 24, 28 | | | | Check | |
| | | | | | | |

PC BORD VIEW


1) CPU Unit Side A

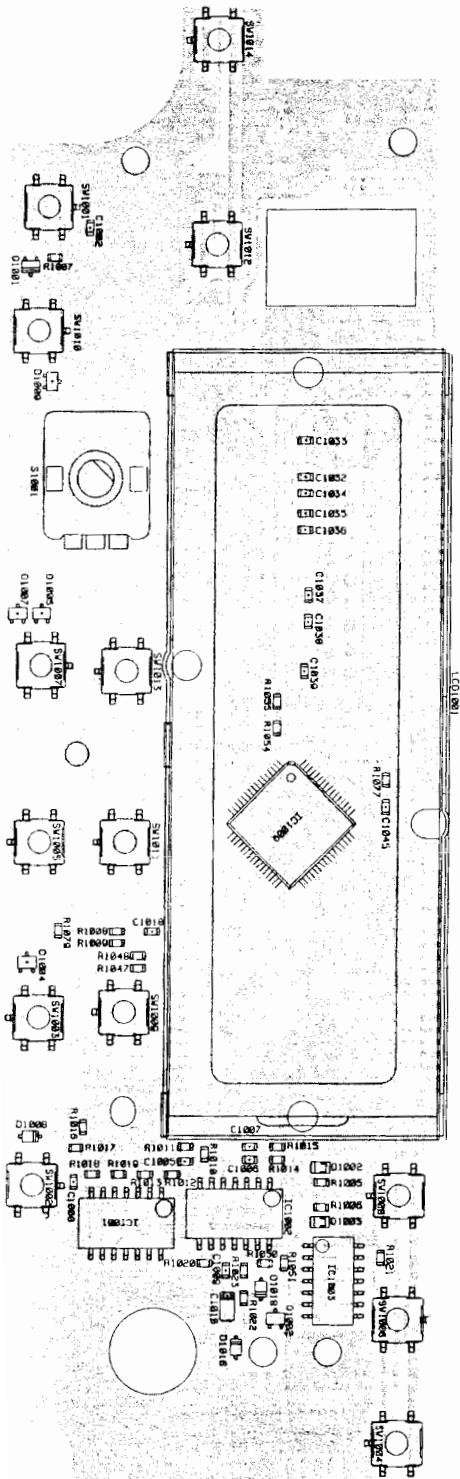


2) CPU Unit Side B

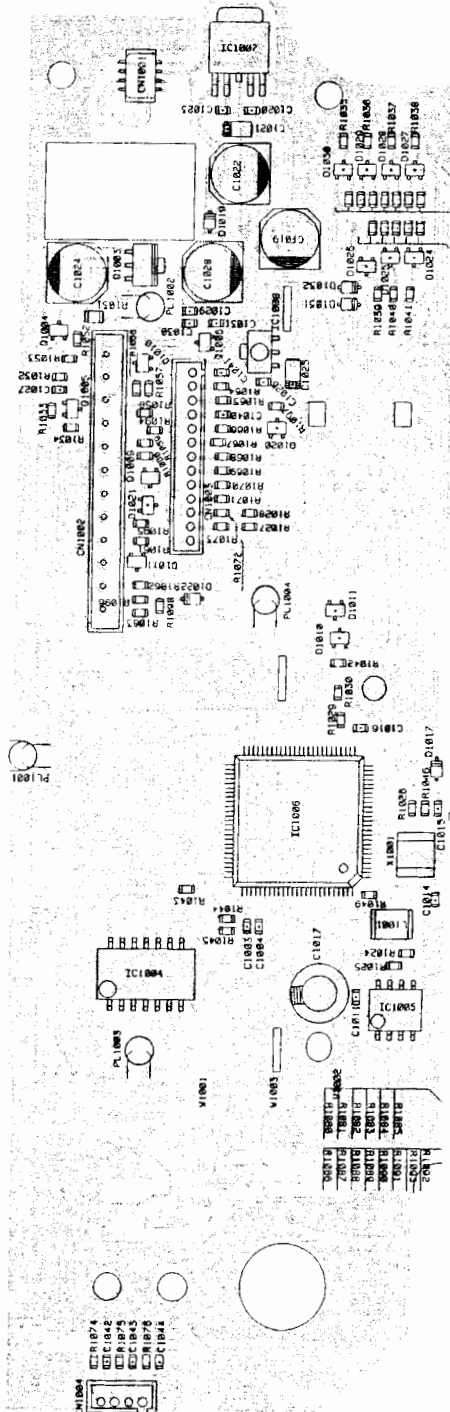


3) Vol. Unit Side A

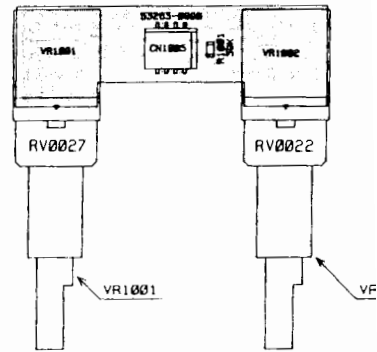


4) Vol. Unit Side B




5) Jack Unit Side A

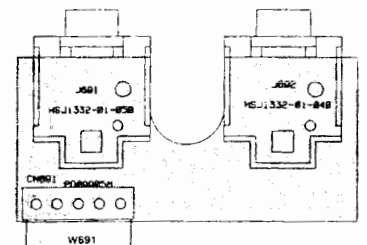


6) Jack Unit Side B

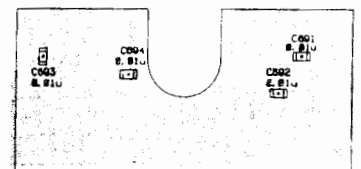


7) Main Unit Side A

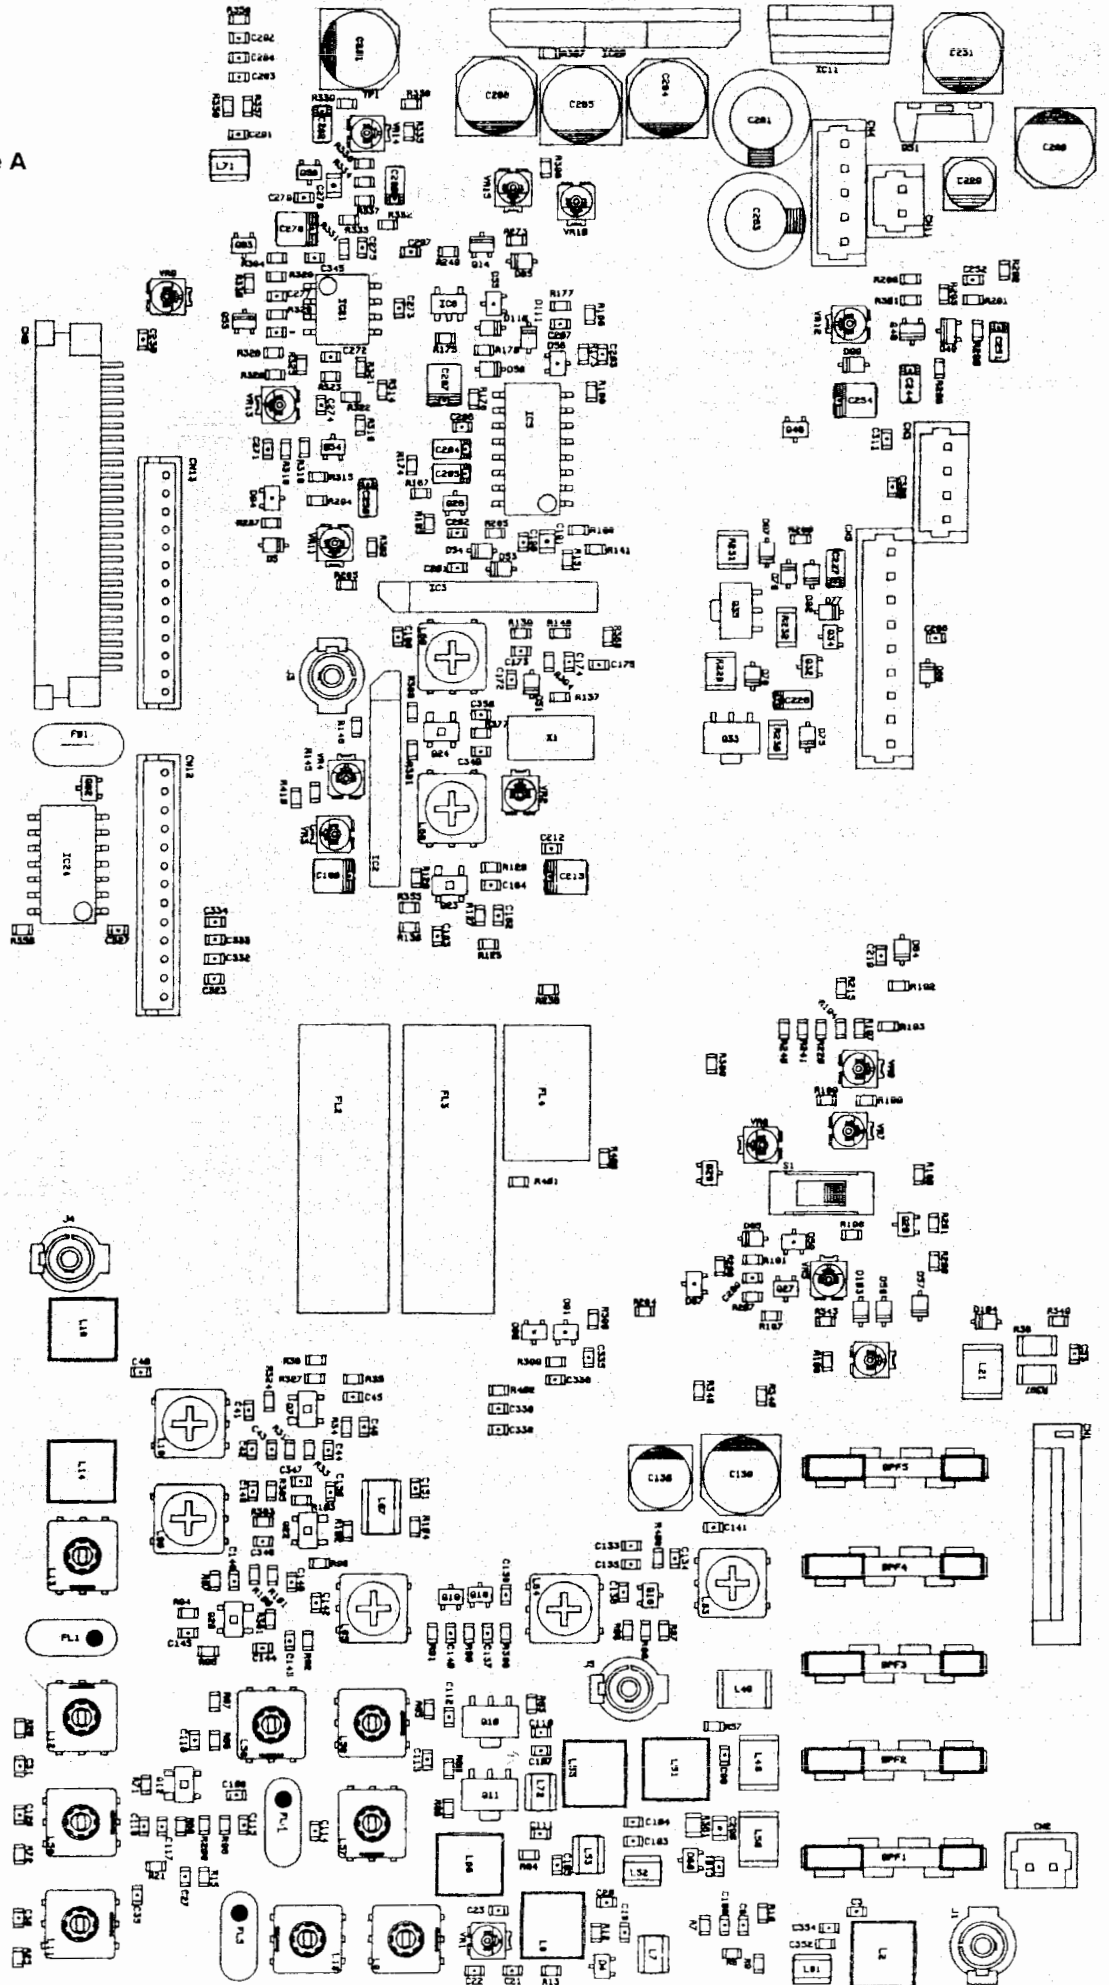


8) Main Unit Side B

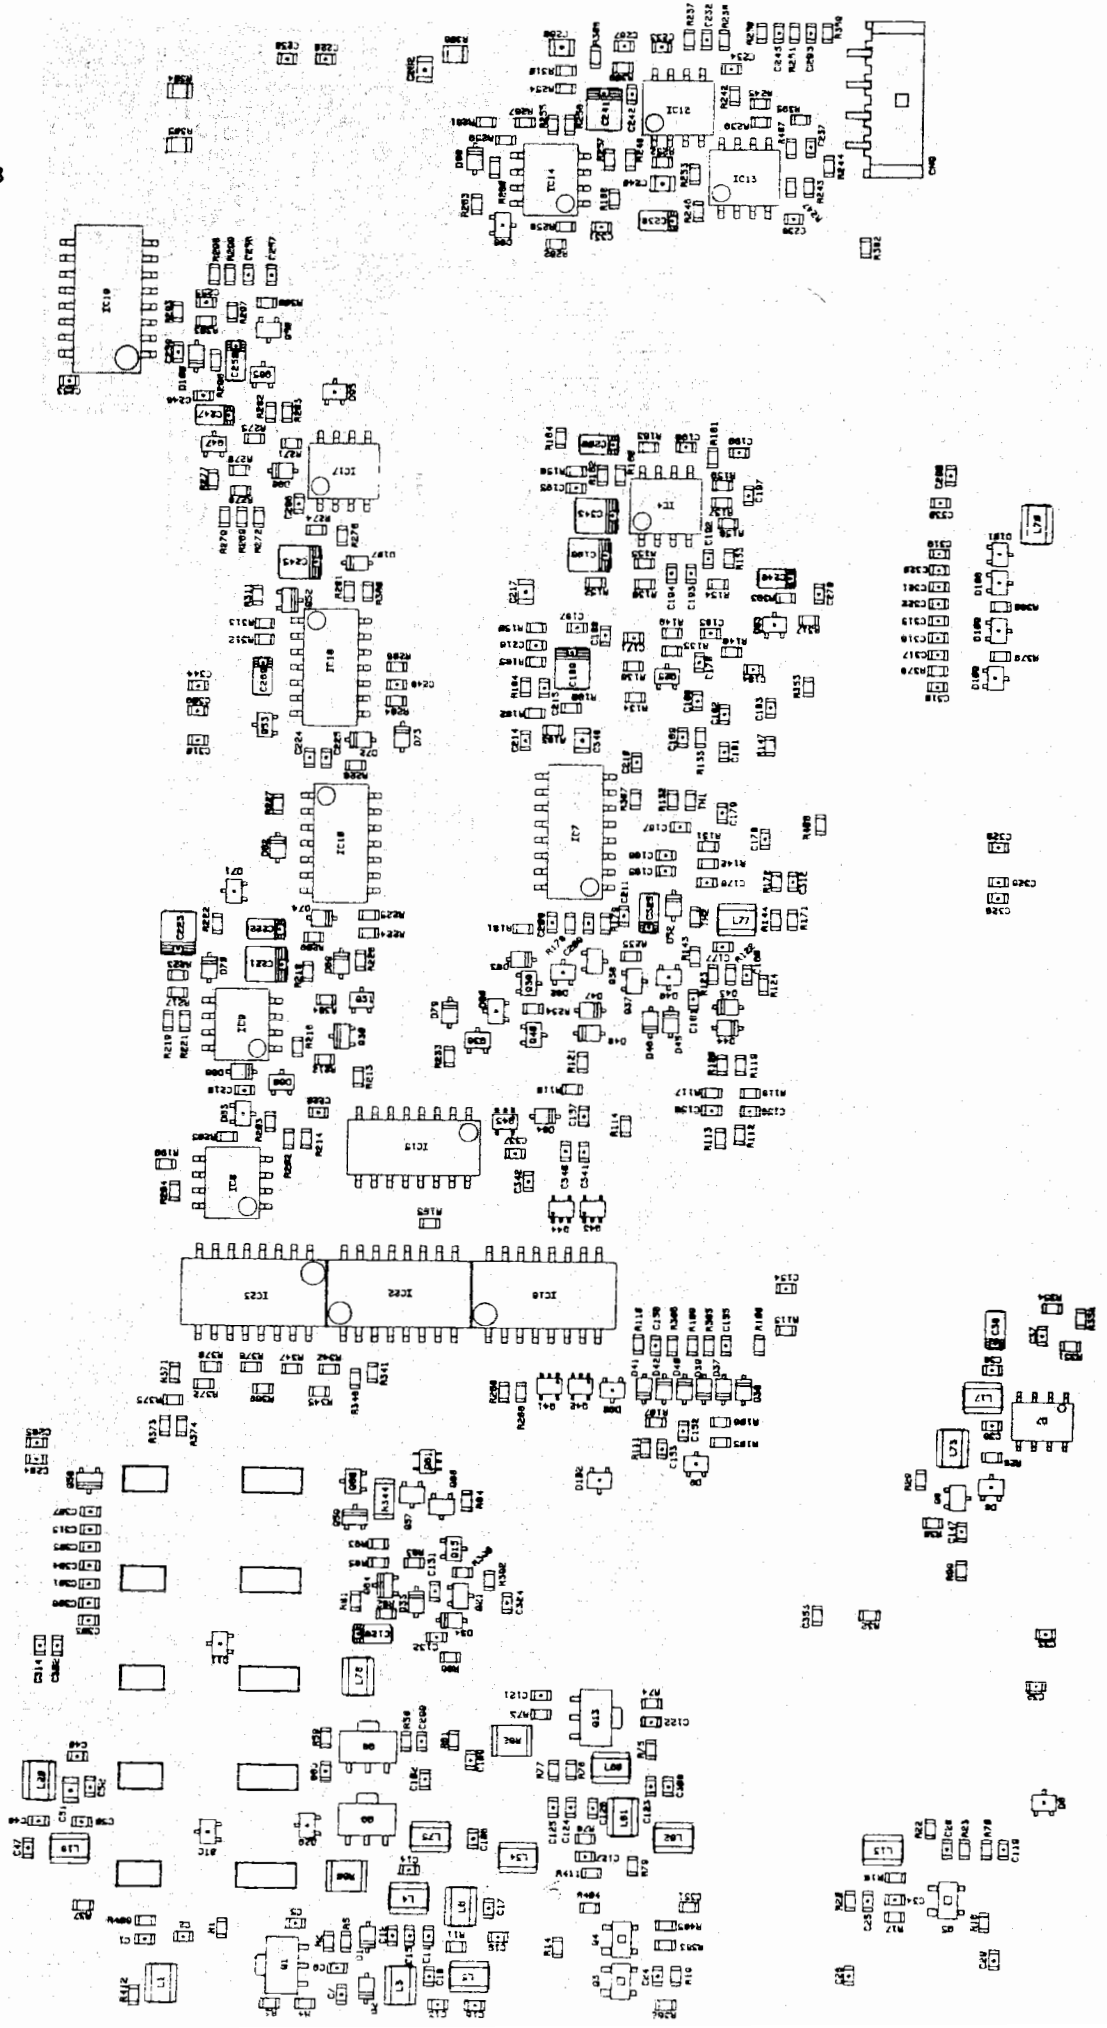


9) PA Unit Side A

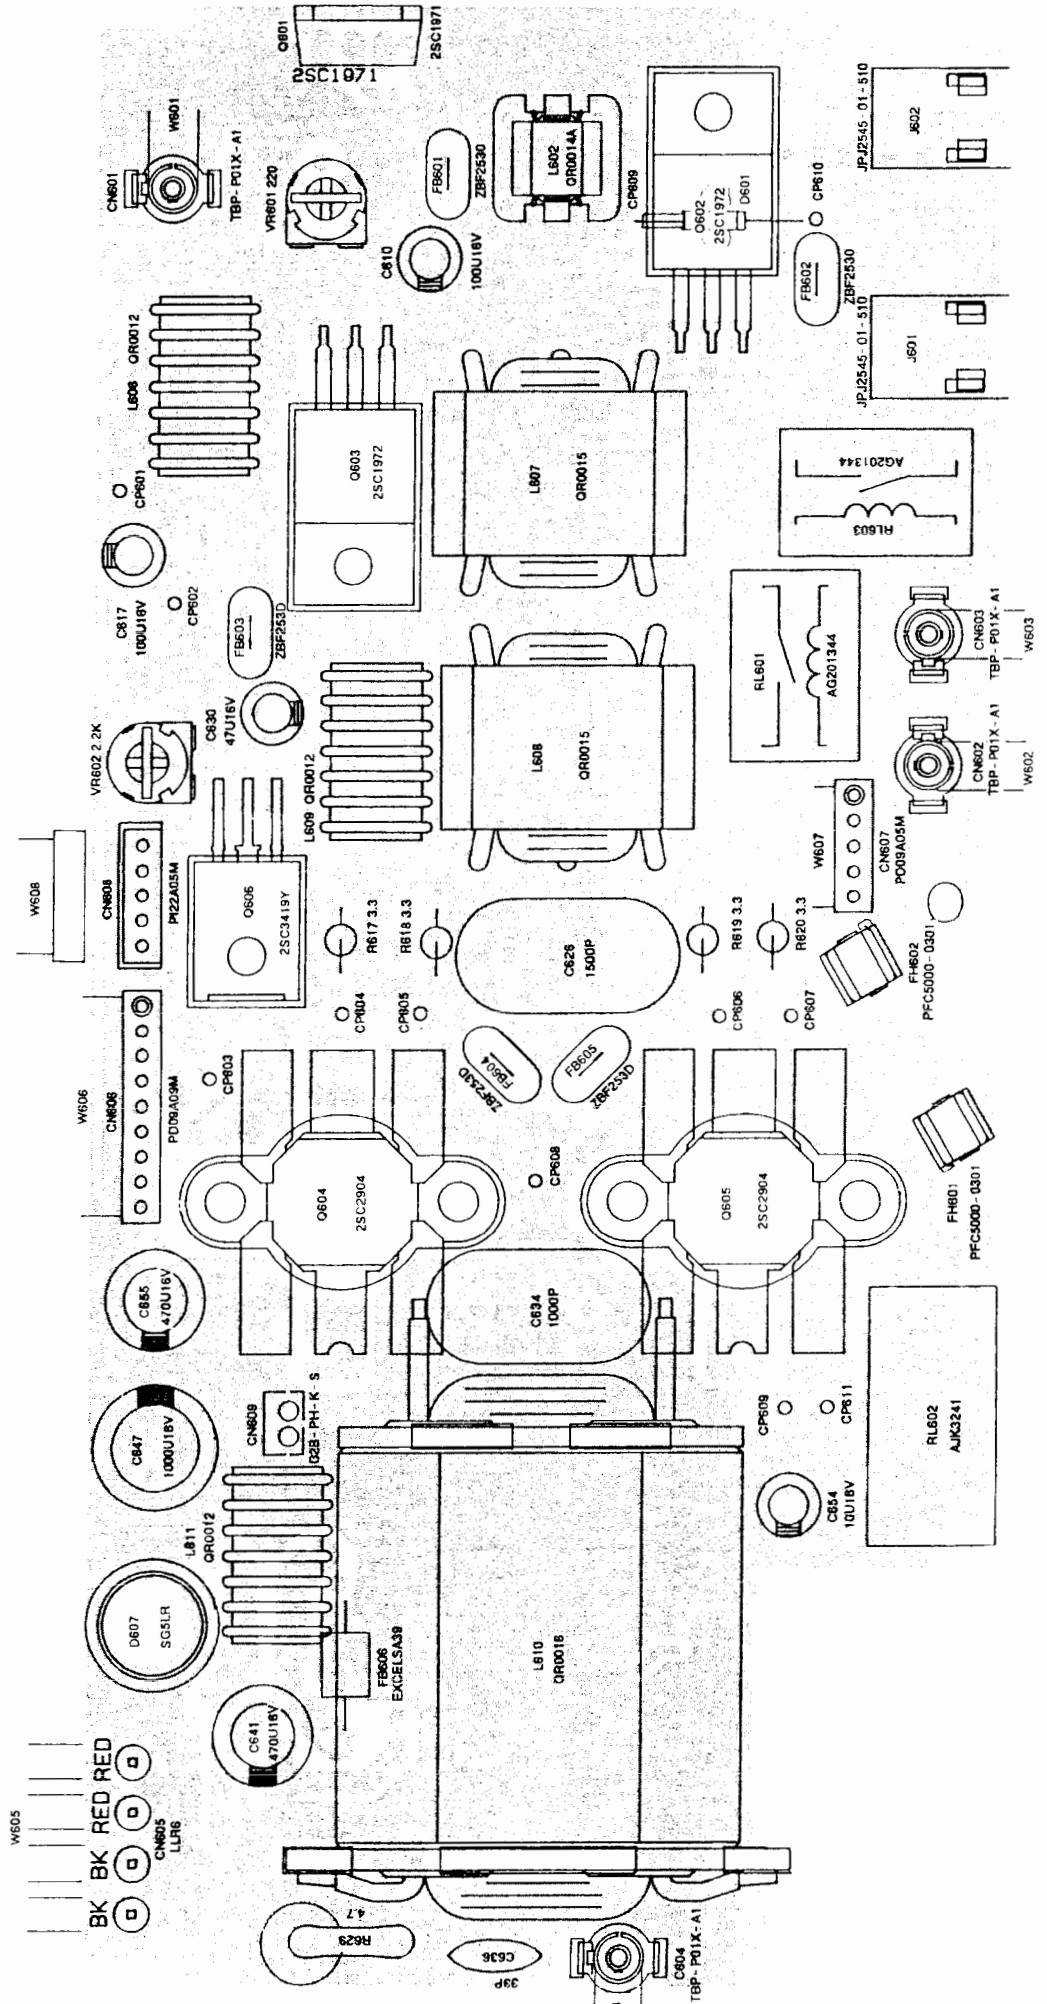

10) PA Unit Side B

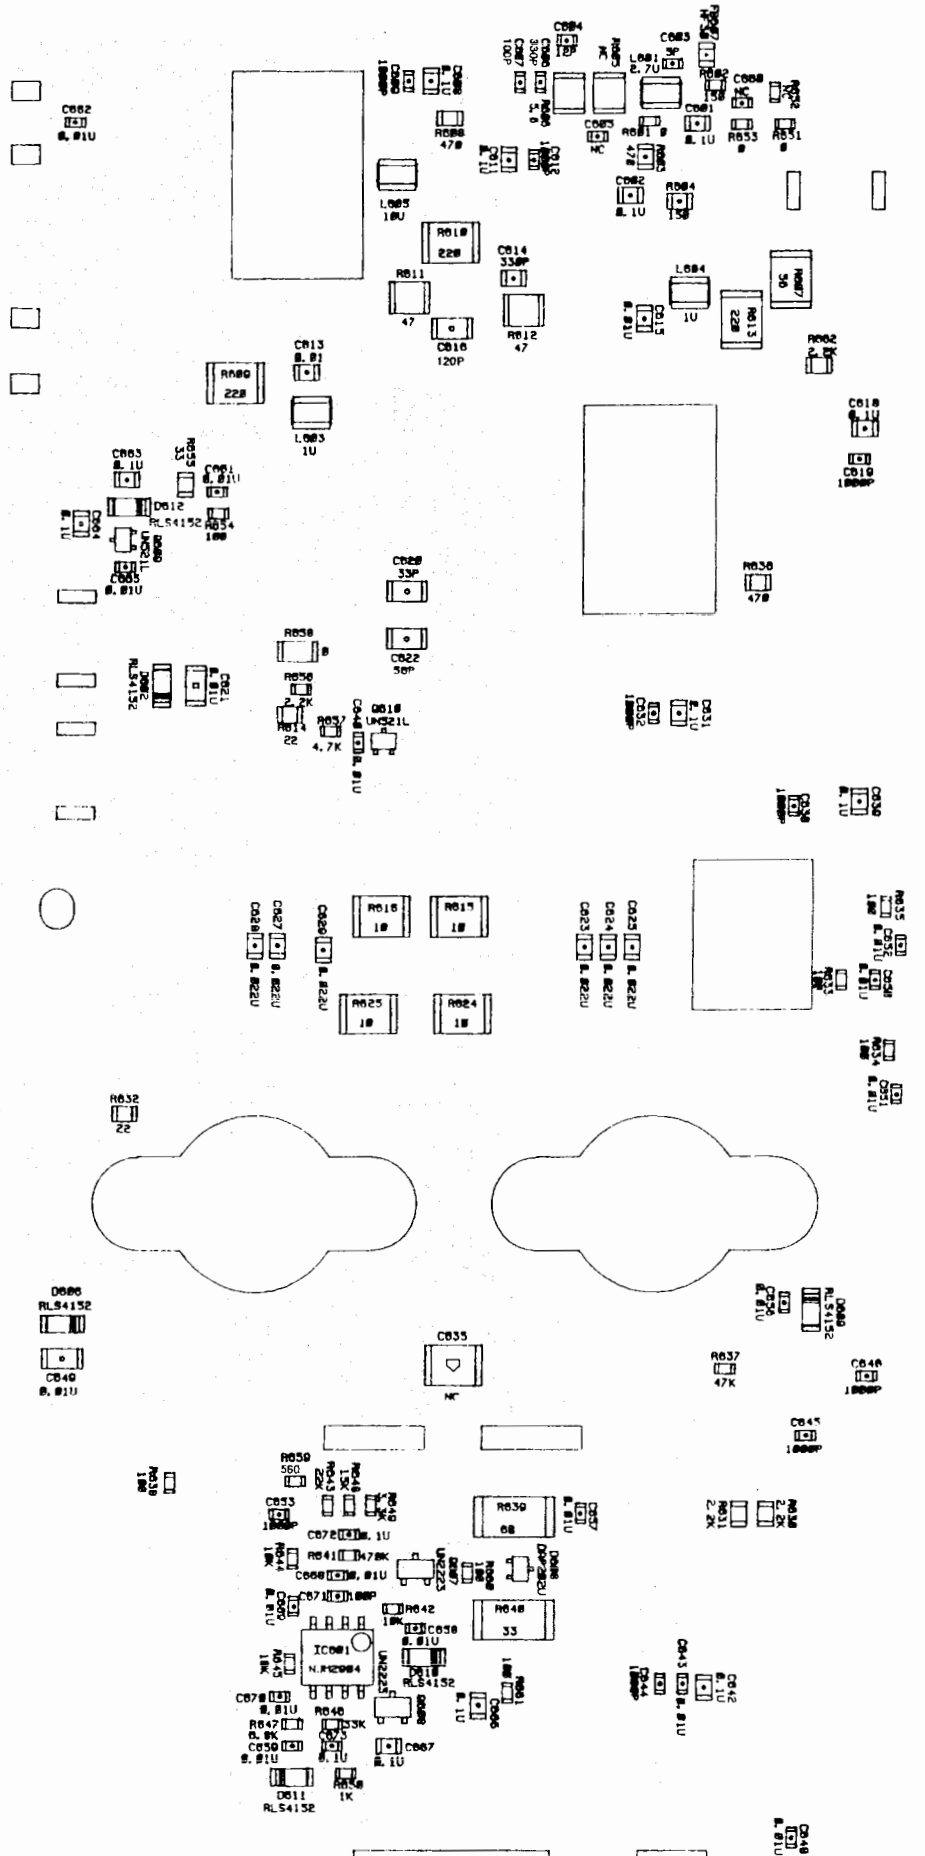


11) Filter Unit Side A

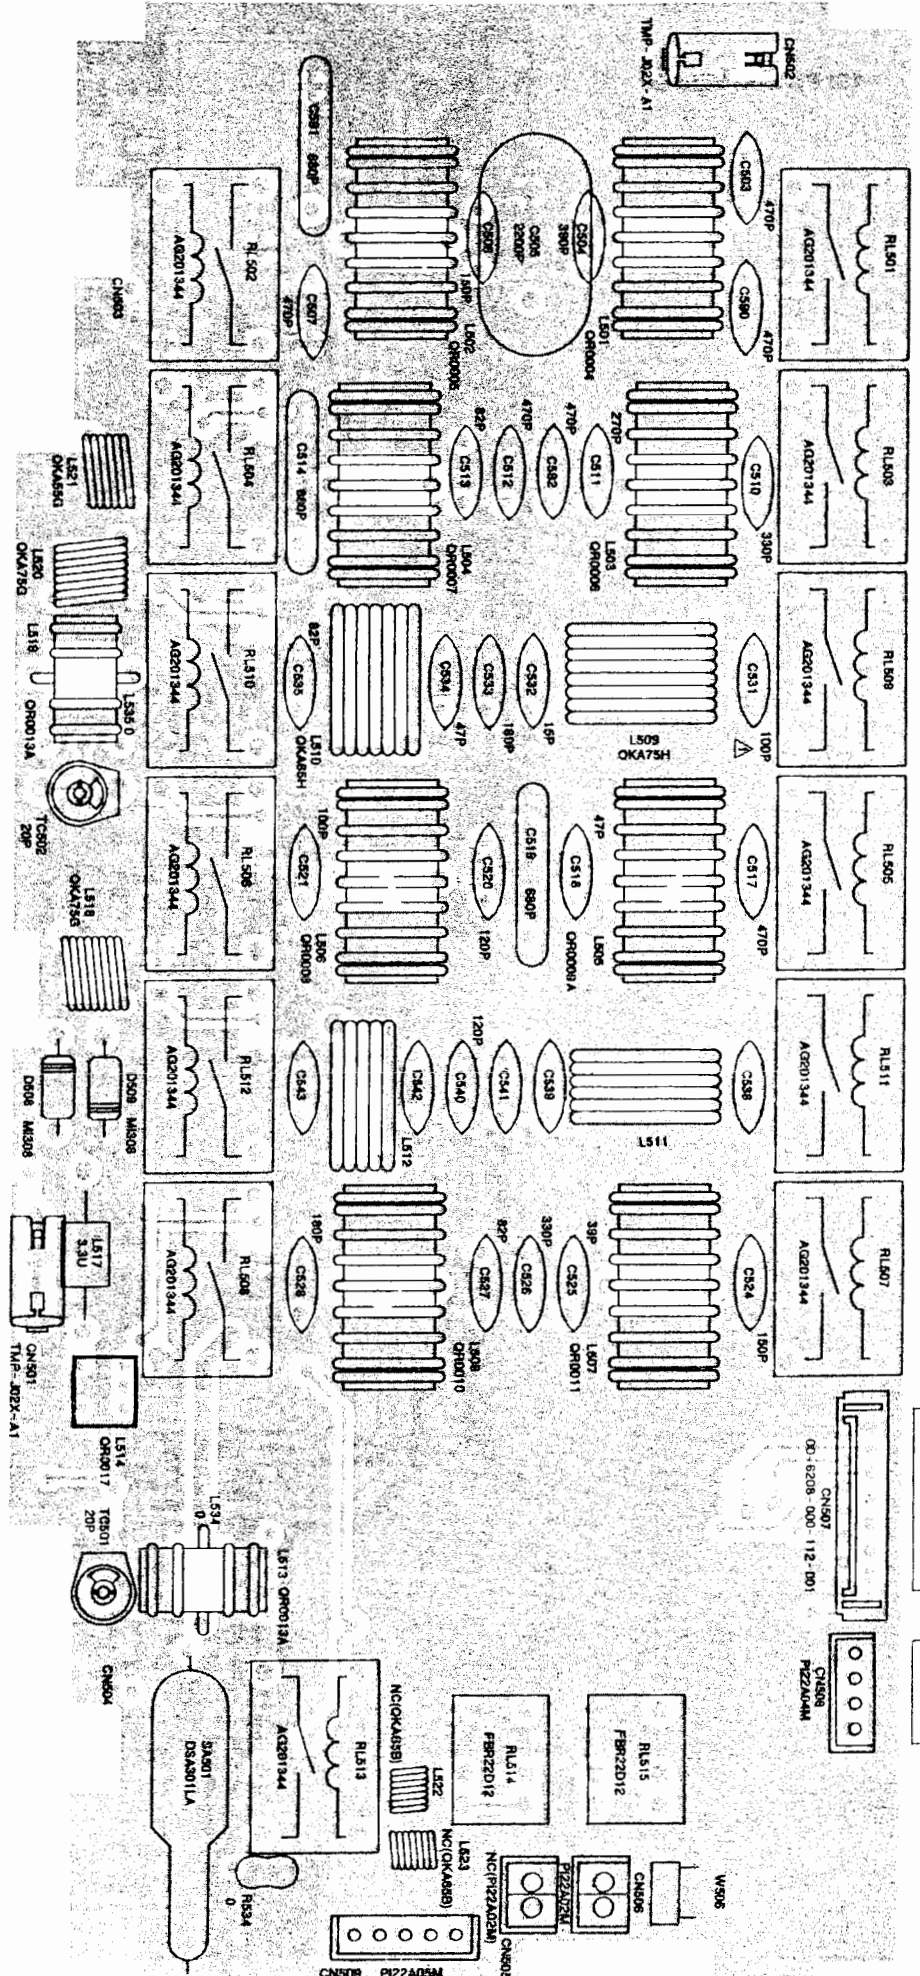


| | | | | | | | |
|--|------|------|------|--------|------|--------|--------|
| | C543 | C542 | C541 | C539 | C538 | L512 | L511 |
| | 56P | 22P | | 27P | 22P | OKA55H | OKA45H |
| | | | | DX707H | | | |


12) Filter Unit Side B

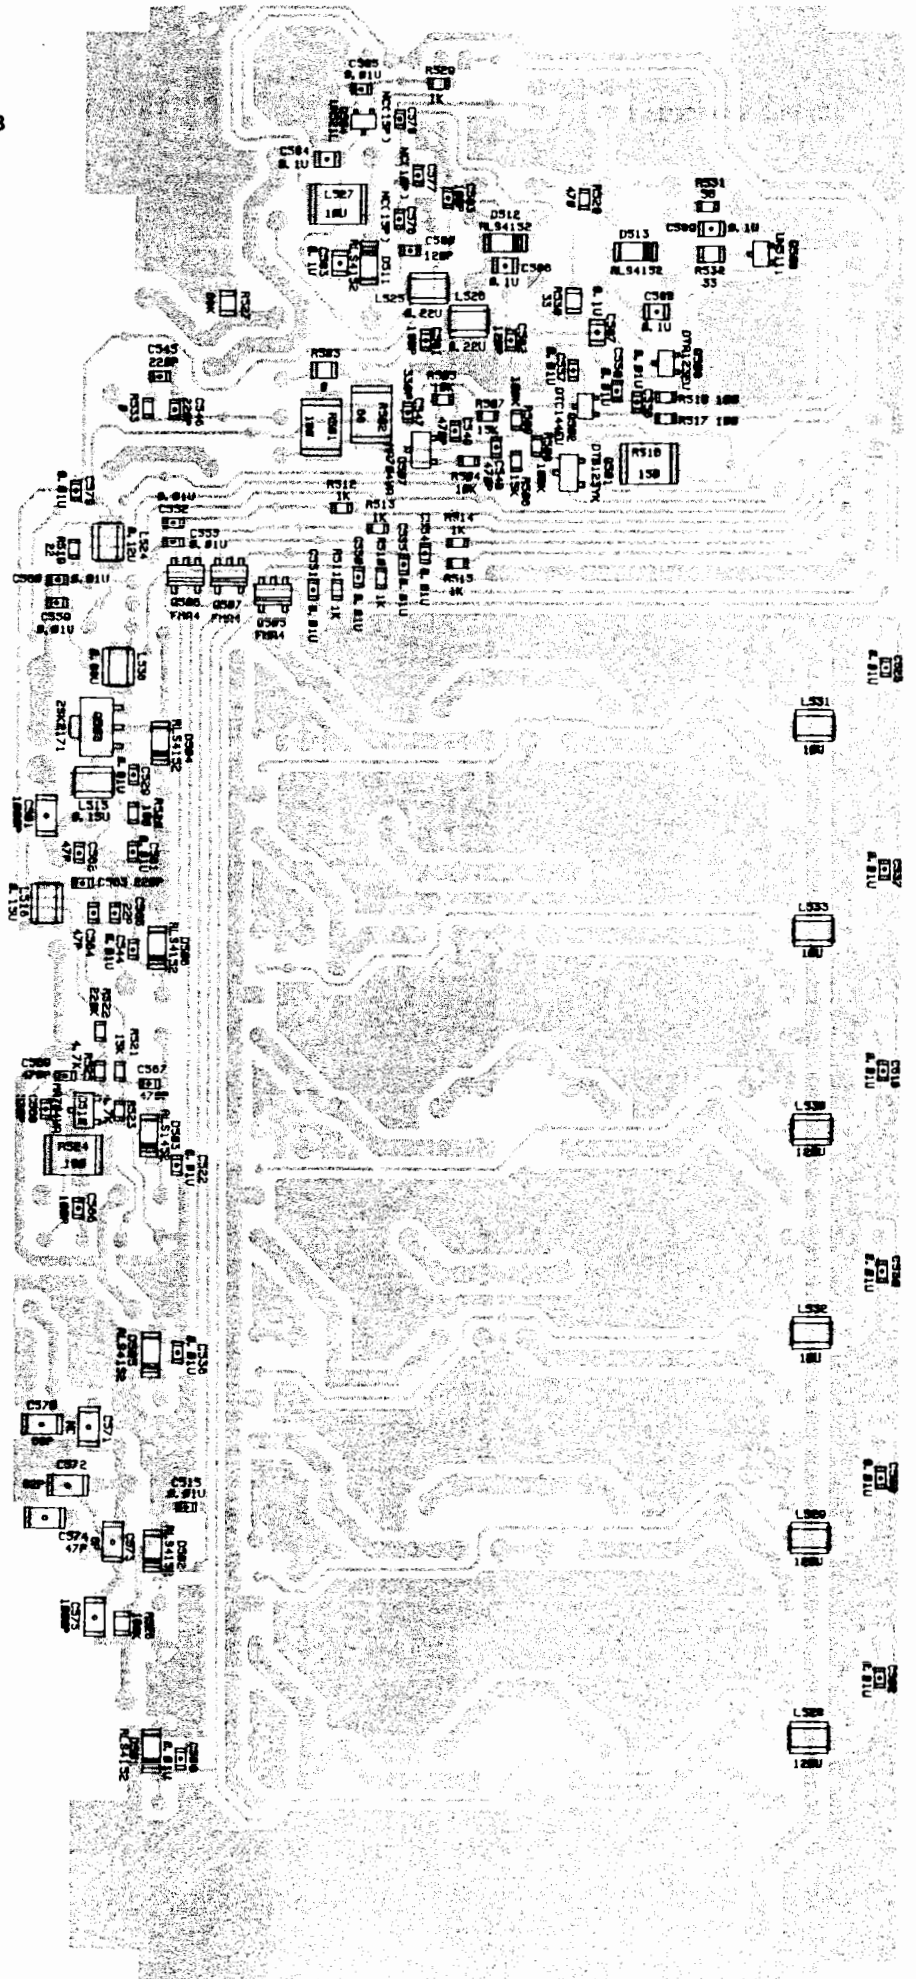


13) PLL Unt Side A

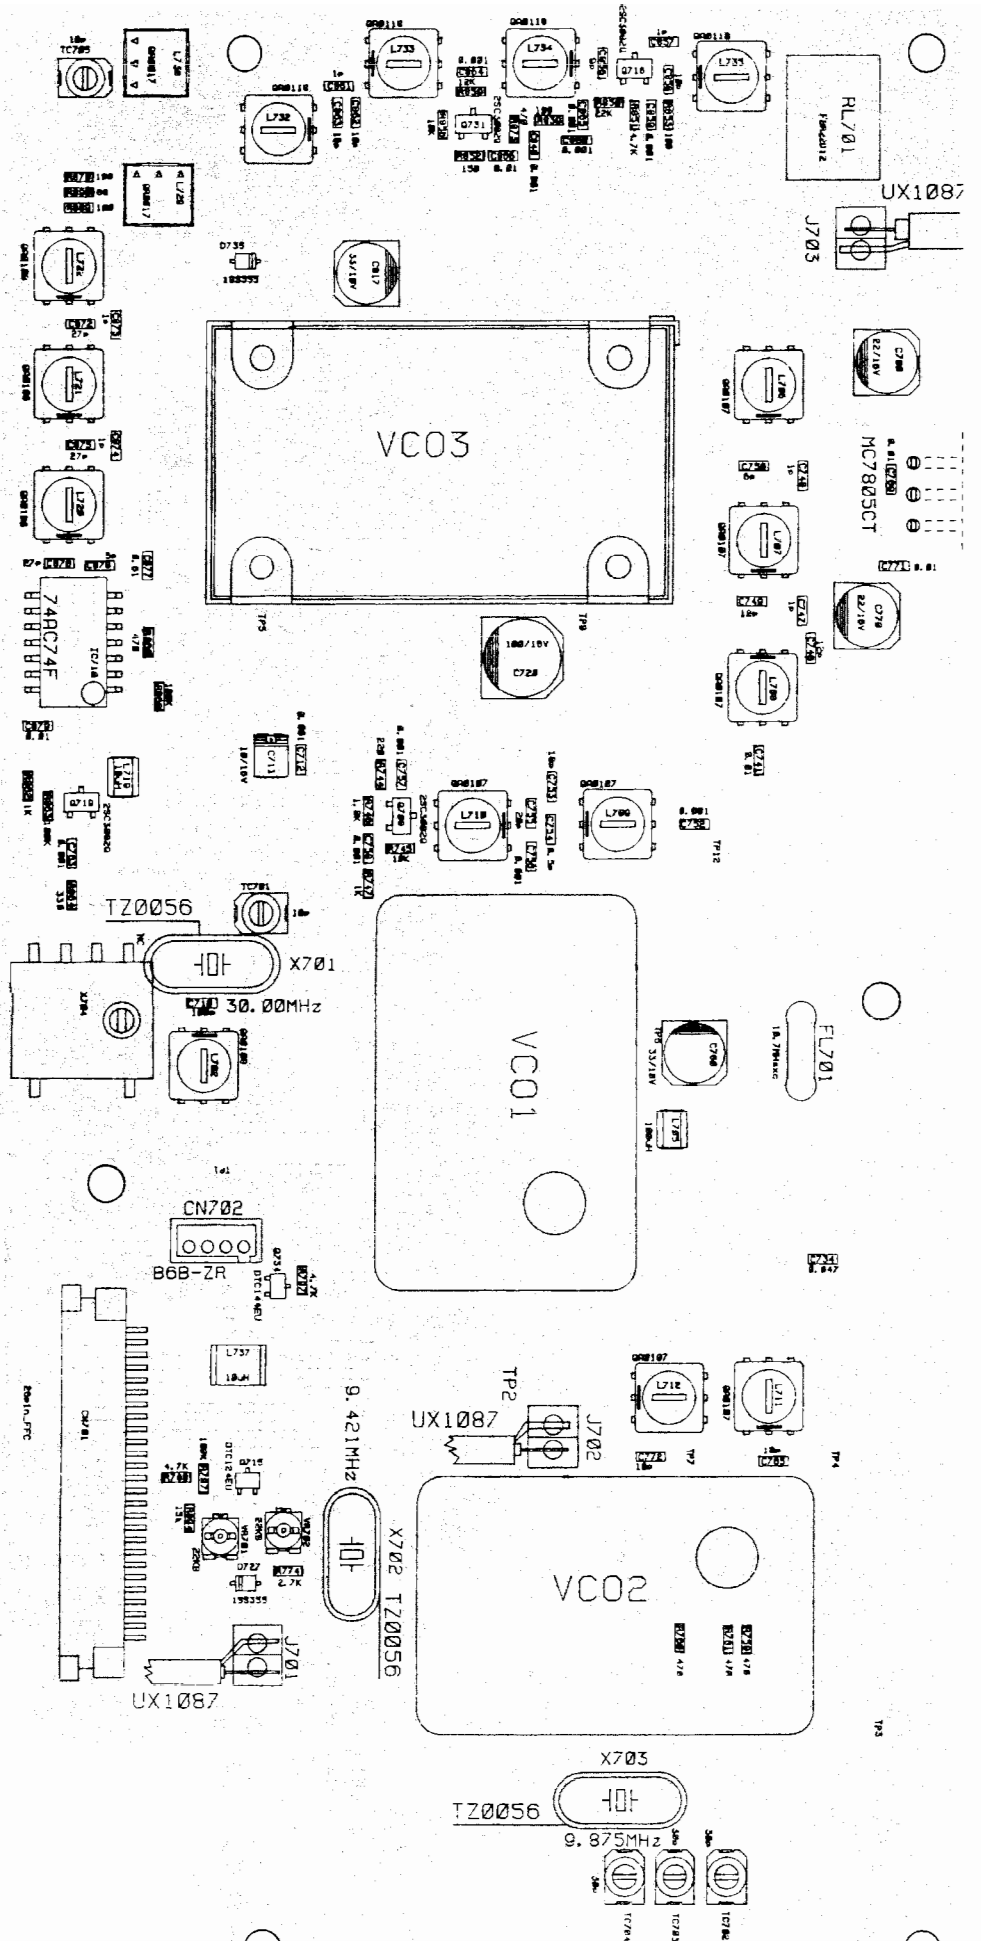

14) PLL Unit Side B

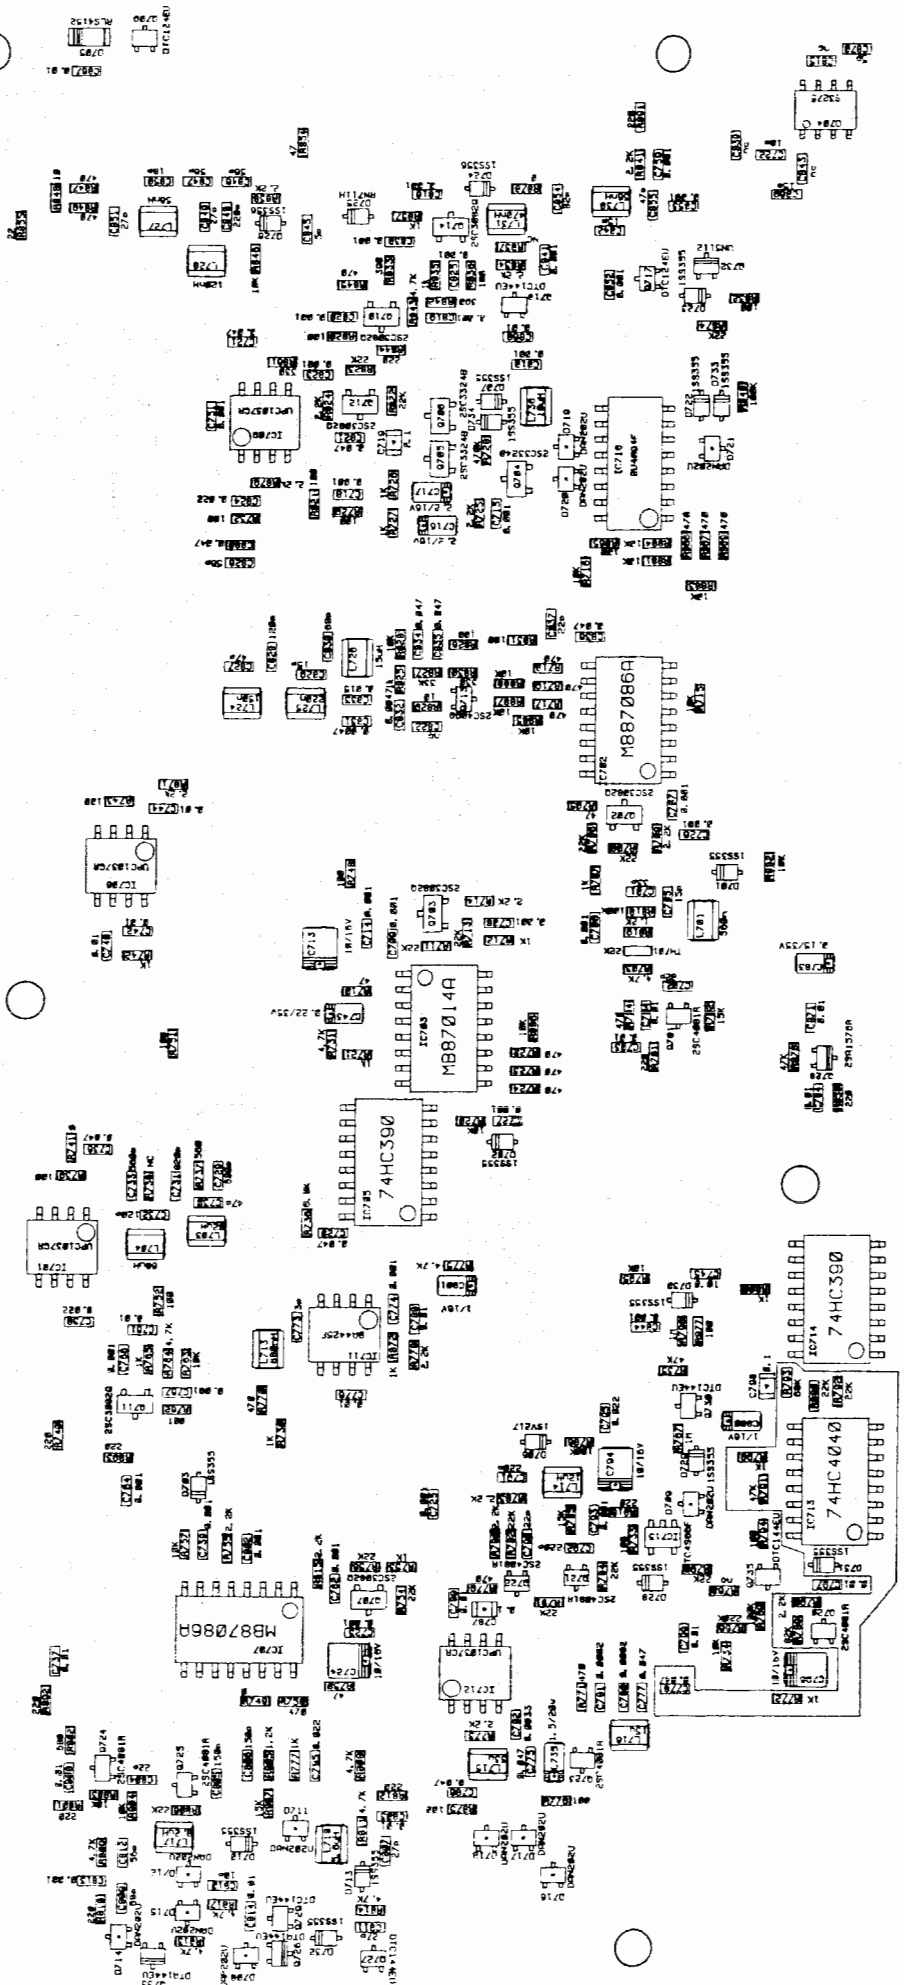


BLOCK DIAGRAM


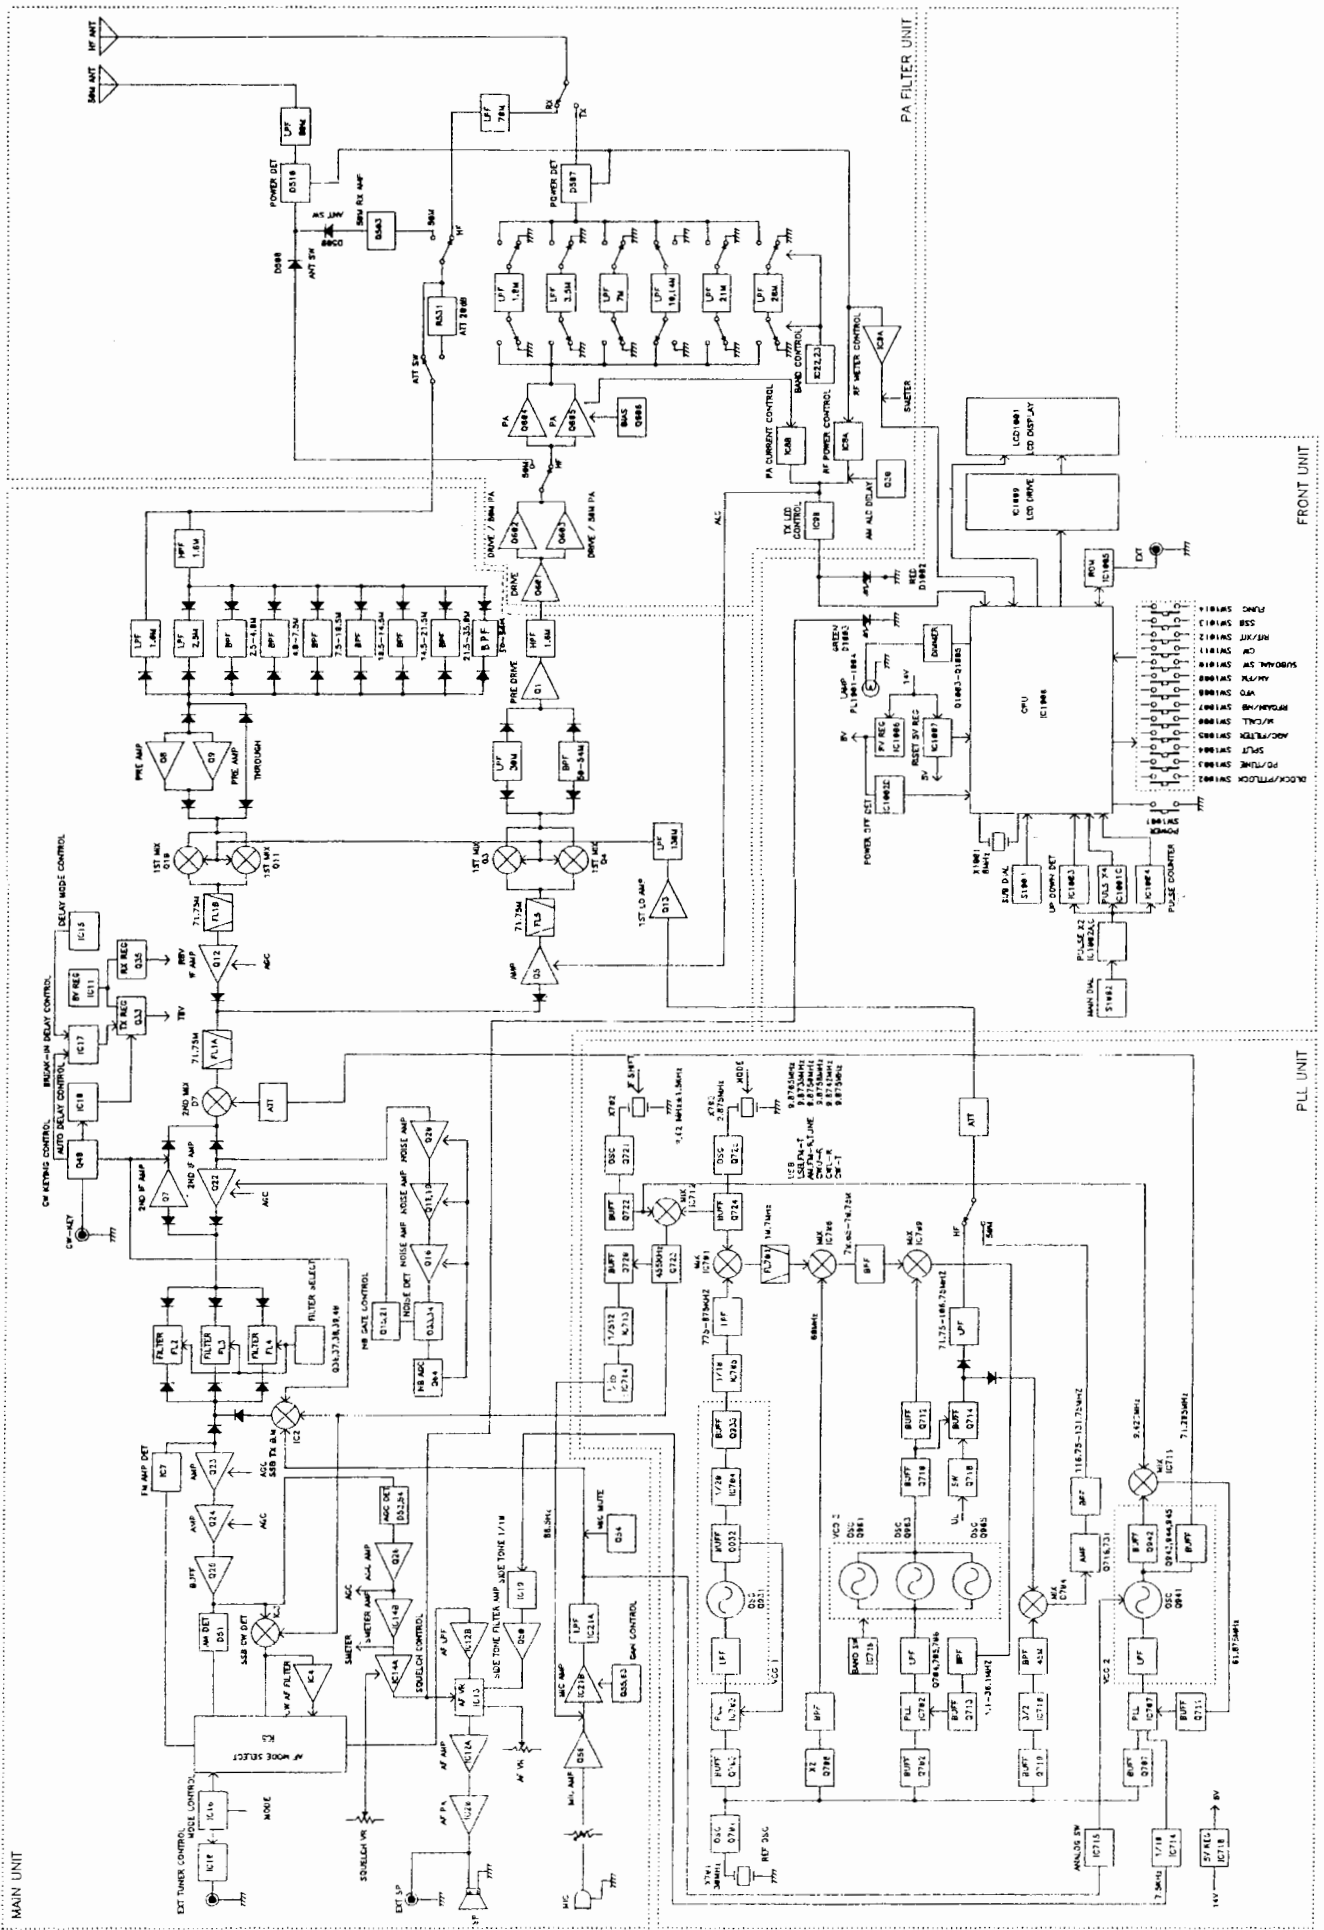






Exploded View for EDX-1






1) Front View


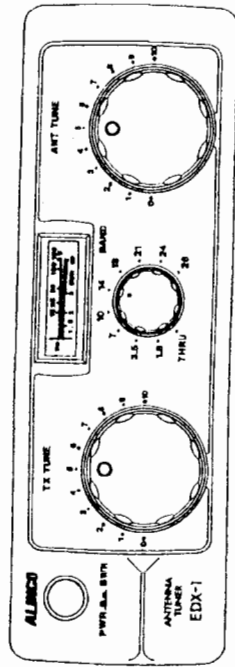


2) Rear View

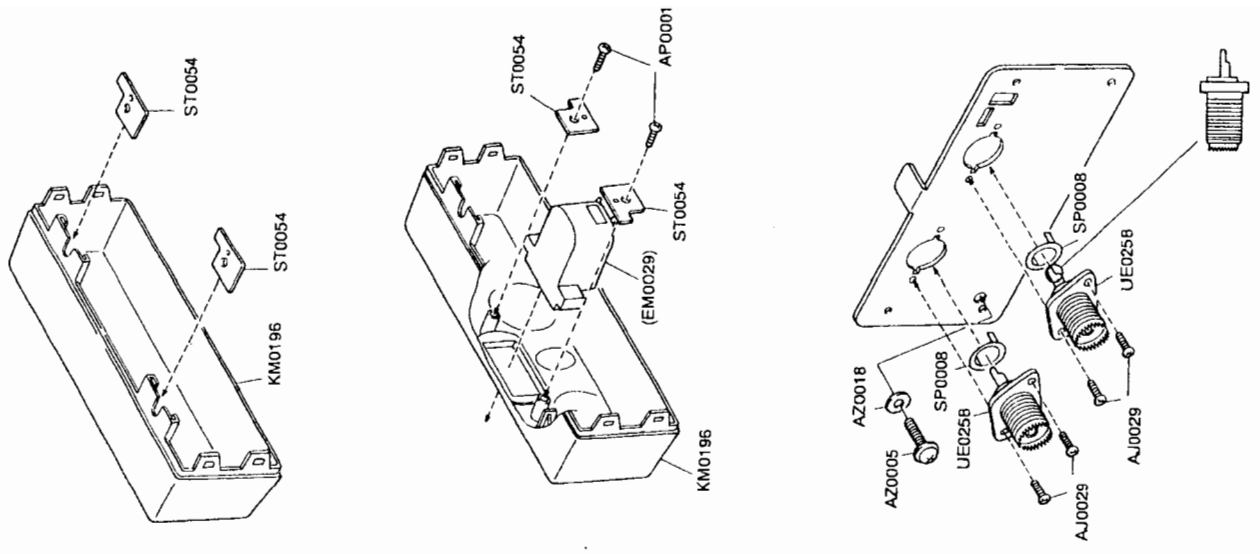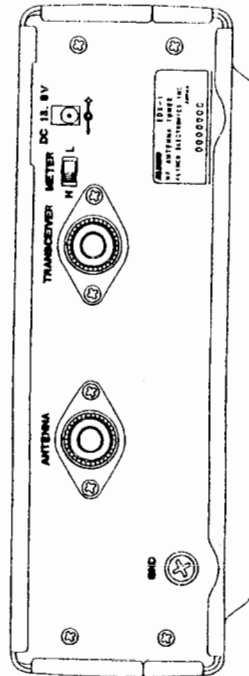

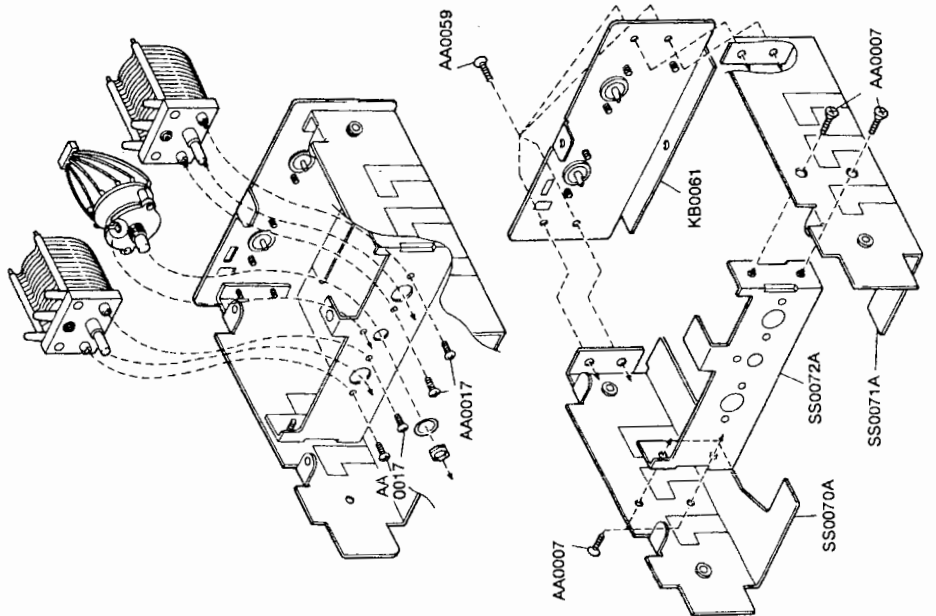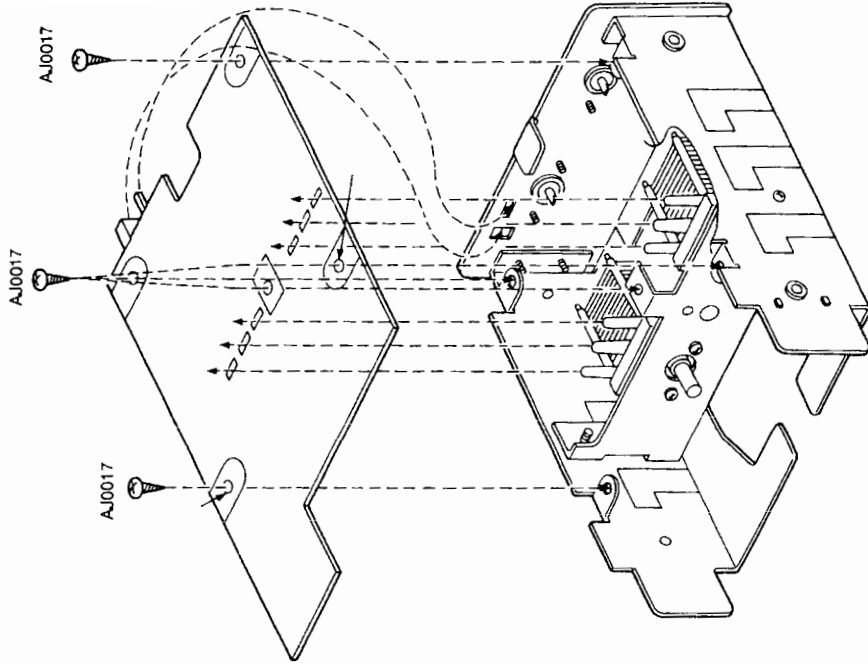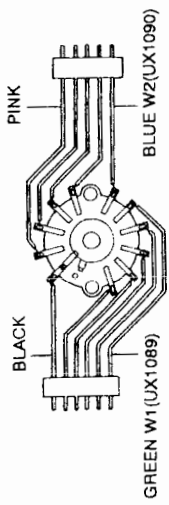

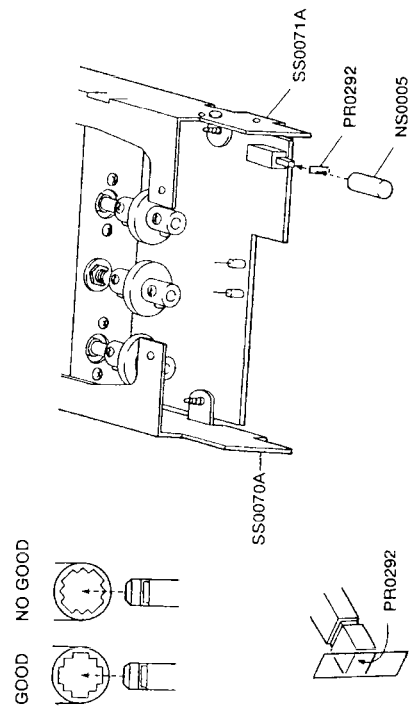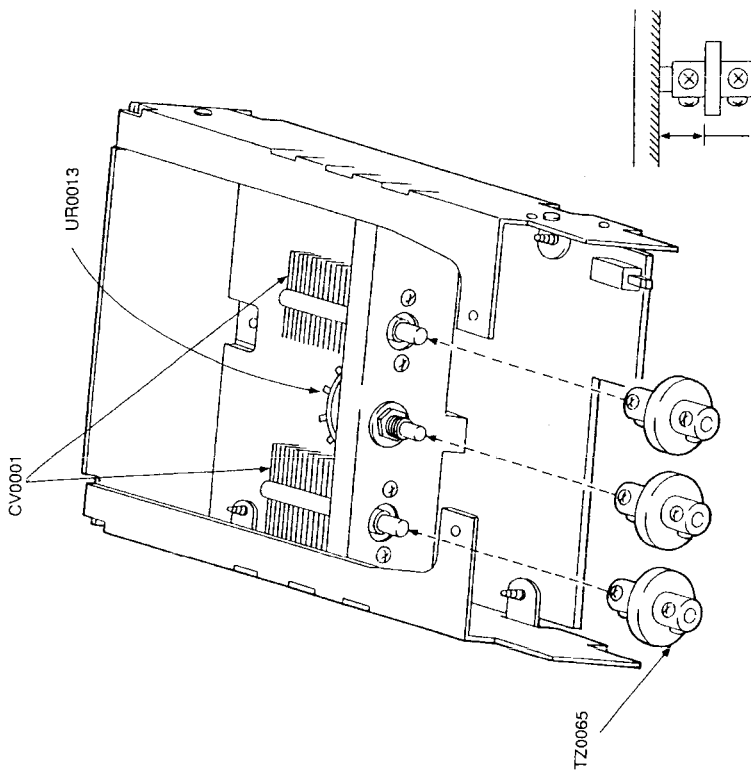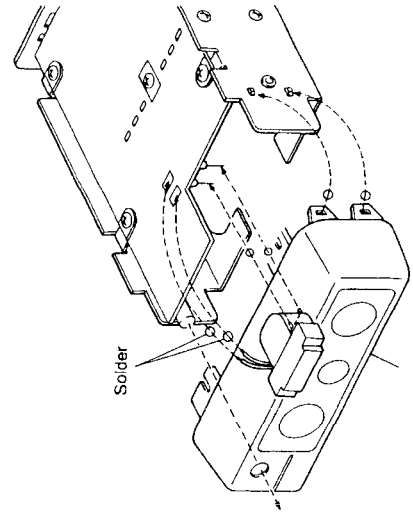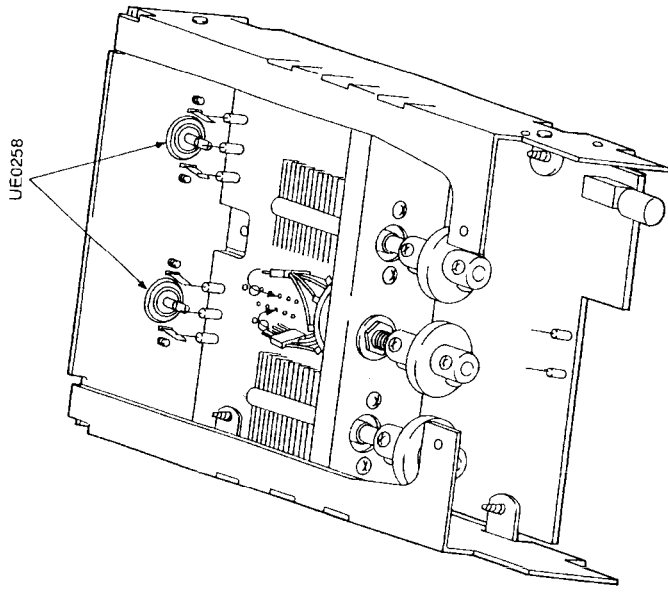

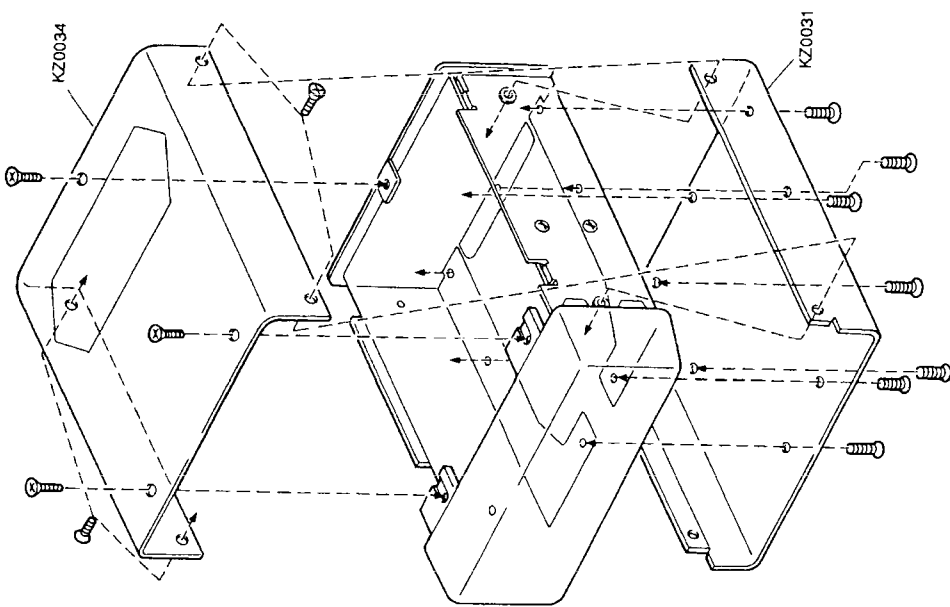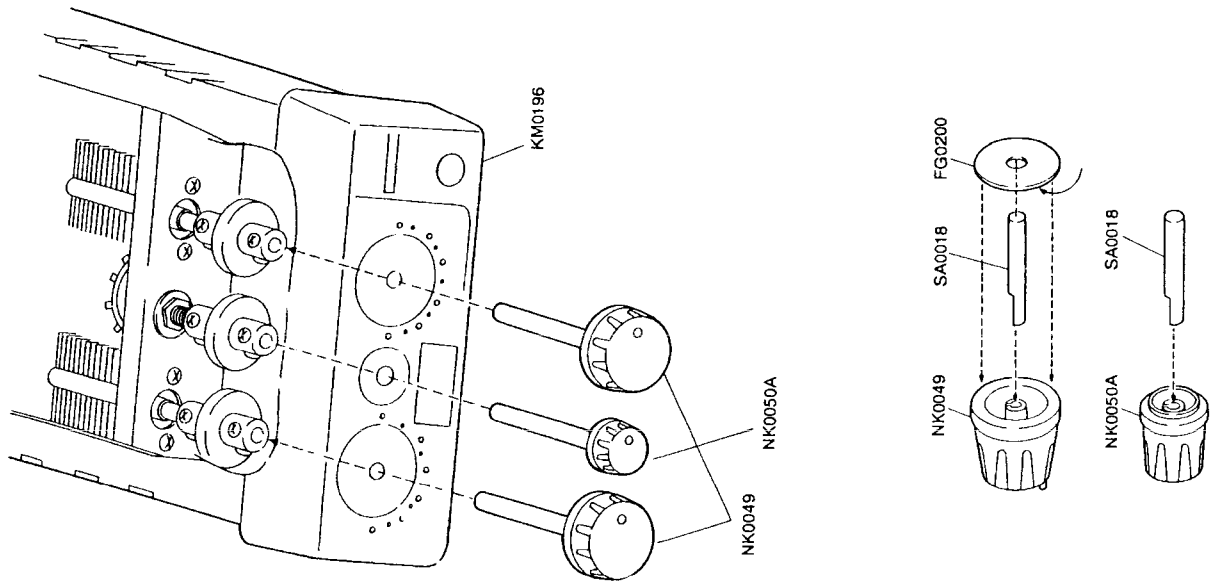

Parts List for EDX-1

EDX - 1 Tuner


| Ref. No. | Parts No. | Parts Name | Loc |
|----------|-----------|-------------------|-----|
| C1 | CJ3047 | C1608-JB1H103KT-A | A |
| C2 | CE0201 | 16W10S2 SEI | 1 M |
| C3 | CE0201 | 16W10S2 SEI | 1 M |
| C4 | CJ3047 | C1608-JB1H103KT-A | A |
| C5 | CJ3027 | C1608CH1H221KT-A | A |
| C6 | CJ3029 | C1608-JB1H331KT-A | A |
| C7 | CJ3031 | C1608-JB1H471KT-A | A |
| C8 | CJ3031 | C1608-JB1H471KT-A | A |
| C9 | CJ3101 | C1608-JB1C473KT-A | A |
| C10 | CJ3101 | C1608-JB1C473KT-A | A |
| C11 | CJ3101 | C1608-JB1C473KT-A | A |
| C12 | CJ3031 | C1608-JB1H471KT-A | A |
| C13 | CJ3044 | C1608-JB1H562KT-A | A |
| C14 | ES0060 | TMC5A1E474MTR | A |
| C15 | CJ3047 | C1608-JB1H103KT-A | A |
| C16 | CJ3047 | C1608-JB1H103KT-A | A |
| C17 | CJ3047 | C1608-JB1H103KT-A | A |
| C18 | CJ3047 | C1608-JB1H103KT-A | A |
| C19 | CJ3047 | C1608-JB1H103KT-A | A |
| C20 | CJ3047 | C1608-JB1H103KT-A | A |
| C21 | | NC NC | |
| C22 | CJ3047 | C1608-JB1H103KT-A | A |
| C23 | CJ3047 | C1608-JB1H103KT-A | A |
| C24 | CJ3047 | C1608-JB1H103KT-A | A |
| C25 | CJ3047 | C1608-JB1H103KT-A | A |
| C26 | CJ3047 | C1608-JB1H103KT-A | A |
| C27 | CJ3047 | C1608-JB1H391KT-A | A |
| C28 | CJ3030 | C1608-JB1H391KT-A | A |
| C29 | CJ3047 | C1608-JB1H103KT-A | A |
| C30 | CJ3047 | C1608-JB1H103KT-A | A |
| C31 | CS0060 | TMC5A1E474MTR | A |
| D1 | XD0273 | RLS-93 TE11 | A |
| D2 | XD0297 | M8100 TX | A |
| D3 | XD0127 | M1074WA TX | A |
| D4 | XD0273 | RLS-93 TE11 | A |
| D5 | XD0273 | RLS-93 TE11 | A |
| IC1 | XA0224 | NJM2904M-T1 JRC | A |
| IC2 | XA0224 | NJM2904M-T1 JRC | A |
| J1 | UJ0033 | HEC27B1-010520 | 1 M |
| JP1 | RD1013 | JPW02 R01 | 1 H |
| JP2 | RD1013 | JPW02 R01 | 1 H |
| JP3 | RD1013 | JPW02 R01 | 1 H |

| Ref. No. | Parts No. | Parts Name | Loc |
|----------|-----------|-----------------------|-----|
| JP4 | RD1013 | JPW02 R01 | 1 H |
| JP5 | RD1013 | JPW02 R01 | 1 H |
| JP6 | RD1013 | JPW02 R01 | 1 H |
| JP7 | RD1013 | JPW02 R01 | 1 H |
| JP8 | RD1013 | JPW02 R01 | 1 H |
| JP9 | RD1013 | JPW02 R01 | 1 H |
| JP10 | | NC NC | |
| JP11 | RK1107 | ERJ6GEY0900V | A |
| L1 | RD1013 | JPW02 R01 | 1 H |
| L2 | OR0013A | Toroidal Coil OR0013A | 1 H |
| L3 | OKB002 | Coil OKB002 | 1 H |
| L4 | OR0019 | Toroidal Coil OR0019 | 1 H |
| L5 | OR0020 | Toroidal Coil OR0020 | 1 H |
| L6 | OC0048 | | |
| O1 | XT0113 | NL325Z271-100J | A |
| O2 | XU0148 | 25C2873Y TE12L | A |
| O3 | XU0148 | DTC144EU T106 | A |
| R1 | RK0087 | DTC144EU T106 | A |
| R2 | RD0001 | ERJ4K1J151V | 1 M |
| R3 | RK4029 | ERD S2TJ 100 | A |
| R4 | RK4024 | ERJ-12VJ181H | A |
| R5 | RK3050 | ERJ-12VJ680H | A |
| R6 | RK3050 | ERJ36SVJ03V | A |
| R7 | RK3052 | ERJ36SVJ03V | A |
| R8 | RK3052 | ERJ36SVJ153V | A |
| R9 | RK3060 | ERJ36SVJ153V | A |
| R10 | RK3062 | ERJ36SVJ683V | A |
| R11 | RK3062 | ERJ36SVJ104V | A |
| R12 | RK3062 | ERJ36SVJ104V | A |
| R13 | RK3050 | ERJ36SVJ104V | A |
| R14 | RK3050 | ERJ36SVJ103V | A |
| R15 | RK3063 | ERJ36SVJ103V | A |
| R16 | RK3048 | ERJ36SVJ223V | A |
| R17 | RK3050 | ERJ36SVJ682V | A |
| R18 | RK3054 | ERJ36SVJ103V | A |
| R19 | RK3048 | ERJ36SVJ223V | A |
| R20 | RK3050 | ERJ36SVJ682V | A |
| R21 | RK3050 | ERJ36SVJ103V | A |
| R22 | RK3057 | ERJ36SVJ103V | A |
| R23 | RK3074 | ERJ36SVJ393V | A |
| R24 | RK3057 | ERJ36SVJ05V | A |
| R25 | RK3057 | ERJ36SVJ393V | A |
| R26 | RK3062 | ERJ36SVJ104V | A |


| Ref. No. | Parts No. | Parts Name | Loc |
|----------|-----------|----------------|-----|
| R27 | RK3050 | ERJ36SVJ103V | A |
| R28 | RK0001 | ERJ6GEYJ100V | A |
| R29 | RK3026 | ERJ36SVJ101V | A |
| R30 | RK3070 | ERJ36SVJ474V | A |
| R31 | RK3026 | ERJ36SVJ101V | A |
| RL1 | UL0 | SVR-12 | 1 M |
| RL2 | U-0015 | SVR-12 | 1 M |
| SW1 | U00015 | SPPJ22727A | 1 M |
| SW2 | UR0013 | SRRY101AH-R15 | 1 H |
| SW3 | US0020 | ESD1522209 | 1 M |
| TC1 | CT0036 | ECV1ZK20X64T | 1 M |
| VC1 | CV0001 | UV44B 300P | 1 H |
| VC2 | CV0001 | UV44B 300P | 1 H |
| VR1 | RH0105 | EW1YSA50BY4 | A |
| VR2 | RH0106 | EW1YSA50B04 | A |
| W1 | UX1089 | Wires EDX-1 | 1 H |
| W2 | UX1090 | Wires EDX-1 2 | 1 H |
| W3 | UX1091 | Wires EDX-1 3 | 1 H |
| W4 | UX1091 | Wires EDX-1 3 | 1 H |
| UP0291 | | EDX-1 PC Board | 1 T |

| Ref. No. | Parts No. | Parts Name | Loc |
|----------|-----------|------------|-----|
| | | | |

Connection Example

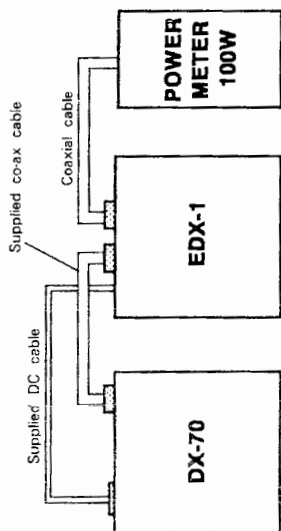

Adjustment Point

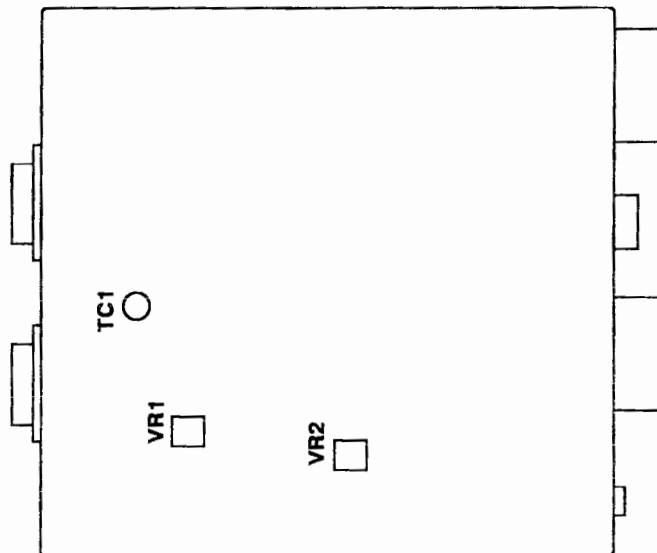

Required Test Equipment for EDX-1


| TX ON | BAND | SWR | METER | TX TUNE | ANT TUNE | METER READING | UNIT |
|-----------------|------|-----|-------|---------|----------|---------------------------|------|
| 14.1MHz 100W | 1.8 | ON | H | 10 | 10 | ∞ | SWR |
| 14.1MHz 100W | THRU | OFF | H | - | - | 100W | PWR |
| 14.1MHz 10W | THRU | OFF | L | - | - | 10W (100W on scale) | PWR |
| 1.9MHz 100W | 1.8 | ON | H | 4 | 4 | 1.5max. | SWR |
| 3.6MHz 100W | 3.5 | ON | H | 7 | 7 | 1.5max. | SWR |
| 7.1MHz 100W | 7 | ON | H | 6 | 6 | 1.5max. | SWR |
| 10.1MHz 100W | 10 | ON | H | 7.5 | 7.5 | 1.5max. | SWR |
| 14.1MHz 100W | 14 | ON | H | 8 | 8 | 1.5max. | SWR |
| 18.1MHz 100W | 18 | ON | H | 8.5 | 8.5 | 1.5max. | SWR |
| 21.1MHz 100W | 21 | ON | H | 9 | 9 | 1.5max. | SWR |
| 24.9MHz 100W | 24 | ON | H | 9 | 9 | 1.5max. | SWR |
| 28.1MHz 100W | 28 | ON | H | 9 | 9 | 1.5max. | SWR |

Adjustment for EDX-1


| DX-70 TX FREQ. 14.1MHz TX POWER 100W | | | | | | |
|---|-----|-------|---------|----------|--------------|---------------|
| BAND | SWR | METER | TX TUNE | ANT TUNE | ADJUST POINT | METER READING |
| THRU | ON | H | - | - | TC 1 | MIN |
| 1.8 | ON | H | 10 | 10 | VR 2 | ∞ |
| THRU | OFF | H | - | - | VR1 | 100W |

PC Bord View for EDX-1

Side A

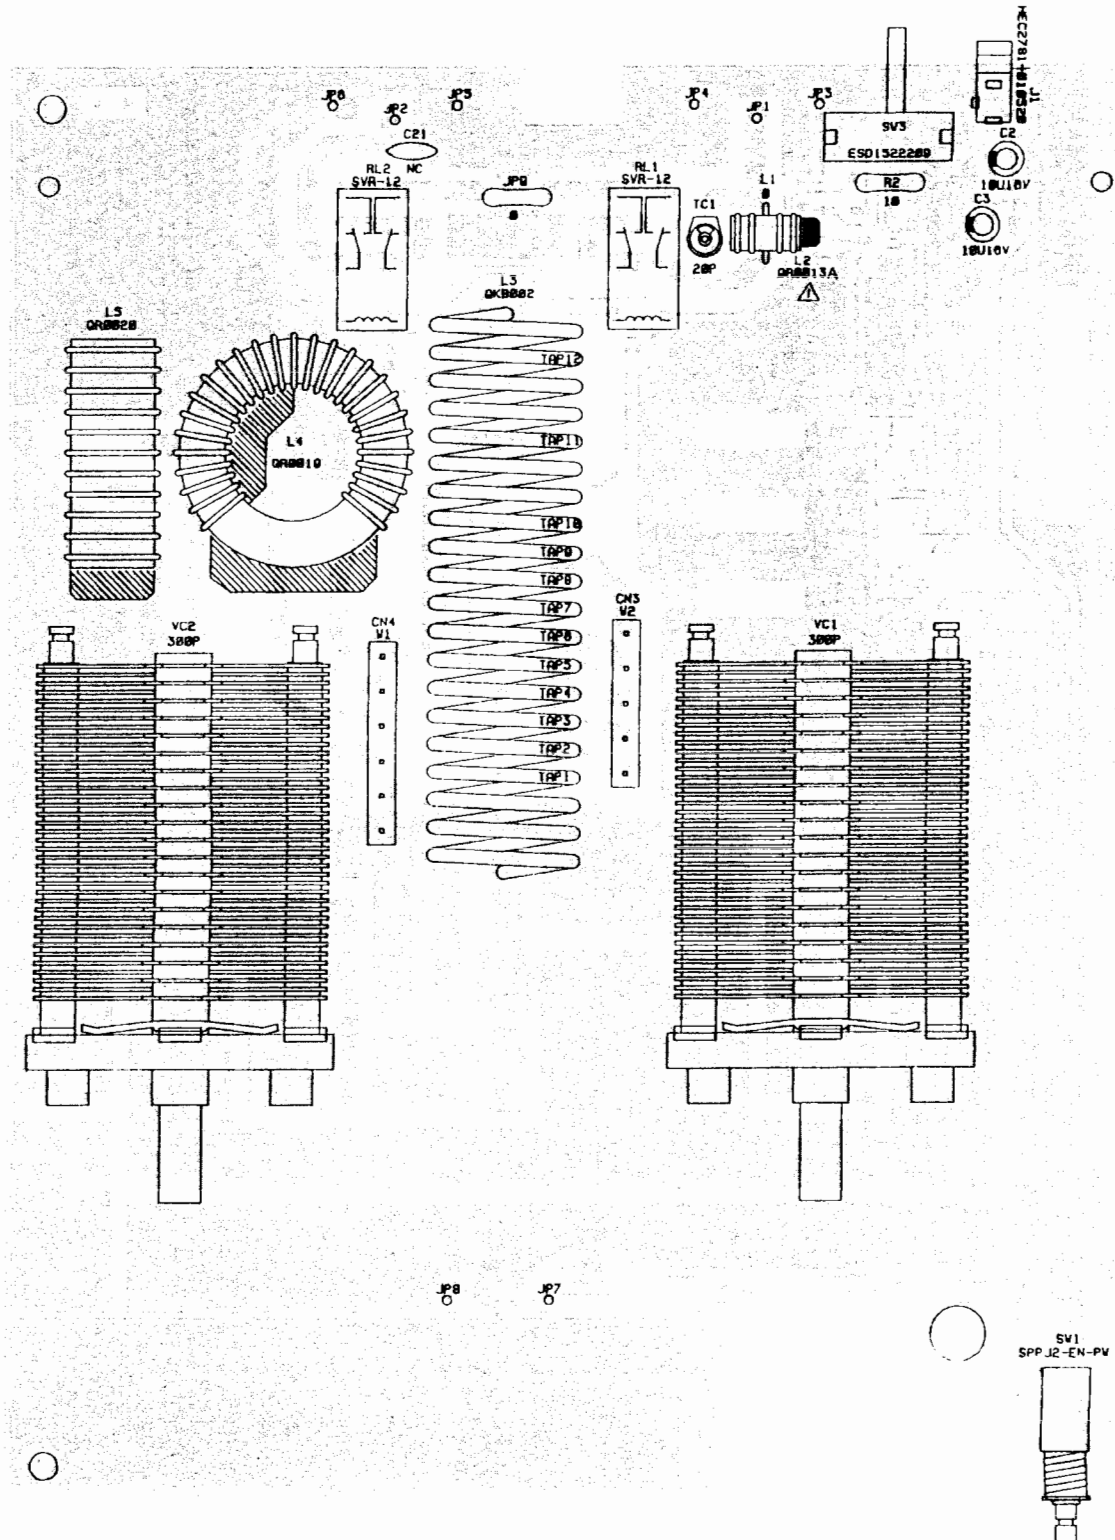

Side B

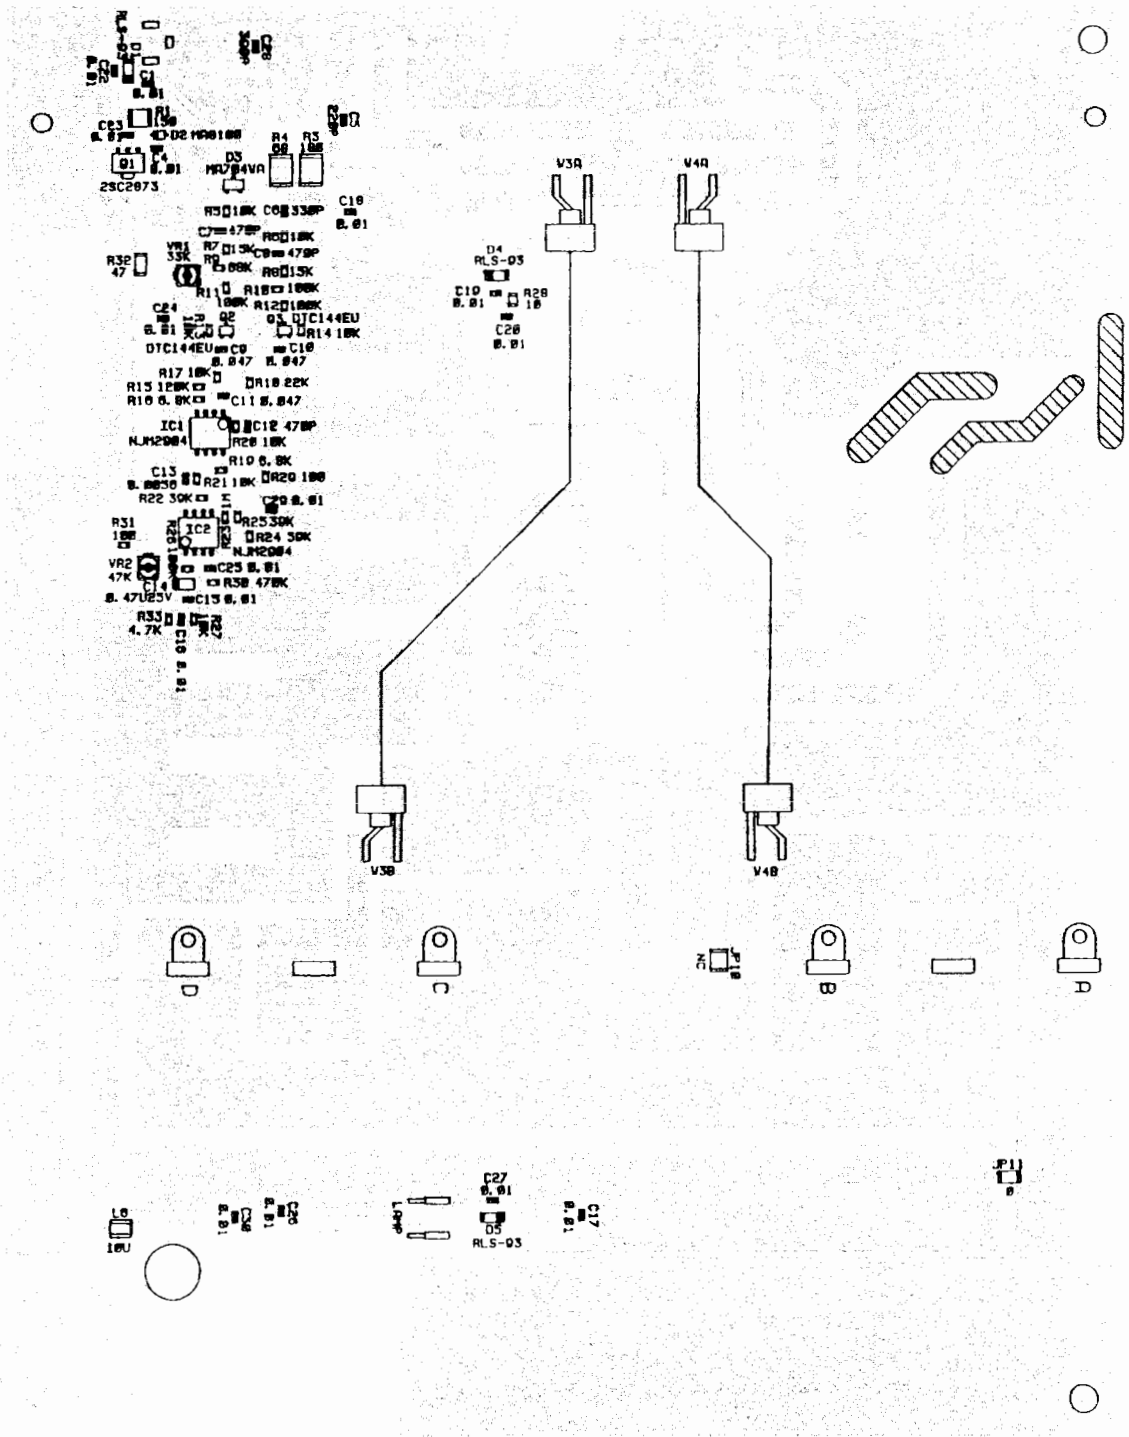

Schematic Diagram for EDX-1

